



CONSEW

CAUTION


OPERATOR'S GUIDE

**KEEP HANDS OFF MOVING PARTS
SHUT OFF POWER
BEFORE MAKING ANY ADJUSTMENTS**

CYLINDER BED SEWING MACHINE

LUBRICATION (without LUBRICATION SYSTEM MACHINES)

Use white spindle oil. When starting the machine initially and after kept away for a long time without using at all, oil sufficiently to respective necessary parts before starting operation and pre-running. (↓ oiling point)

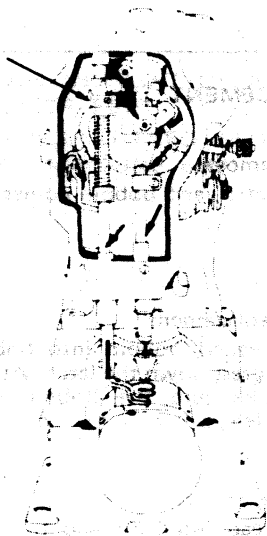

DARNING MACHINE

Fig. 1

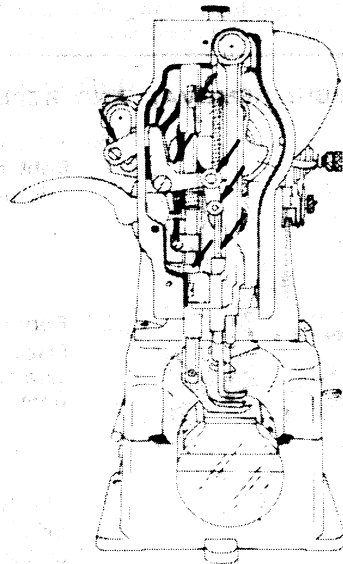


Fig. 2

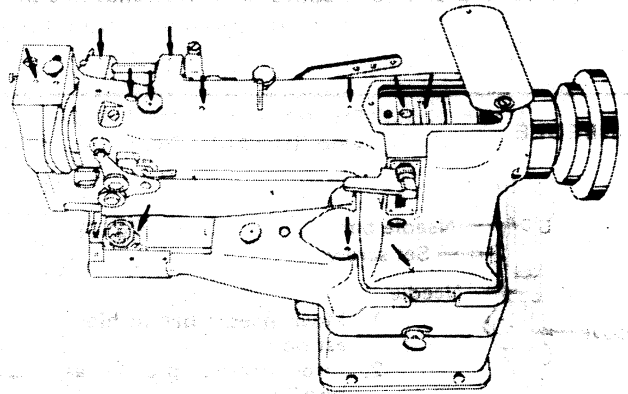


Fig. 3

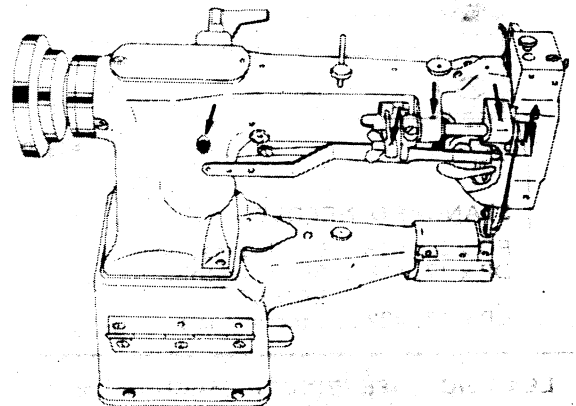


Fig. 4


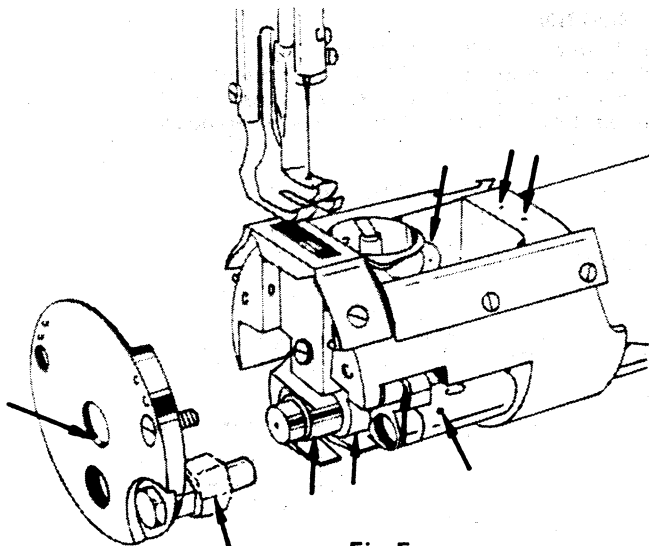


Fig. 5

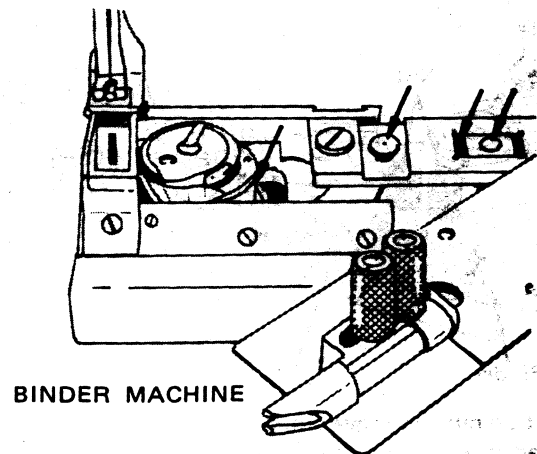

BINDER MACHINE

Fig. 6

LUBRICATION (with LUBRICATION SYSTEM MACHINE)

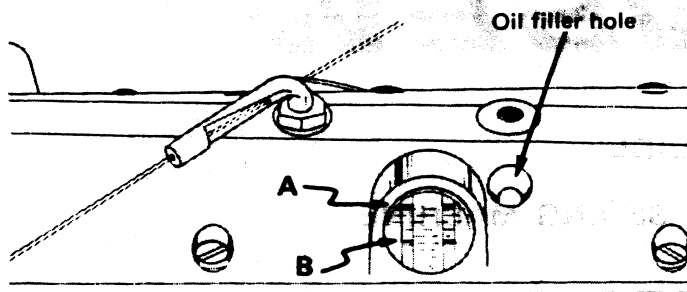


Fig. 7

To fill oil reservoir on top of machine until oil level reaches to upper reference line A.
Always keep oil level is above lower reference line B.

OILING ADJUSTMENT FOR UPPER PART (with LUBRICATION SYSTEM MACHINE)

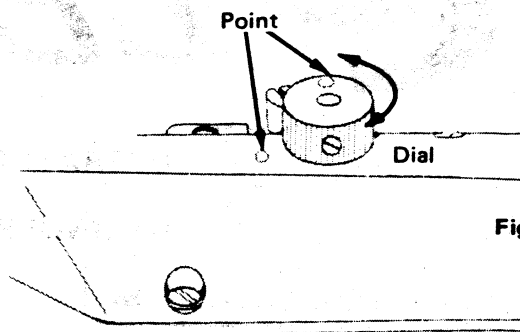


Fig. 8

While operating machine, lubrication to each spots of upper part of machine are made automatically. When the machine is in continuous operation, stop oiling for a while at your option. In that case, turn dial until two points fit together, then the dial comes down and lubrication is stopped.

NEEDLE

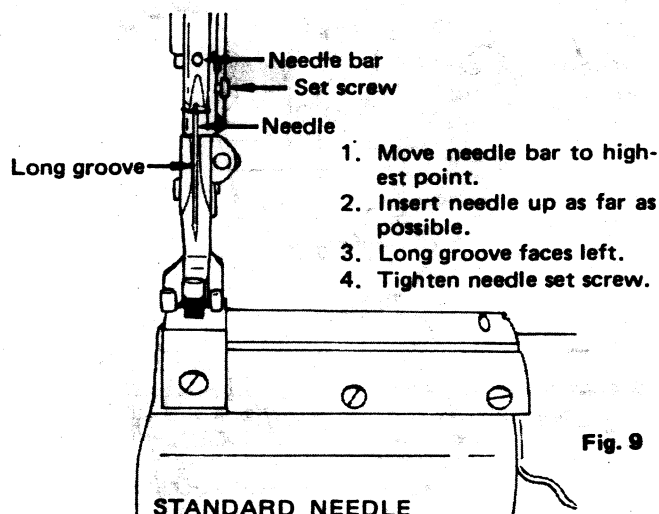


Fig. 9

STANDARD NEEDLE

FO x 3, #18Darning machine
DP x 17, #18Binder machine &
LCW-6F
DP x 17, #22Other models

BOBBIN REMOVAL AND REPLACEMENT

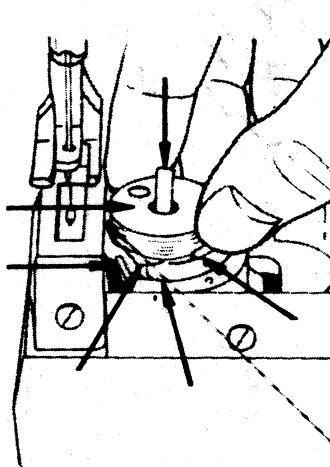


Fig. 10

1. Bobbin removal
Lift up latch, and bobbin comes up.

2. Bobbin replacement
Place threaded bobbin into bobbin case and press down the latch. At this time, make sure the bobbin goes round to left, pulling thread.

3. Threading bobbin
Lead thread into slot and pull the thread between bobbin case and opener, and pass thread inside of tension spring. Leave the end of thread about 5 cm from needle plate and close slide plate lightly.

LEADING TAPE (BINDER MACHINE only)

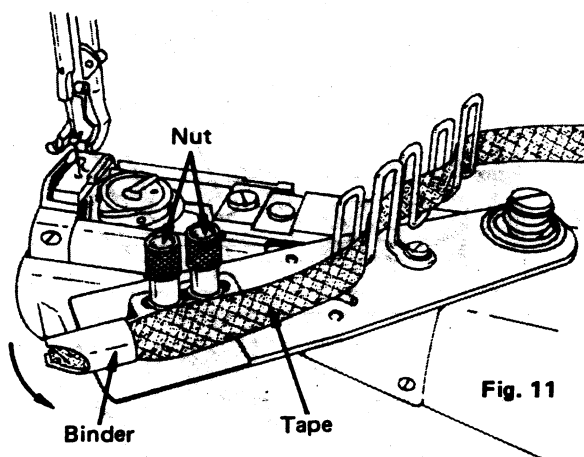


Fig. 11

1. Lift up nut and move binder toward you.
2. Lead tape as shown by Fig. 11.
3. Put the binder back to its former position.

WINDING BOBBIN

1. Place bobbin on spindle as far as it will go.
2. Lead thread as shown by Fig. 12 and wind several times on bobbin.
3. Press down lever for drive then start machine. Pulley will be disengaged from V-belt automatically after bobbin fills up with thread.

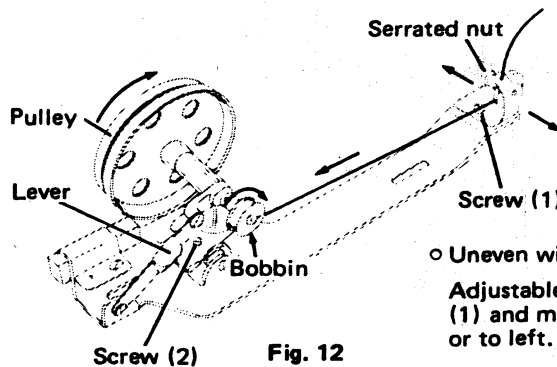


Fig. 12

○ Winding amount:
Adjustable by screw (2).

○ Uneven winding:
Adjustable by loosen screw (1) and move winder to right or to left.

○ Winding strength:
Adjustable by serrated nut.

THREADING NEEDLE

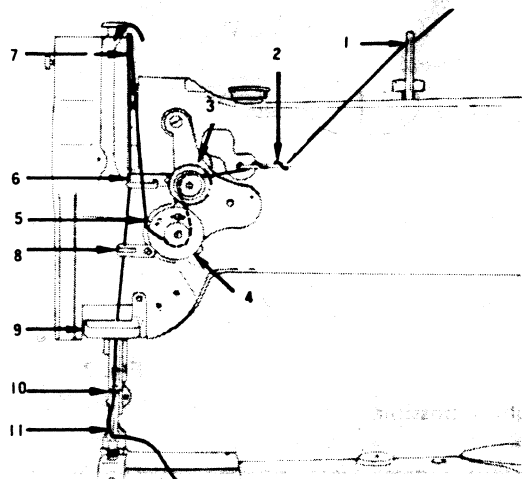


Fig. 13

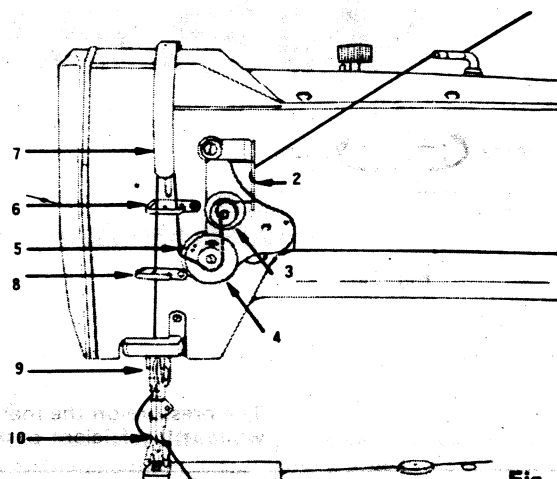


Fig. 14

- Raise needle bar to highest point and lead thread from thread stand the following numerical order (1 ~ 11).
- Thread needle from left to right.

ADJUSTING LIFT OF ALTERNATING PRESSER FEET (COMPOUND FEED WITH WALKING FOOT MACHINE only)

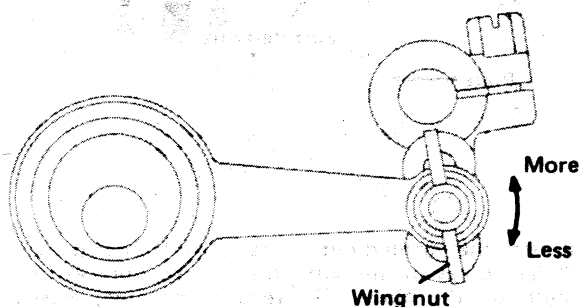


Fig. 15

To adjust, loosen wing nut and move link and stud assembly along slot.

ADJUSTING LIFT OF PRESSER FOOT (DARNING MACHINE only)


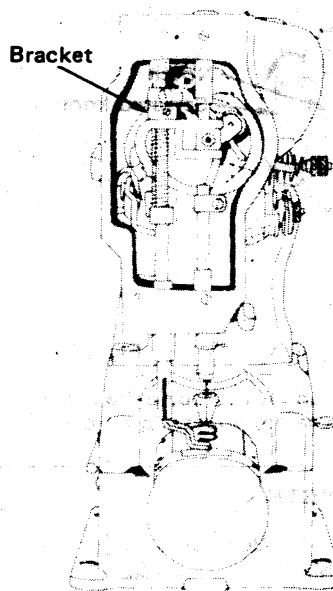


Fig. 16

To adjust, turn the bracket

THREAD TENSION

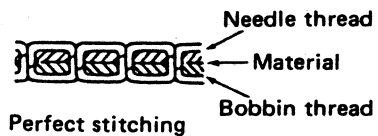

Tight tension of needle thread

Loose tension of needle thread

Fig. 17

NEEDLE THREAD

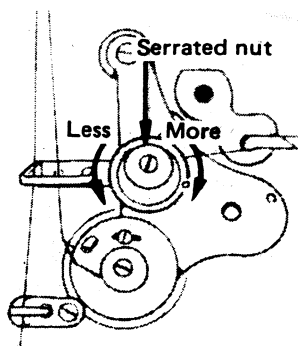


Fig. 18

To adjust, turn serrated nut

BOBBIN THREAD

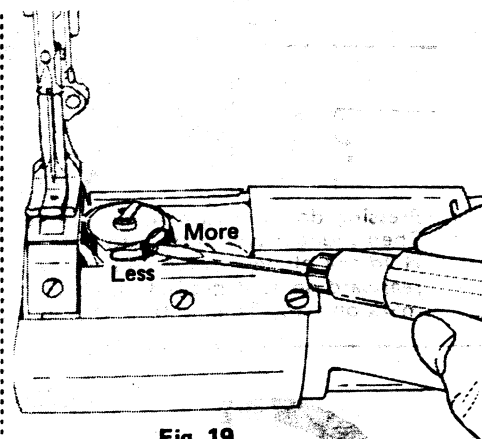


Fig. 19

To adjust, turn adjusting screw

(without LUBRICATION)

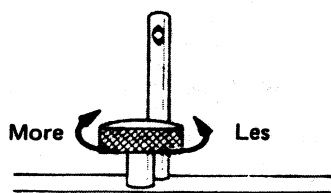


Fig. 20

(with LUBRICATION)

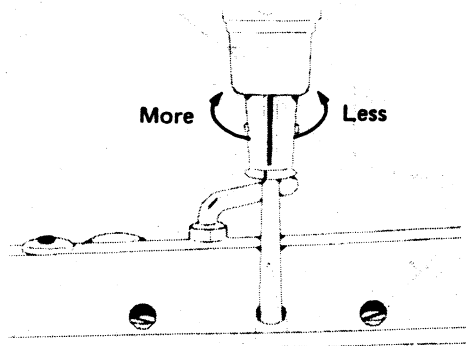


Fig. 21

The pressure on the material should be as light as possible, while still sufficient to insure correct feeding.

ADJUSTING STITCH LENGTH (without REVERSE MACHINE)

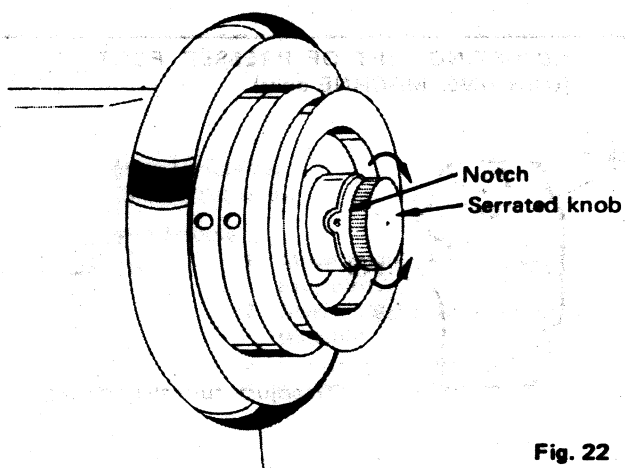


Fig. 22

To adjust, turn the serrated knob. It will be noticed that there is a notch in this hub wherein appears a number.

ADJUSTING STITCH LENGTH AND REVERSE STITCHING (with REVERSE MACHINE)

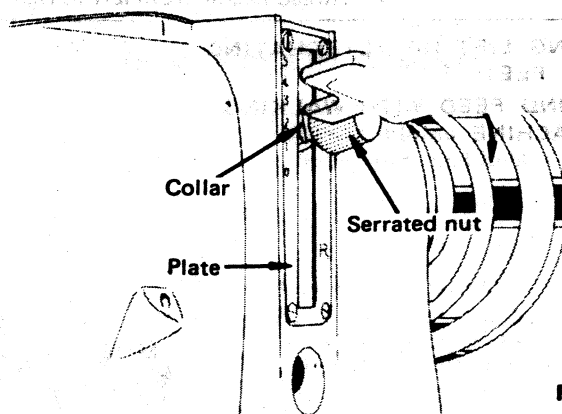


Fig. 23

To adjust, turn the serrated nut so that the reference mark on the collar comes in line with the desired number of stitch length on the plate. To reverse stitching, press down the lever as far as it will go.

ADJUSTING STITCH LENGTH

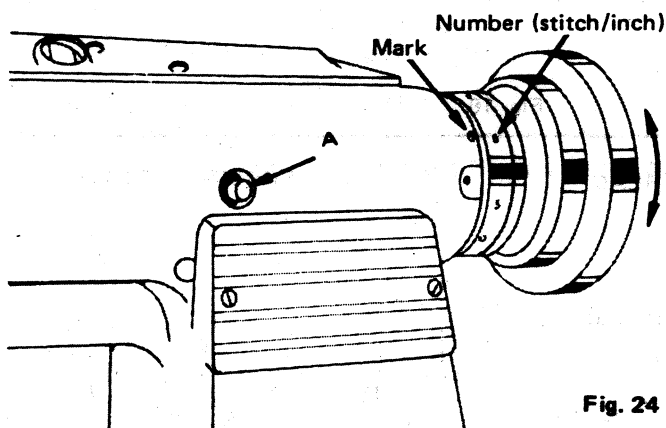


Fig. 24

Pressing down button A, turn pulley slowly toward you. Then plunger will enter into notch in feeding mechanism. Hold the plunger down and turn pulley either forward or rearward so that desired number on pulley may come at mark on arm. Then, release the plunger.

RE-ENGAGE SAFETY CLUTCH MECHANISM (except DARNING MACHINE)

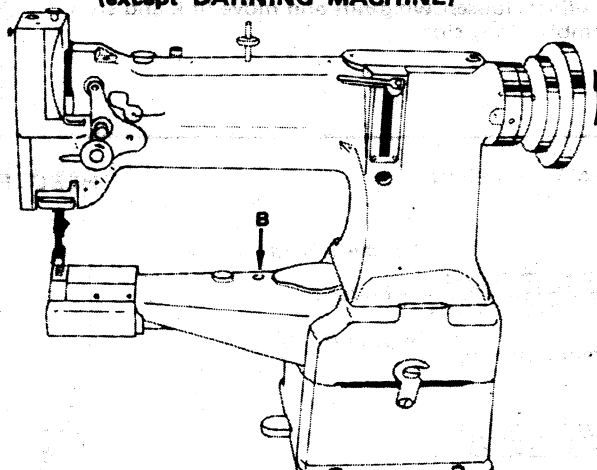


Fig. 25

1. Remove any foreign matter which may have lodged in hook. Do not use any sharp-edged tools.
2. Pressing button B and turn pulley rearward slowly to re-engage safety clutch.



CONSOLIDATED SEWING MACHINE CORP.

1115 Broadway, New York, N.Y. 10010 U.S.A.

OFFICE IN Los Angeles: 2401 South Broadway, Los Angeles, Calif., 90007 U.S.A.

Osaka, Japan: CONSEW INTERNATIONAL LIMITED

Yamajin Bldg., 18, 1-chome, Hon-machi, Higashi-ku, Osaka, Japan