

**Addendum No. 2 to IFB #26-46**



**CITY OF SOMERVILLE, MASSACHUSETTS  
Department of Procurement and Contracting Services**

To: All Parties on Record with the City of Somerville as Holding IFB #26-46  
Western Pearl Complete Streets

From: Jordan T. Remy

Date: 2/27/2026

Re: Additional Clarification

**Addendum No. 2 to IFB #26-46**

---

**Please acknowledge receipt of this Addendum by signing below and including this form in your proposal package. Failure to do so may subject the proposer to disqualification.**

**NAME OF COMPANY / INDIVIDUAL:** \_\_\_\_\_

**ADDRESS:** \_\_\_\_\_

**CITY/STATE/ZIP:** \_\_\_\_\_

**TELEPHONE/FAX/EMAIL:** \_\_\_\_\_

**SIGNATURE OF AUTHORIZED INDIVIDUAL:** \_\_\_\_\_

**ACKNOWLEDGEMENT OF ADDENDA:**

**Addendum #1** \_\_\_\_\_ **#2** \_\_\_\_\_ **#3** \_\_\_\_\_ **#4** \_\_\_\_\_

## **Addendum No. 2 to IFB #26-46**

An additional question was received regarding Items 701.2 and 701.5.

Item 701.5 will require all tactile panels to be unpainted and cast iron. Detectable warning panels quantified in Item 701.5 were measured using the assumption that each warning panel is 2'x5'. The specifications for Items 701.2 and 701.5 have been revised in the attached document, see pages 51 and 61.

**ITEM 701.1**

**CEMENT CONCRETE SIDEWALK AT DRIVEWAYS**

**SQUARE YARD**

This work shall consist of the construction of cement concrete driveway aprons and driveways in accordance with Section 701 of the Standard Specifications and in close conformity with the lines and grades shown on the plans or established by the Engineer and the following:

All joints shall be sawcut.

**Minimum thickness for item 701.1 shall be six inches. Windowpane/picture frame finishing shall not be allowed.**

Concrete Sidewalks at Driveways shall be constructed according to the MassDOT 2017 Construction Standard Details provided.

**ITEM 701.15**

**CEMENT CONCRETE SIDEWALK AT BEVELED AND CURVED CURB**

**SQUARE YARD**

This work shall consist of the construction of cement concrete sidewalk at beveled and curved curb in accordance with Section 701 of the Standard Specifications and in close conformity with the lines and grades shown on the plans or established by the Engineer and the following:

All joints shall be sawcut.

**Minimum thickness for item 701.15 shall be six inches. Windowpane/picture frame finishing shall not be allowed.**

Compensation shall be made at the contract unit price per square yard.

**ITEM 701.2**

**CEMENT CONCRETE PEDESTRIAN CURB RAMP**

**SQUARE YARD**


The work to be done under this item shall conform to the relevant provisions of Section 701 of the Standard Specifications for Cement Concrete Sidewalks, pedestrian curb ramps and driveways and the following:

Ramps shall be built to the latest specifications of the MassDOT Construction Standard Details and Standard Specifications. Ramps shall include the installation of Detectable Warning Panel in accordance with MassDOT Construction Standard Detail E 107.6.5. **All tactile panels shall be unpainted cast iron.**

All joints shall be sawcut.

**Minimum thickness for Item 701.2 shall be six inches. Windowpane/picture frame finishing shall not be allowed.**



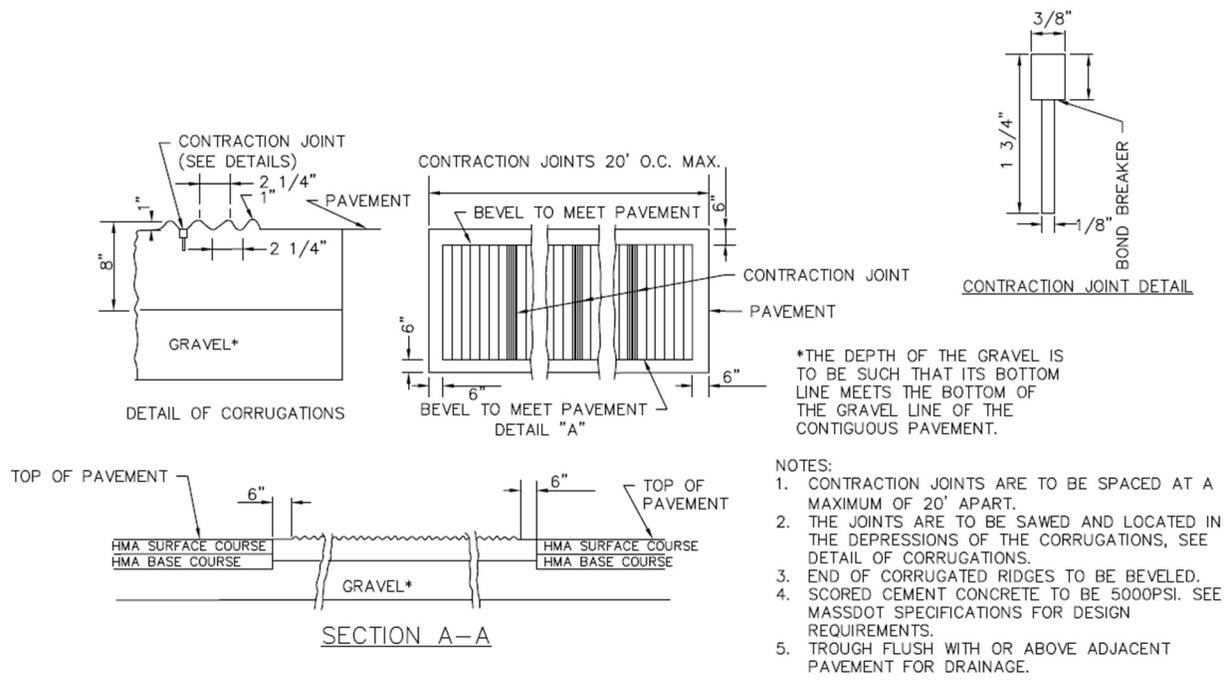

**ITEM 701.5**  
**DETECTABLE WARNING PANEL**

**EACH**

The work to be done under this item shall conform to the relevant provisions of Section 701 for pedestrian ramps and shall include placement of a surface mounted panel, meeting the dimensional requirements of MassDOT Standard Construction Detail E 107.6.5, on existing pavement or concrete. Detectable Warning Panels shall be unpainted cast iron and placed on existing curb ramps that are otherwise deemed ADA compliant, but with missing detectable warning panel or as directed by the City Engineer.



Measurement and Payment

Detectable Warning Panel will be measured and paid at the Contract unit price per each, complete in place, which price shall include all labor, materials, equipment and incidental costs required to complete the work.

**ITEM 701.6**  
**TRAPEZOIDAL DELINEATOR INDICATOR**

**LINEAR FEET**

The work to be done under this item shall conform to the relevant provisions of Section 701 for cement concrete sidewalks and shall include placement of a surface mounted panel on existing pavement or concrete.