


8360W DC BATTERY BACKUP CAPABLE CHAIN DRIVE WI-FI® GARAGE DOOR OPENER

Advanced security and reliable performance.

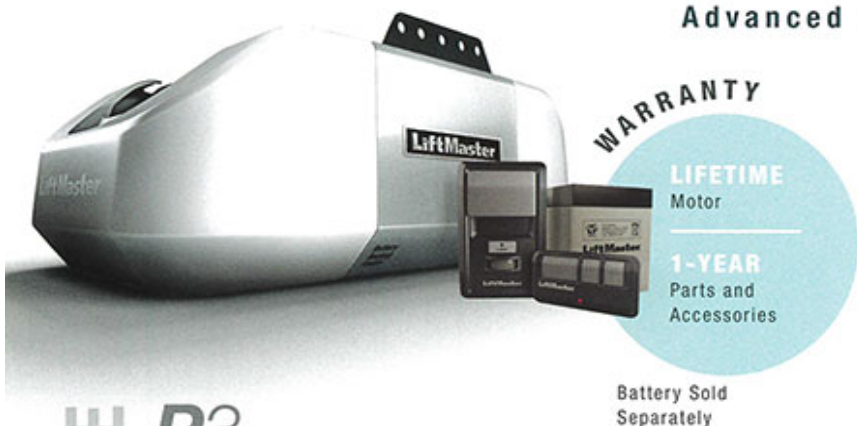

WARRANTY

LIFETIME
Motor

1-YEAR
Parts and
Accessories

Battery Sold
Separately

INCLUDED ACCESSORIES:

MOTION DETECTING CONTROL PANEL®

Activates the opener's
lights automatically.



886LMW

3-BUTTON REMOTE CONTROL

Operates up to 3 openers or
MyQ Light Accessories.



893LM

POWERFUL ADD-ONS:

BATTERY BACKUP

Powers up the opener when
the power's out.



485LM

REMOTE LIGHT CONTROL

Enables home lighting control
through a garage remote or a
smartphone.



825LM

GARAGE DOOR AND GATE MONITOR

Monitors and closes up to 4 garage
doors from any room in the house.



829LM

MINI UNIVERSAL REMOTE CONTROL

Compact and portable, to provide
quick, easy garage access.



374UT

WIRELESS KEYLESS ENTRY

Provides convenient, secure
access from outside the garage
with a 4-digit PIN.



877MAX

RELIABLE
SMART
SECURE

P3
MOTORS®

DC MOTOR IS PURPOSEFULLY DESIGNED AND BUILT TO LAST.

CHAIN DRIVE SYSTEM FOR STEADY PERFORMANCE AND
INDUSTRIAL STRENGTH.

BATTERY BACKUP CAPABILITY ENSURES ACCESS DURING
POWER OUTAGES (REQUIRES BATTERY BACKUP).

SOFT START/STOP FOR SMOOTH OPERATION.

myQ

FREE MyQ® MOBILE APP SO USERS KNOW THEIR HOME IS SECURE.

BUILT-IN WI-FI FOR THE EASIEST WAY TO CONNECT THE GARAGE.

REAL-TIME ALERTS INDICATE THE STATUS OF THE GARAGE DOOR
VIA EMAIL OR PUSH NOTIFICATIONS.

MONITOR AND CONTROL THE OPENER FROM ANYWHERE USING
MOBILE DEVICES.

Security+ 2.0®

SAFEGUARDS GARAGE ACCESS BY SENDING A NEW CODE WITH
EVERY CLICK.

POSILOCK® ELECTRONICALLY PROTECTS AGAINST FORCED OPENINGS.

ALERT-2-CLOSE SIGNALS WHEN A DOOR IS BEING CLOSED BY MyQ.

MOTION DETECTOR LIGHTS THE WAY AUTOMATICALLY.

THE PROTECTOR SYSTEM® INVISIBLE LIGHT BEAM AUTO-REVERSES
THE DOOR IF THERE IS AN OBSTRUCTION.

PRODUCT GUIDE 8360W

DC BATTERY BACKUP CAPABLE CHAIN
DRIVE WI-FI GARAGE DOOR OPENER

LiftMaster
PREMIUM SERIES

8360W

MASTERFUL ENGINEERING.

DC Battery Backup Capable Chain Drive Wi-Fi® Garage Door Opener

MOTOR

- 12VDC
- 53 RPM
- Automatic Thermal Protection

POWER

- 120VAC
- 60 Hz Voltage
- 2.7A Current Rating
- UL Listed
- 4' Power Cord (3-Prong)

MECHANICS

- Steel Chassis, T-Rail and Trolley
- Full Chain Drive Mechanism (63:1 Gear Reduction and Adjustable Door Arm)
- Auto-Force Adjustment for Changing Weather and Environmental Conditions
- Electronic Limits for Easy Setup
- DC Wi-Fi Logic Board with Built-In Surge Suppressor

7.5"



19"

10.5"

DIMENSIONS

Rail Options	7'	8'	10'
Installed Length	128"	140"	164"
Max. Opening	7'6"	8'6"	10'6"
Headroom Clearance Required: 2"			

8"

Per second for door to move upward

SPEED

6.5"

Per second for door to move downward

STANDARD SPECS.

SECURITY

SECURITY+ 2.0® RADIO CONTROLS

3-Button Remote Control (893LM)

Operating Range: ~200'

Operating Temperature: -30°F to 150°F Frequency:

- Remote Control: 310, 315 and 390 MHz Tri-Band
- Garage Door Opener: Frequency Agile on 310, 315 and 390 MHz
- Security+ 2.0 Rolling Code Technology

SECURITY+ 2.0

ENCRYPTED CONTROLS

- Motion Detecting Control Panel® (886LMW)
- Program Remote Controls
- Maintenance Alert System
- Easy Wi-Fi Setup

SMART

MyQ® RADIO



- Provides 2-way communication from garage door opener and MyQ Accessories.
- Enables monitoring and control of garage door openers and lighting controls via smartphone, tablet or computer.

HOMELINK® COMPATIBLE (VERSION 4.0 OR HIGHER*)

*May require an external adapter depending on the model and year of your vehicle. Visit HomeLink.com for additional information.

ELECTRICAL

LIGHTING



- Max. 2 100-Watt Lightbulbs
- Adjustable Time
- Enhanced CFL (Compact Fluorescent) Compatible, Max. 27 Watts
- Disabled in Battery Backup Mode

ENERGY

EFFICIENCY

- Approximately 1.5-Watt Power in Standby Mode*
- *Occurs at Down Limit When Opener's Lights Turn Off

SHIPPING.

SHIPPING WEIGHT (in lbs.)

18

HEAD

20

RAIL

4

BATTERY BACKUP (OPTIONAL)

CARTONS (3)

CARTON 1: 20" x 12" x 10"

- Motion Detecting Control Panel (886LMW)
- 3-Button Remote Control (893LM)
- Garage Door Opener Head (8360W)
- The Protector System® Safety Reversing Sensors

CARTON 2: 10'4" x 5" x 5"

- Assembled Solid-Steel Chain T-Rail

CARTON 3 (OPTIONAL): 5.31" x 4.63" x 5.13"

- Battery (485LM)

CONVENIENCE AND SAFETY.

- Alert-2-Close/Unattended Close Operation†
- Motion Detection Feature on Control Panel
- Emergency/Quick Release
- Automatic Trolley Reconnect
- Ventilation/Pet Opening
- Down Safety Reverse
- Safety Beam Obstruction Turns Lights On
- Maintenance Alert System
- Garage Door Opener Capacity of up to 24 Remote Controls, 2 Wireless Keyless Entry Systems and 16 MyQ Devices



©: 30K LTB Wi-Fi Hor LMG



*Note: To reduce the risk of injury to persons, only use Alert-2-Close/Unattended Close Operation features when installed with a sectional door.

LiftMaster
PREMIUM SERIES