



Prime Floors

Luxus series

SPC FLOORING 5mm Thick



Behold the
beauty of uncut

nature

wooden wonder



Scan Here

Prime Floors
Luxus series




*Impressive
luxury*

for your dream spaces



About

Prime Floor



Prime Floor truly dares to say no formaldehyde, owing to the properties which make it waterproof, wear-resistant and silent. It is a disruptive innovation in the flooring industry, which has perfectly synchronized designs in the whole world with beautiful visual effects. We assure that this perfect flooring option will be a popular choice in the flooring market. A versatile wood and stone range fascinates with its outstanding appearance and cutting edge designs! Not just smart looks, these floors are durable and highly resistant to wear and tear. It doesn't crack or form indentations with proper care and maintenance. The functionality of these luxury vinyl flooring is truly captivating and will surely get you floored with its superior features and in turn enhance your lifestyle!




Vital finesse captured in
*premium
surfaces*

About

SPC Flooring

SPC rigid core flooring combines the strength of stone and the beauty of wood; an all for one solution for your home decoration. SPC flooring is constructed by UV coating, Wear layer, SPC print layer, SPC core and Balanced layer. For the backing, EVA, IXPE foam or Cork wood are available as options. Its advantages include good dimensional stability, high peel strength, almost no noise when walking, no warping, no distortion, 100% waterproof, heat and sound insulation, eco-friendly rigid floor and zero harmful emissions.

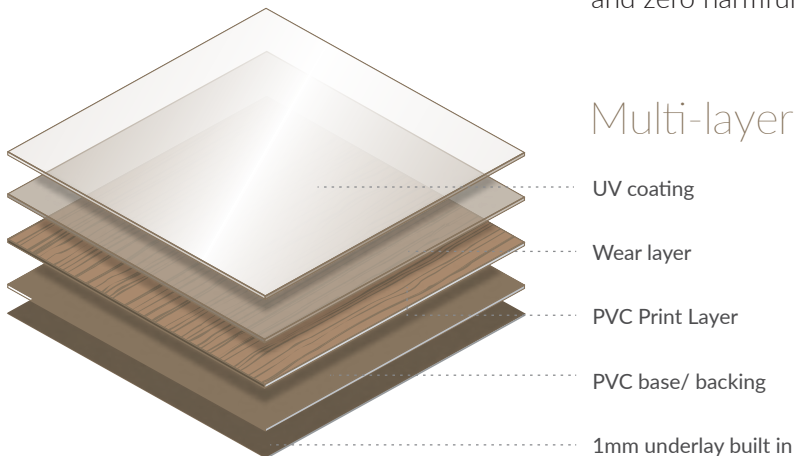



The unique features of SPC flooring are enumerated as under:

ECO-FRIENDLY

SPC flooring is mainly made with calcium powder, resin and a kind of stabilizer, which is 100% environmental protection floor without any hazardous substance, like heavy metal or formaldehyde. It is stone plastic composite, so it's formaldehyde free.



SPEED OF INSTALLATION

Adopting a quick locking system, with quick installation, save time and cost without glue. Tight and even interlock technology avoids crash of edges and water leakage; it's an ideal choice for places requiring high ensemble effect. Additional benefit is it installs about 40% faster than traditional glue.



WATERPROOF

SPC flooring contains vinyl resin, it has no appetency with water, and mildew will not occur due to high humidity. As it is water resistant, it is an ideal choice for residential use and can be used in bathrooms, kitchens, basement and laundry rooms.





ANTI-SKIDDING

The fine finish of Prime floors with anti-slipping, safe and sturdy layering makes it the most sought after material. Anti-skid vitrified tiles last longer than other ceramic tiles due to their thickness and high resistance to water and stains. Sturdy and durable, the appearance remains intact over a period of time!



STABILITY AND DURABILITY

The limestone core of SPC flooring has a higher density than the wood-like core of WPC flooring. This higher density is responsible for dimensional stability and protecting the floor from damage caused by temperature variations. This feature is also responsible for a greater resistance to scratches and indentations that could be caused by heavy furniture



VARIETY OF DESIGNS

With thousands of color patterns, wooden, stone & carpet design, it is suitable for different application areas.





PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE



Rio Rosewood | EX2075S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method





PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE




Brown Brisk | EX2069S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method



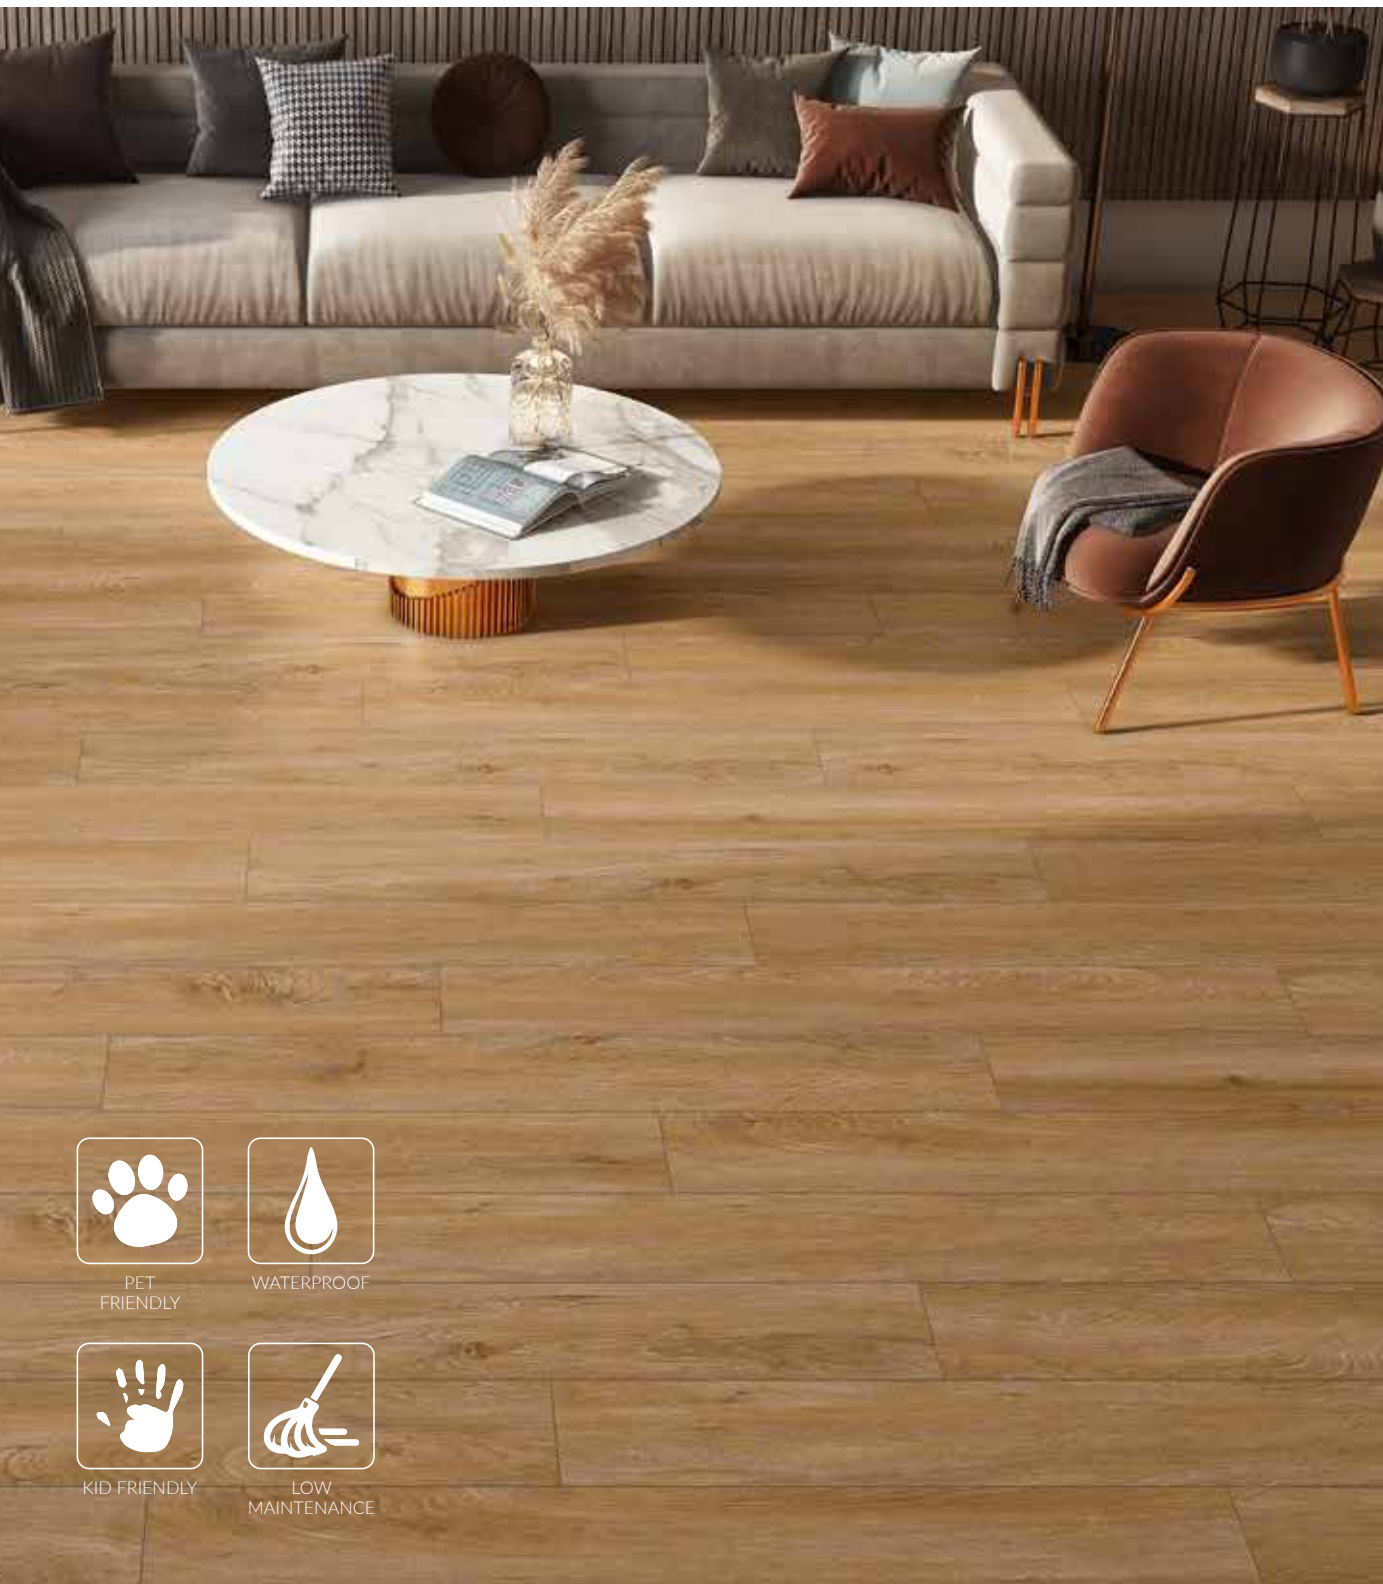

PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE



Natural Timber | EX2062S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method





PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE



Smoked Fern | EX2058S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method





PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE



Dark Natura | EX2052S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method



PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE




Grey Brish | EX2070S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method



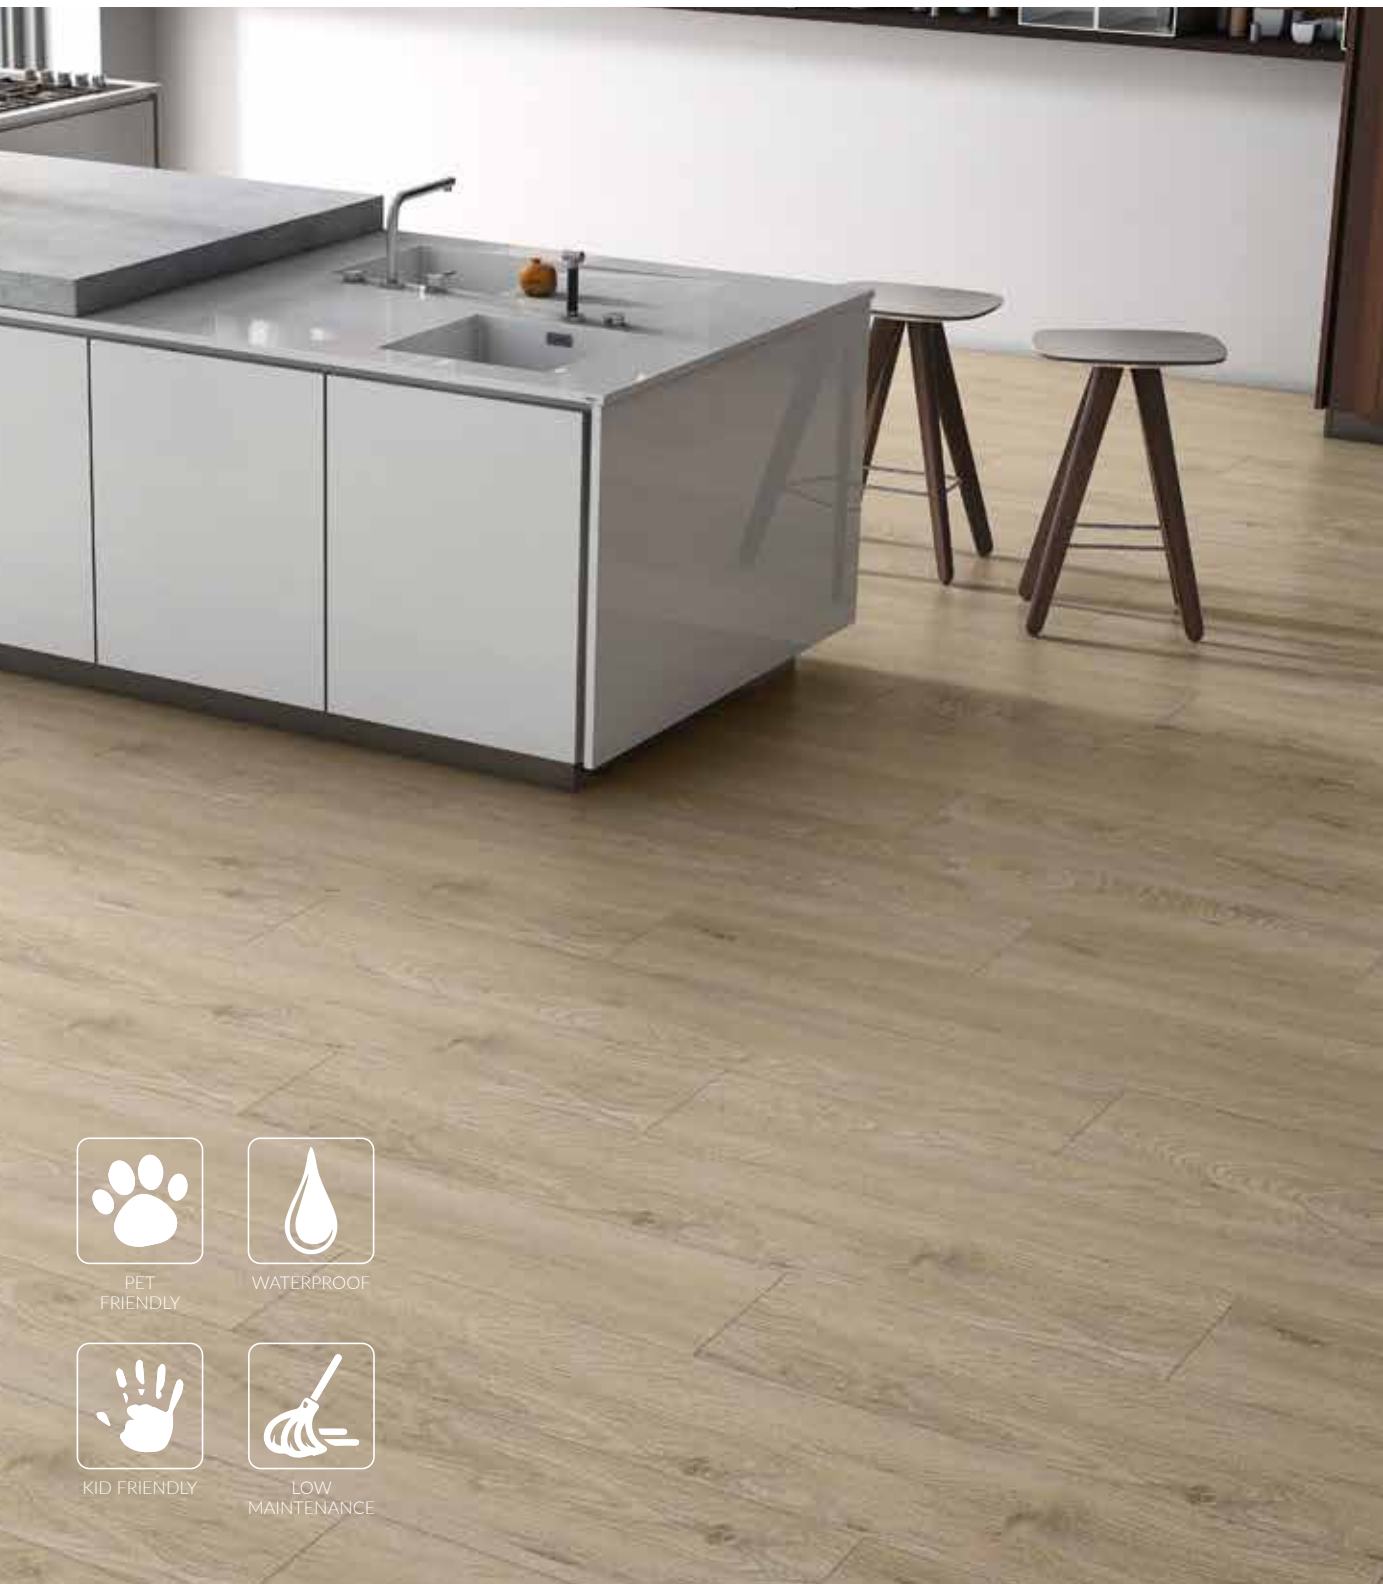

PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE



Acacia Timber | EX2064S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method





PET
FRIENDLY



WATERPROOF



KID FRIENDLY



LOW
MAINTENANCE



Almeria Ash | EX2054S

PRIME FLOOR PRODUCT DETAILS

Wear layer	0.3 mm
Finish	Classic wood
Plank Size	7.25" x 48"
Thickness	5 mm (Underlayment IXPE 1 mm)
Edge	Micro Bevel Edge
Construction	Heterogeneous
Installation	Uniclic Method



Technical Specifications

ITEM		UNIT	TEST METHODS	SPEC	PRIME FLOOR SPC
Thickness		mm	ASTM F 386	$\pm 0.005"$ (0.13mm)	$\pm 0.005"$ (0.13mm)
Size	Width	mm	ASTM F 2055	184.15 ± 0.23	184.15 ± 0.23
	Length	mm		1220 ± 1.58	1220 ± 1.58
Squareness		mm	ASTM F 2055	Max. 0.01"(0.254mm)	≤ 0.2
Gloss level		-	60° Gloss Meter		5 - 8
Size	Width	%	ASTM F 2199-09	$\leq 0.002"$ (0.165%)	$\leq 0.1\%$
	Length	%		$\leq 0.002"$ (0.165%)	$\leq 0.1\%$
Size	23°C	mm			$\leq 0.5\text{mm}$
	-10°C x 2hr	mm			$\leq 0.5\text{mm}$
Core Density		-			1.95 ± 0.05
Contraction (-10°C, 2hr)	Width	%	-10°C x 2hr		$\leq 0.2\%$
	Length	%			$\leq 0.2\%$
Expansion (50°C, 4hr)	Width	%	50°C x 4hr		$\leq 0.2\%$
	Length	%			$\leq 0.2\%$
Indentation		%	ASTM F 1914	$\leq 8\%$	$\leq 5\%$
Resistance to Chemicals			ASTM F 925 (Resistance to Chemicals)	No more than slight change in surface dulling, surface attack, or staining	No more than slight change in surface dulling, surface attack, or staining
IIC			ASTM F 492-09	≥ 50	≥ 52
Static Load Limit			ASTM F 970	0.005"(0.13mm)	0.005"(0.13mm)
Pieces/Box				10 pcs	10 pcs
Sq.Mt./Box				2.25	2.25
CLICK				UNICLIC	UNICLIC



Unique Features



Lower Thickness
& Weight



Extra Wide
Planks



Impact
Resistant



Easy to
Clean Floor



Green
Product



Dust free



Flame
Resistant



Scratch
Resistant



Termite
Resistant



Water Proof



Recyclable




Weather
Proof



Stain
Free



Easy to
Carry



Quick
Installation



Glue
Free

Product Application

INSTALLATION OF THE PRODUCT

1

Place the B plate on plate A inclined, right into the fillster locking, and then let it lay flat.



2

After laying it flat, place the B plate and C plate parallel to each other with spacing about 2-3 mm.



3

Lift up the plates A and B at the same time.
(Note: They should be at a 45 degree angle to the ground.)



4

Push the B plate flat along the C plate direction, push until locked.



5

With the palm of your hands, flatten the plates A and B, but do not use force to press to the floor.



6

The floors should be smooth without slit after installation. If the floor are not smooth or have a slit, then they need to be lifted and locked at a 10 to 30 degree angle. After locking, the floor will be smooth automatically.



Waterproof
core



Easy
to cut



Hard wearing
& durable



Foam
backed



Slip
resistant



Lighter
to carry



Stable rigid
PVC core



Reaction
to fire
tested




10 year
residential
/ 5 year
commercial
warranty

Explore Our Other Collections:




Luxury Vinyl Flooring

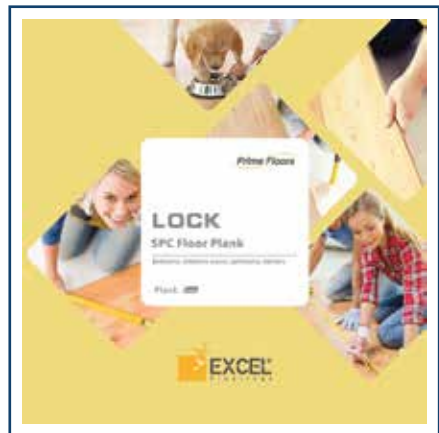

Wood Series SPC Flooring



Stone Series SPC Flooring

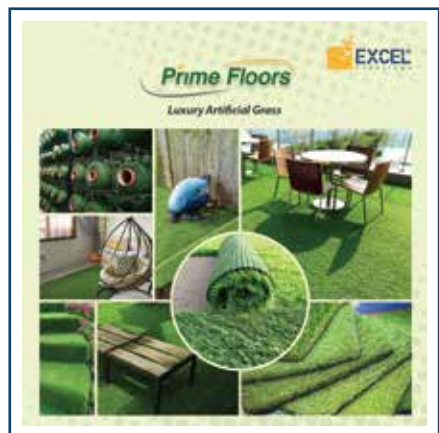

Artificial Grass



Prime Floors

Luxus series



www.excelwallpapers.com