

CHEVRON

8MM FISHBONE - AC4








About

Chevron Flooring

Welcome to the epitome of sophistication and style – Chevron Flooring by Excel Prime Floor. Unleash the timeless beauty of Chevron patterns that seamlessly blend classic charm with contemporary flair, creating a flooring masterpiece that transforms any space into a showcase of luxury.

When you choose Chevron Flooring by Excel Prime Floor, you're not just selecting a floor – you're making a statement. A statement of refined taste, timeless elegance, and a commitment to excellence. Experience the luxury of Chevron flooring and elevate your space to new heights.

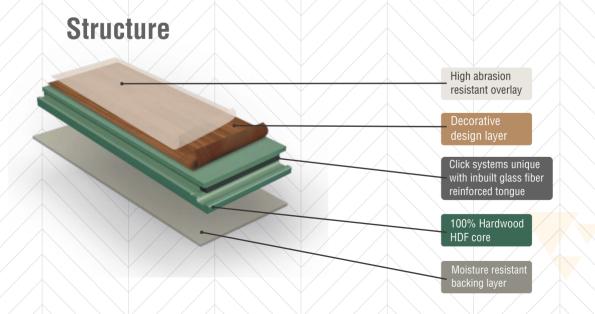





WHY CHEVRON FLOORING?



Scratch resistance



Anti-slip



Durability



Dimensional stability



Quick Installation



UV Protect



Europe Standard



Heavy residential use Level of use 23



Light commercial use Level of use 32

PRIME FLOOR ADVANTAGES



FLOORING IN LESS THAN A DAY



NO BREAKING OF EXISTING FLOOR REQUIRED




FIVE YEAR WARRANTY*



MADE IN INDIA





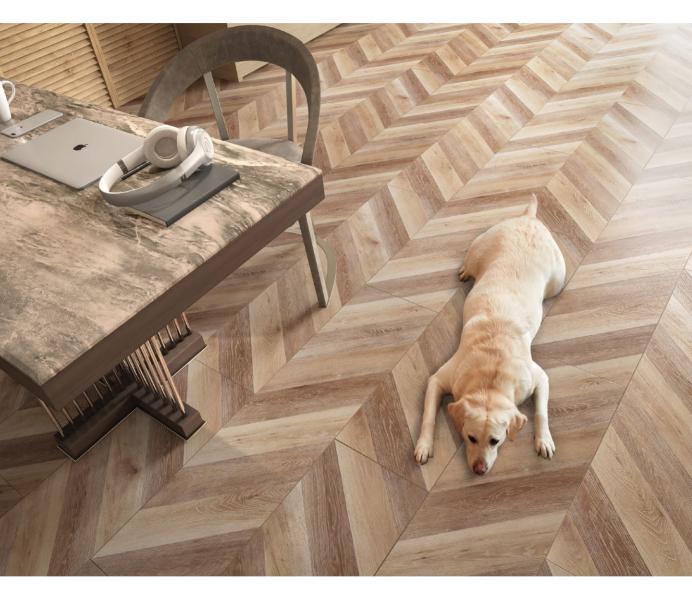

HIMALAYA BIRKIN | FB-5001

Abrasion	AC4
Plank Size	11.8"x 48"
Thickness	8 mm
Construction	Heterogeneous
Installation	Uniclic Method









RUSTIC OAK | FB-5002

Abrasion	AC4
Plank Size	11.8"x 48"
Thickness	8 mm
Construction	Heterogeneous
Installation	Uniclic Method









ZEBRA WOOD | FB-5003

Abrasion	AC4
Plank Size	11.8"x 48"
Thickness	8 mm
Construction	Heterogeneous
Installation	Uniclic Method









CANARY WOOD | FB-5004

Abrasion	AC4	
Plank Size	11.8"x 48"	
Thickness	8 mm	
Construction	Heterogeneous	
Installation	Uniclic Method	









KNOTTY ALDER | FB-5005

PRODUCT DETAILS

Installation

Abrasion	AC4
Plank Size	11.8"x 48"
Thickness	8 mm
Construction	Heterogeneous

Uniclic Method









ANTIQUE SAPELE | FB-5006

Abrasion	AC4
Plank Size	11.8"x 48"
Thickness	8 mm
Construction	Heterogeneous
Installation	Uniclic Method







TECHNICAL DATA

	Level of use 23 Heavy residential use	EN 13329	Bed room, living rooms, home offices, etc
	Level of use 32 Light commercial use	EN 13329	Offices, kids play room, changing room, low traffic areas, etc
	Abrasion resistance	EN 13329	AC4
	Impact resistance	EN 13329	IC2
B _{f1} -s1	Fire resistance	EN 13501-1	Bfl-s1
DS	Slipperiness	EN 14041	DS
7	Anti Static characteristics	EN 14041	Laboratory test is fulfilled
	Resistance to cigarette burns	EN 438-2	Slight change of the surface's grande 4
	Light fastness	EN ISO 105-B02 EN 20105-A02	Blue wool scale : ³ 6 Grey scale : ³ 4
	Static indentation	EN 433	No visible change
	Effect of a furniture leg	EN 424	No visible damage
	Castor chair resistance	EN 425:2002	No visible damage
E1 HCHO	Formaldehyde emission	DIN EN 14041	E1
	Thickness swelling	ISO24336	< =12%
	Surface soundness	EN 13329	> 1.00N/mm2
/ / / \		\ \ \ \ \ / / / /	

All the images are actual photoshoot images however, the color may vary due to screen resolution. Please check the actual catalogue before placing the order.













