


Function Description

1. Diagnose: Equipment support agreement:
 - OBDDII & EOBD
 - ISO 14230-4 (KWP2000)
 - ISO 15765-4 (CAN)
 - ISO 9141-2 (ISO)
 - ISO 14229 (UDS)
 - SAEJ1850 (VPW&PWM)
2. Lookup: Query DTC information
3. Setup: Set system language(English, French, Spanish, German, Russian, Italian, Portuguese). Unit of measure (metric&imperial)
4. Help: The help explains the relevant protocols supported by OBD devices, and explains several major modules of OBDDII (for example: power system data and freeze frame data modules, digital storage of DTCS type modules related to power train emissions, clear DTCS and freeze frame data modules, Oxygen sensor test module, non-continuous monitoring system test module, continuous monitoring system request DTCS module, special control mode requires control of the vehicle system module, read vehicle information module).

How To Use

1. Locate the vehicle's DLC (OBDDII) socket.

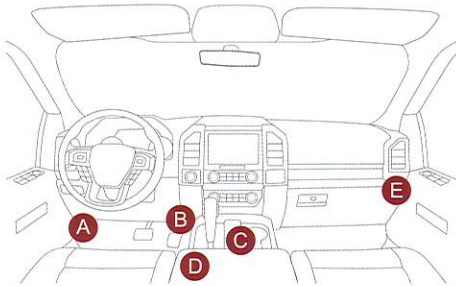


Note: Turn on the ignition of the vehicle, the voltage range of the device should be 9-18V, and the throttle should be in the closed position.

2. Select "Diagnose" and click "OK" to enter the system diagnosis.
3. Enter the "Monitor status" interface, select "DTC s in this ECU" and click "OK".
4. Enter the "Diagnostic Menu" interface, select "Read Code", and click "OK" (you can view Freeze Frame I/M Readiness, O2 Sensor Test, On-Board Monitor Test, EVAP Test =EVAP, Vehicle Information=VIN Others Data flow of the diagnostic module).
5. Enter the "select car Brand" interface to select the car model to be diagnosed.
6. View the fault status after diagnosis.
7. Return to the "Diagnostic menu" interface to select "Erase codes" to clear the fault cod.

Prerequisite conditions

1. The tool can be updated via a USB cable.
 - Note: Make sure that the computer has an Internet connection.
 - 1.1 Please go to <http://www.thinkcar.com> official website to find the "THINKOBD Updata TOOL" download tool "Product Updata Tool Setup.exe" to the computer. Unzip and install it on your computer (compatible with Windows XP, 7, 8, and 10).
 - 1.2 After the installation is complete, connect one end of the USB data cable to the USB port of the computer, Mini USB port on the other end of the tool.
 - 1.3 First insert the device into the computer identification port, then open the OBD100 upgrade tool, find the "COMFLG.INI" file to open, and change the "Serial Name" in the file to the computer and device port "USB-COM name" consistent
 - 1.4 Finally, open the "Creaderv Plus Upgrade Tool.exe" of the OBD100 installation package file, and click "start upgrade" to complete the upgrade.

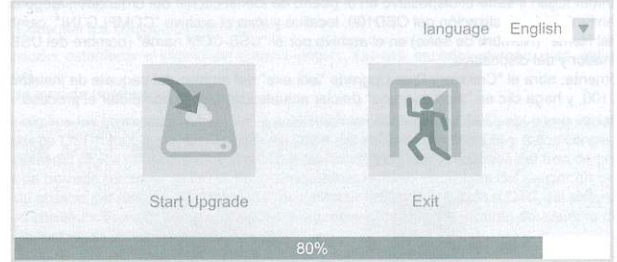

Warranty Card

1. For non-human quality problems, we accept return in one month without any reason. Within one year, free warranty.
 2. Before replacement, please ensure complete packaging; Before replacement/repair, please call the service number to get the shipping address.
 3. Product warranty starting date is based on the payment date.
- Service Line: 1-833-692-2766
 Customer Service Email: support@thinkcar.com
 Products tutorial, videos, FAQ and coverage list are available on Thinkcar official website.

[@thinkcar.official](https://www.facebook.com/thinkcar.official) [@ObdThinkcar](https://twitter.com/ObdThinkcar)

Note: This Quick Start Guide is subject to change without written notice.