



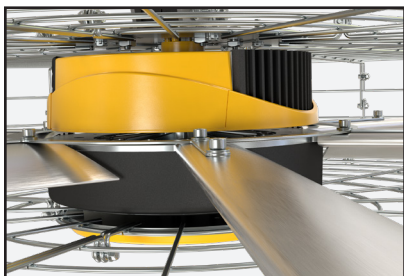

Pivot 2.0

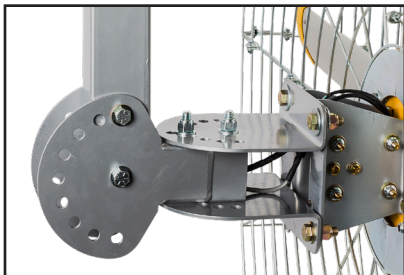

Eliminate stagnant air in every corner of your workplace with Pivot 2.0, the Big Ass Fan for hard-to-reach spaces. Mount it to a ceiling, beam or column and aim it anywhere you need a breeze. Thanks to Pivot 2.0's virtually infinite number of speeds and positions, you'll get precisely the air movement you want, where you want it — whether it's down an aisle or assembly line, around obstructions or in low-ceilinged spaces. And Pivot's direct-drive motor means you can count on it to always operate quietly and efficiently.

■ FEATURES AND BENEFITS

- 6-ft (1.8-m) diameter fits into low-clearance and tight spaces our larger overhead fans can't
- Patented airfoil and winglet design for maximum air movement
- Precision-molded hub for smooth operation and long life
- Durable steel cage and industrial-grade parts stand up to the toughest environments
- Pivoting joints allow easy head-angle adjustments for targeted cooling
- Variable speed wall controller mounts to standard single-gang junction box or directly to wall
- Entire fan is Intertek/ETL-certified to UL 507 and CSA C22.2 No. 113
- 3-year warranty on motor, controller, and parts; lifetime on hub and airfoils



USA
BIGASSFANS.COM
877-244-3267



CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1-300-244-277


SINGAPORE
BIGASSFANS.COM/SG
+65 6709 8500

Pivot 2.0


Technical Specifications

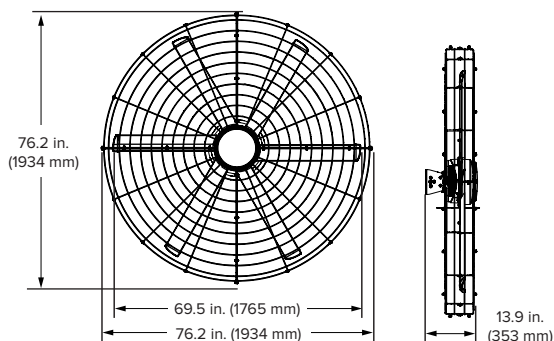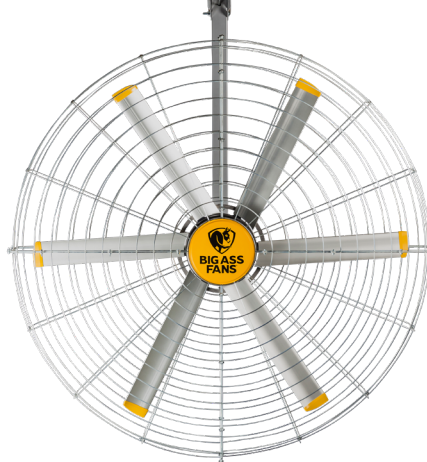

Fan Cage



Column Mount



Controller

SPECIFICATIONS

Construction and Warranty

Motor	Controller	Safety Features	Mounting	Warranty
Gearless direct drive	Variable speed controller mounts to single-gang junction box or to wall	Airfoil retainers, safety cables, and guy wires	Overhead bar joists and I-beams Vertical columns	3 years motor, controller, and parts Lifetime on hub and airfoils


Electrical and Performance

Model Number	Supply Power	Amperage	Max Speed	Max Power	Weight	Operating Temperature	Sound Level at Max Speed
F-PV2-0601	110–125 VAC, 1 Φ , 50/60 Hz, 10 A	7.8–7.1 A	300 RPM	460 W	114 lb (51.7 kg)	-4°F to 131°F (-20°C to 55°C)	63.5 dBA
F-PV2-0602	200–240 VAC, 1 Φ , 50/60 Hz, 10 A	5.6–4.6 A					

480 V stepdown transformer available.
Specifications subject to change without notice.
Fans are sound tested at maximum speed in a laboratory environment. Actual results in field conditions may vary due to sound reflecting surfaces and environmental conditions.

AIRFLOW VELOCITY

Measured in feet per minute (meters per minute).

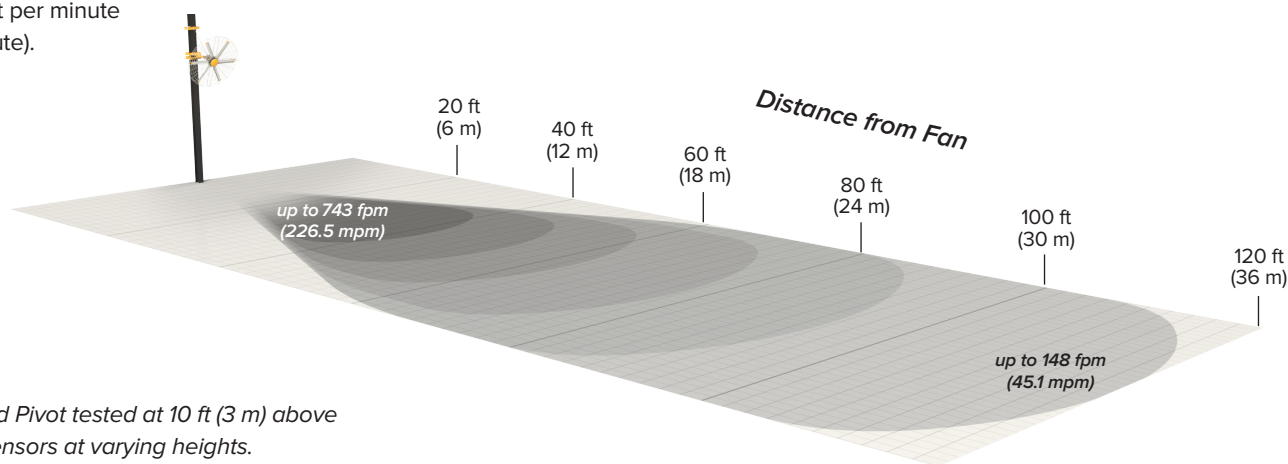

Column-mounted Pivot tested at 10 ft (3 m) above floor with four sensors at varying heights.



USA
BIGASSFANS.COM
877-244-3267

CANADA
BIGASSFANS.COM
844-924-4277

AUSTRALIA
BIGASSFANS.COM/AU
1-300-244-277

SINGAPORE
BIGASSFANS.COM/SG
+65 6709 8500