


Pallet Exchanger PX-Standard

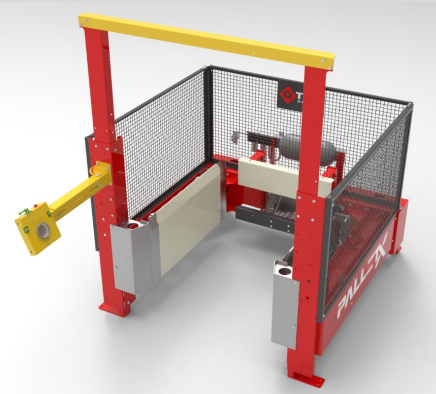

Pallet Exchanger PX-NF

QTEK Pallet Exchangers transfer full loads *-in a low level operation-* with no need to invert and no need to push your loads.

QTEK PX and PX-NF models can hold hard, soft, flexible and delicate products with zero product damage.

**No Pushing, No Inverting = No Damage**



**> 50 % reduction in load transfer time.**



**100 % reduction in product damage.**



**Strong ROI of < 12 months.**

## Key Features:

- PX: Standard: AC Power: 110VAC @ 15 Amp
- PX-NF: Zero AC Power: 80 PSI Compressed air only.
- Installation and set to run in Two (02) hours
- Operators trained in One (01) hour
- Low maintenance.
- Operator Friendly
- Dual adjustable clamp pressures to accommodate a wide range of products.
- Minimal 7'D x 7'W floor space
- Up to 3,500 Lbs. loads
- PX Standard: Four 10"-20" rubber clamps
- PX-NF: Three rubber clamps.
- PX Standard: Optional Blades for complex loads.



**1-877-453-1880**



Concepts	PX-Standard	PX-NF
AC Power	110/240 V AC 15Amps	110/240 V AC 15Amps
Compressed Air	60 psi	60 psi
Footprint	42"-50"	42"-50"
Front Clamps	1 x 10" H X 42" L	No clamp
Rear Clamps	1 x 10" H X 42" L	1 x 4" H x 36" L
Side Clamps	2 x 10" H X 42" L	2 x 20" H X 50" L
Dual Pressure	Yes	Yes
Set of Cameras	01 Set of Cameras	01 Set of Cameras
Colour HDTV Monitors	02 Colour HDTV Monitors	02 Colour HDTV Monitors
Operator Arm	01 Operator Arm	01 Operator Arm
Push Button Station	01 Push Button Station	01 Push Button Station
Temp: Working area	32°F / 0°C	32°F / 0°C
Blades	10" Blades	No

[www.QTEKdesign.com](http://www.QTEKdesign.com)