



**VERTICAL CROSS SECTION**

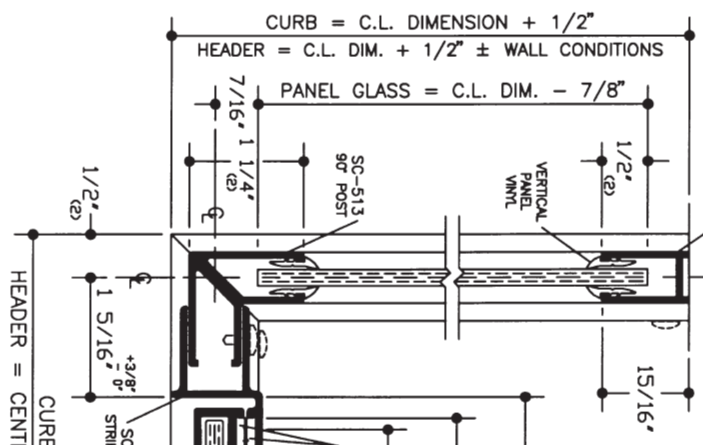

**HORIZONTAL CROSS SECTION**

**STRIKE JAMB DETAIL ABOVE & BELOW MAGNET**



**FRAMELESS DOOR PANEL**

- NOTES:**
1. Glass bite and overlap of vertical members may be altered to facilitate use of standard glass sizes or for out-of-plumb wall conditions.
  - \* 2. KD door components machined for a maximum glass size of 29 5/8" x 63 1/2". Smaller sizes may be substituted.
  3. The SCV-332 strike jamb magnet (8" long) should be centered in the jamb with SCV-332 jamb seal vinyl above and below it (see detail).
  4. If 1/4" thick door glass is used in place of the standard 3/16" thickness, then substitute SCV-308 vinyl in place of the SCV-257 glazing vinyl.
  5. Centerline dimension refers to the measurements taken at the center of the shower curb.

PANEL GLAZING VINYL		
GLASS THICKNESS	VERTICAL	HORIZONTAL
1/4"	SCV-219	SCV-220
3/16"	SCV-226	SCV-225

**1/2" SIZE DETAIL**

SERIES	UNIT	WIDTH x HEIGHT	DOOR GLASS SIZE	PANEL GLASS SIZE
<b>146/746</b>	146	36" x 48" x 68 5/8"	Width As Determined * Height = 63 1/2"	Width As Determined * Height = 67 1/2"
FRAMELESS THINLINE	746	36" x 48" x 68 5/8"	Height = 63 1/2"	Height = 67 1/2"

NOTE: Glazing material for all KD units and Gazed units must conform to Ansi Z97.1 and CPSC Standard 16 CFR 1201 Category I and II.

**BASCO**  
SHOWER ENCLOSURES  
7201 Snider Road ■ Mason, Ohio 45040  
Phone (513) 573-1900