



HVAC REGISTERS | GRILLES | LOUVERS
FLEX | PIPE | FITTINGS & MORE



PRODUCT CATALOG



Scan to visit our website

JEDCO Supply
1105 Satellite Blvd.
Suite 300
Suwanee, GA 30024

Hours of Operation
Monday - Friday
7:30 am - 5:00 pm

678-608-2858
Fax: 678-608-0781

sales@jedcosupply.com
jedcosupply.com

VENDORS



ADDITIONAL PRODUCTS

- Air Curtains
- Mini Splits / PTACs
- Flex
- Gas Heaters
- Silencers / Attenuation
- ERV's
- Wood Registers
- Cast Iron Grilles
- Kitchen Hoods
- Stainless Steel Duct
- Grease Duct
- Variable Volume Diffusers
- Security Grilles
- Security Bars
- Fabric Air Duct Systems
- Remote Powered Balance Dampers
- Condensate Pumps
- Float Switches
- Gripple Cable
- Roof Curbs & Equipment Supports

LOCAL PRODUCTS*

- Spiral Pipe
- Spiral Pipe Fittings
- Snaplock Pipe
- Snaplock Pipe Fittings
- Unistrut
- Threaded Rod
- PVC Pipe
- PVC Fittings

*** PICKUP & DELIVERY IN METRO ATLANTA ONLY**

**FOR ANY SPECIAL SIZES OR ANY QUESTIONS REGARDING ANY
PRODUCTS IN OUR CATALOG, CALL US AT 678-608-2858**



REGISTERS/GRILLES

| | |
|------------------------|-----|
| Supply Registers | 4 |
| Return Grilles | 32 |
| Filter Grilles | 46 |
| Spiral Mounted | 52 |
| Slot Diffusers/Plenums | 58 |
| Floor Vents | 64 |
| Wood Grilles | 76 |
| Baseboard Diffusers | 80 |
| T-Bar Lay-ins | 84 |
| Accessories | 110 |

LOUVERS/DAMPERS

| | |
|------------------------|-----|
| Fire Dampers | 112 |
| Radiation Dampers | 120 |
| Control/Volume Dampers | 124 |
| Backdraft Dampers | 132 |
| Exterior Louvers | 134 |
| Roof/Wall Caps | 140 |

ACCESS DOORS

| | |
|-------------|-----|
| Universal | 148 |
| Drywall | 150 |
| Fire Rated | 152 |
| Plastic | 156 |
| Sheet Metal | 158 |
| Round | 162 |





FANS

| | |
|--------------------|-----|
| Cabinet Fans | 164 |
| Dryer Booster Fans | 168 |
| Inline Fans | 176 |
| Radon Fans | 178 |

INDOOR AIR QUALITY

| | |
|------------------|-----|
| Pleated Filters | 184 |
| Washable Filters | 190 |
| Air Purification | 192 |
| UV Lights | 194 |
| Dehumidifiers | 196 |
| HEPA Filtration | 198 |

TERMINAL UNITS/HEAT

| | |
|-----------------------|-----|
| RVE | 200 |
| RA-500 | 202 |
| LMHS | 204 |
| QFV | 206 |
| Electric Unit Heaters | 208 |



101MW / 101MDW

One-Way Register



GRILLES | SUPPLY

101MW / 101MDW



101MW



101MDW

MODEL

101MW One-Way Register

101MDW One-Way Horizontal Register

FEATURES

- Steel construction
- 1/2" blade spacing
- Multi-shutter damper
- For sidewall / ceiling applications
- Vertical blades (101MW)
- Horizontal blades (101MDW)
- Residential



WEB SEARCH: 101MW / 101MDW

101MW

Width

Height

| | 8" | 10" | 12" | 14" | 16" | 18" |
|-----|----|-----|-----|-----|-----|-----|
| 4" | X | X | X | X | | |
| 6" | X | X | X | X | X | |
| 8" | | | X | X | | |
| 10" | | | | | | |
| 12" | | | X | | | |
| 18" | | | | | | X |


101MDW

Width


Height

| | 6" | 8" | 10" | 12" | 14" | 16" |
|----|----|----|-----|-----|-----|-----|
| 4" | X | X | X | | | |
| 6" | | X | X | X | X | X |
| 8" | | | X | X | X | X |

101MW

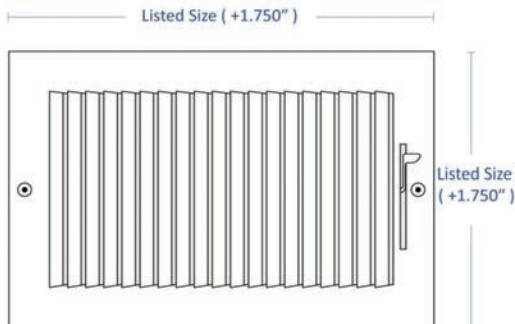

101MDW

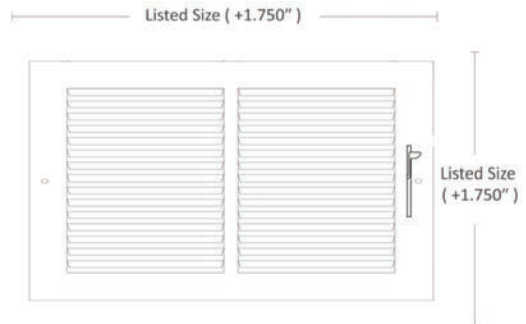

102MW

Two-Way Register



GRILLES | SUPPLY

102MW



102MW

MODEL

102MW Two-Way Register

FEATURES

- Steel construction
- 1/2" blade spacing
- Multi-shutter damper
- For sidewall / ceiling applications
- Residential


SPECIAL ORDER OPTIONS

- Opposed blade damper



WEB SEARCH: 102MW

| 102MW | | Width | | | | | | | | | |
|--------|-----|-------|----|-----|-----|-----|-----|-----|-----|-----|-----|
| Height | | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" | 24" | 30" |
| | 4" | X | X | X | X | X | X | X | X | X | |
| | 5" | | | X | X | X | | | | | |
| | 6" | X | X | X | X | X | X | X | X | X | X |
| | 8" | | X | X | X | X | X | X | X | X | |
| | 10" | | | X | X | X | X | X | X | X | |
| | 12" | | | | X | X | X | X | X | X | |
| | 14" | | | | | X | | | | X | |
| | 18" | | | | | | | X | X | | |

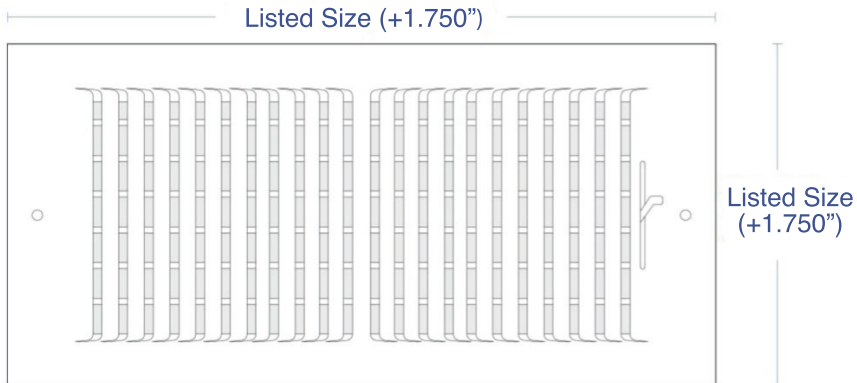

103MW

Three-Way Register



GRILLES | SUPPLY

103MW



103MW

MODEL

103MW Three-Way Register

FEATURES

- Steel construction
- 1/2" blade spacing
- Multi-shutter damper
- For sidewall / ceiling applications
- Residential

SPECIAL ORDER OPTIONS

- Opposed blade damper




WEB SEARCH: 103MW

103MW

Width

Height

| | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" | 24" |
|-----|----|----|-----|-----|-----|-----|-----|-----|-----|
| 4" | X | X | X | X | X | | | X | |
| 6" | X | X | X | X | X | X | X | X | X |
| 8" | | X | X | X | X | X | X | X | X |
| 10" | | | X | X | X | X | X | | |
| 12" | | | | X | X | | X | | |
| 14" | | | | | X | | | | |

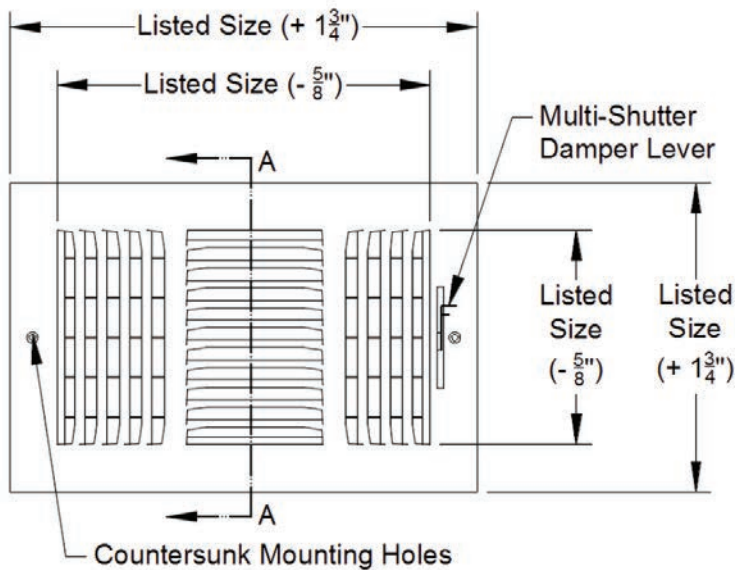

104MW

Four-Way Register



GRILLES | SUPPLY

104MW



104MW

MODEL

104MW Four-Way Register

FEATURES

- Steel construction
- 1/2" blade spacing
- Multi-shutter damper
- For sidewall / ceiling applications
- Residential


SPECIAL ORDER OPTIONS

- Opposed blade damper



WEB SEARCH: 104MW

| 104MW | | Width | | | | | | | |
|--------|-----|-------|----|-----|-----|-----|-----|-----|-----|
| Height | | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" |
| | 6" | X | | X | | | | | |
| | 8" | | X | X | | | | | |
| | 10" | | | X | | X | | | |
| | 12" | | | | X | | | | |
| | 14" | | | | | X | | | |
| | 16" | | | | | | X | | |
| | 18" | | | | | | | X | |
| | 20" | | | | | | | | X |

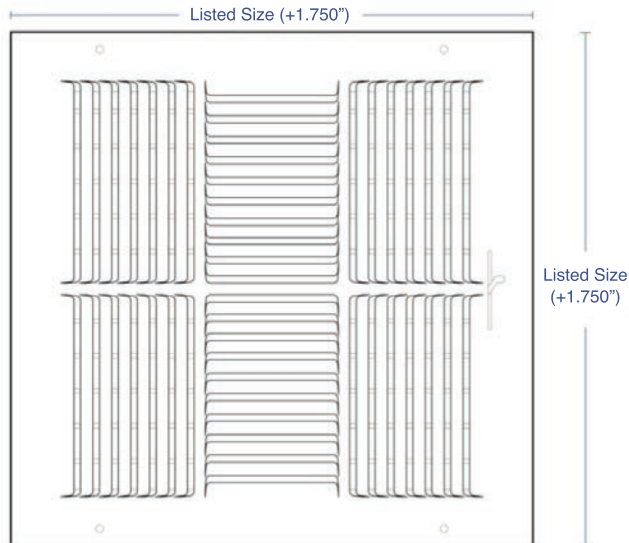


RZ602 / RZ603 / RZ604

Plastic Supply Registers



GRILLES | SUPPLY

RZ602 / RZ603 / RZ604



RZ602



RZ603



RZ604

MODEL

RZ602 2-Way Plastic Supply Register

RZ603 3-Way Plastic Supply Register

RZ604 4-Way Plastic Supply Register

FEATURES

- Plastic construction
- 1/2" blade spacing
- Multi-shutter damper
- For sidewall / ceiling applications
- Residential

| RZ602 | | Width | | | |
|--------|----|-------|-----|-----|---|
| Height | 8" | 10" | 12" | 14" | |
| | 4" | X | X | | |
| | 6" | | X | X | X |
| | 8" | | X | | |

| RZ603 | | Width | | | |
|--------|----|-------|-----|-----|---|
| Height | 8" | 10" | 12" | 14" | |
| | 4" | X | | | |
| | 6" | | X | X | X |
| | 8" | | X | X | X |

| RZ604 | | Width | | | |
|--------|-----|-------|-----|-----|---|
| Height | 6" | 8" | 10" | 12" | |
| | 6" | X | | | |
| | 8" | | X | | |
| | 10" | | | X | |
| 12" | | | | | X |



WEB SEARCH: RZ602 / RZ603 / RZ604



RZ150 SERIES


Round Plastic Ceiling Diffuser

MODEL

RZ150 Round Plastic Ceiling Diffuser

FEATURES

- Round plastic ceiling diffuser
- 12x12 / plastic construction
- Universal collar on back allows you to hook up to 6", 7", or 8" duct
- Installs without screws using ratcheting cam lock
- Removable core and integral damper
- White finish

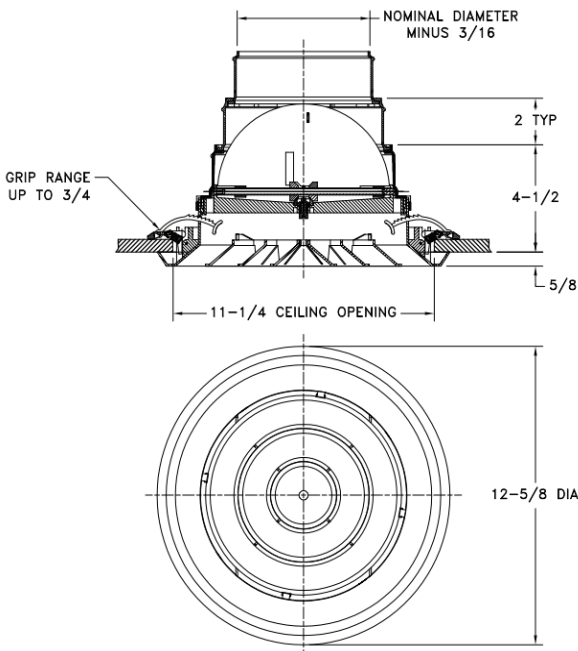

RZ150

GRILLES | SUPPLY

RZ150

WEB SEARCH: RZ150



V4002MW / V4002MAL

Aluminum Single Deflection Registers



GRILLES | SUPPLY

V4002MW / V4002MAL



V4002MW



V4002MAL

MODEL


V4002MW White Single Deflection Register
V4002MAL Aluminum Single Deflection Register

FEATURES

- Aluminum construction
- Individually adjustable blades
- Multi-shutter damper

SPECIAL ORDER OPTIONS

- Horizontal front blades
- With OBD option
- Grille only
- Heavy duty option
- Custom sizes available

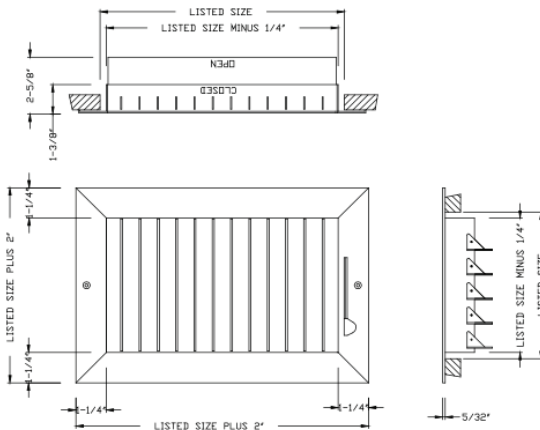

WEB SEARCH: V4002MW / V4002MAL



V4002MW / V40042MAL

Aluminum Single Deflection Registers

| V4002MW | | Width | | | | | | | | | | | | | | |
|---------|-----|-------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Height | | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" | 22" | 24" | 26" | 28" | 30" | 32" | 36" |
| | 3" | | | X | X | X | X | | | | X | | | | | |
| | 4" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 5" | X | X | X | X | X | X | X | X | | X | X | | X | | |
| | 6" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 8" | | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 10" | | | X | X | X | X | X | X | X | X | X | X | X | | X |
| | 12" | | | | X | X | X | X | X | X | X | X | X | X | | X |
| | 14" | | | | | X | X | X | X | X | X | X | X | X | | X |
| | 16" | | | | | | X | X | X | X | X | X | | X | | X |
| | 18" | | | | | | | X | X | | X | | | X | | |
| | 20" | | | | | | | | X | | X | | | X | | |
| | 22" | | | | | | | | | X | | | | | | |
| | 24" | | | | | | | | | | X | | | | | |

| V4002MAL | | Width | | | | | | | | | | | | | | |
|----------|-----|-------|----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Height | | 6" | 8" | 10" | 12" | 14" | 16" | 18" | 20" | 22" | 24" | 26" | 28" | 30" | 32" | 36" |
| | 3" | | | X | X | X | X | | | | X | | | | | |
| | 4" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 5" | X | X | X | X | X | X | X | X | | X | X | | X | | |
| | 6" | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 8" | | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 10" | | | X | X | X | X | X | X | X | X | X | X | X | | X |
| | 12" | | | | X | X | X | X | X | X | X | X | X | X | | X |
| | 14" | | | | | X | X | X | X | X | X | X | X | X | | X |
| | 16" | | | | | | X | X | X | X | X | X | | X | | X |
| | 18" | | | | | | | X | X | | X | | | X | | |
| | 20" | | | | | | | | X | | X | | | X | | |
| | 22" | | | | | | | | | X | | | | | | |
| | 24" | | | | | | | | | | X | | | | | |

Aluminum Double Deflection Registers



V4004W / V4004DW



WEB SEARCH: V4004W / V4004DW

V4004W White Double Deflection Register
V4004DW White Double Deflection Register
w/ OBD

- Aluminum construction
- Vertical front blades/horizontal rear blades
- Individually adjustable blades
- OBD option available (V4004DW)
- White finish

- Horizontal front blades
- Heavy duty option
- Custom sizes available





V4004W / V4004DW

Aluminum Double Deflection Registers

| V4004W | | Width | | | | | | | | | | | | | | | | | | | |
|--------|----|-------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Height | | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 48 |
| | 4 | X | X | X | X | X | X | X | X | X | X | X | | X | X | | | X | X | | X |
| | 5 | | | | X | | | | | X | | X | | | | X | | | | | |
| | 6 | | X | X | X | X | X | X | X | X | X | X | | | X | | X | X | | X | X |
| | 8 | | | X | X | X | X | X | X | X | X | X | | X | X | X | | X | | | X |
| | 10 | | | | X | X | X | X | X | X | X | X | X | X | X | X | | X | X | | X |
| | 12 | | | | | X | X | X | X | X | X | X | | X | X | X | | X | | | X |
| | 14 | | | | | | X | X | X | X | X | X | X | X | X | | | X | | | X |
| | 16 | | | | | | | X | X | X | | X | | | | X | X | | X | | X |
| | 18 | | | | | | | | X | X | X | X | | | | X | X | | X | | X |
| | 20 | | | | | | | | | X | X | X | | | | X | | | X | | X |
| | 22 | | | | | | | | | | X | X | X | | | | | | | | |
| | 24 | | | | | | | | | | | X | | | | X | | | X | | X |
| | 28 | | | | | | | | | | | | | | X | | | | | | |
| | 30 | | | | | | | | | | | | | | | X | | | X | | |
| | 36 | | | | | | | | | | | | | | | | | | X | | X |

| Height | V4004DW | | | | | | | | | | | | | | | | Width | | | | | | | | | | | | | | | |
|--------|---------|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|-------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|
| | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 30 | 34 | 36 | 42 | 44 | | | | | | | | | | | | | | | | |
| | 4 | X | X | X | X | X | X | X | X | X | X | X | X | | | | | | | | | | | | | | | | | | | |
| | 5 | | | | | | | | | | | X | | | | | | | | | | | | | | | | | | | | |
| | 6 | X | X | X | X | X | X | X | X | X | X | X | | | X | | | | | | | | | | | | | | | | | |
| | 8 | | | X | X | X | X | X | X | | | X | X | | X | | | | | | | | | | | | | | | | | |
| | 10 | | | | X | X | | X | X | X | | X | X | | | X | | | | | | | | | | | | | | | | |
| | 12 | | | | | X | X | X | X | X | | X | X | | X | | | | | | | | | | | | | | | | | |
| | 14 | | | | | | X | X | X | | X | X | | | | | | | | | | | | | | | | | | | | |
| | 16 | | | | | | | X | X | | | X | | | | X | | | | | | | | | | | | | | | | |
| | 18 | | | | | | | | X | | | X | | | | X | | | | | | | | | | | | | | | | |
| | 20 | | | | | | | | | X | | | | | X | | | | | | | | | | | | | | | | | |
| | 22 | | | | | | | | | | | X | | | | | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | X | | | | | | | | | | | | | | | | | | | | | |
| 30 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


V4004AL / V4004DAL

Aluminum Double Deflection Registers




GRILLES | SUPPLY

V4004AL / V4004DAL



V4004AL



V4004DAL

MODEL


V4004AL Aluminum Double Deflection Register
V4004DAL Aluminum Double Deflection Register
w/ OBD

FEATURES

- Aluminum construction
- Vertical front blades/horizontal rear blades
- Individually adjustable blades
- OBD option available (V4004DW)
- Aluminum finish

SPECIAL ORDER OPTIONS

- Horizontal front blades
- Heavy duty option
- Custom sizes available

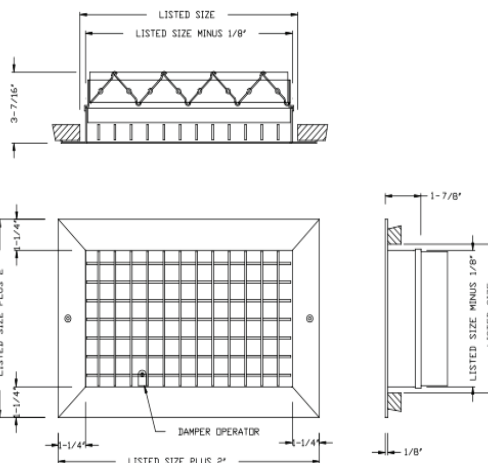

WEB SEARCH: V4004AL / V4004DAL



V4004AL / V4004DAL

Aluminum Double Deflection Registers

| V4004AL | | Width | | | | | | | | | | | | | | | | | |
|---------|----|-------|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| Height | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 48 | |
| | 4 | X | X | X | X | X | X | X | X | X | X | X | | X | | X | X | X | |
| | 6 | X | X | X | X | X | X | X | X | X | X | X | | X | | | | | |
| | 8 | | X | X | X | X | X | X | X | | X | | X | X | | X | | | |
| | 10 | | | X | X | X | X | X | X | | X | | | X | X | | | | |
| | 12 | | | | X | X | X | X | X | | X | | | | | | | X | |
| | 14 | | | | | X | X | X | X | | X | X | | X | | | | X | |
| | 16 | | | | | | X | X | X | | X | | | X | | | X | X | |
| | 18 | | | | | | | X | X | X | X | | | X | | | X | X | |
| | 20 | | | | | | | | | X | | X | | | X | | | | |
| | 24 | | | | | | | | | | | X | | | | | | | X |
| | 30 | | | | | | | | | | | | | | X | | | | |
| | 36 | | | | | | | | | | | | | | | | | X | |
| | 48 | | | | | | | | | | | | | | | | | | X |

| V4004DAL | | Width | | | | | | | | | | | | | | | |
|----------|----|-------|---|----|----|----|----|----|----|----|----|----|----|----|----|--|--|
| Height | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 26 | 28 | 30 | 36 | 48 | | |
| | 4 | X | X | X | X | X | X | | X | | | | | X | X | | |
| | 6 | X | X | X | X | X | X | | | | | | | | | | |
| | 8 | | X | X | X | X | X | X | | | | | | X | X | | |
| | 10 | | | X | X | X | X | | | X | | X | X | | | | |
| | 12 | | | | X | | | X | X | X | X | | | | | | |
| | 14 | | | | | | | | X | | | | | | | | |
| | 16 | | | | | | X | | | | | | | | | | |
| | 30 | | | | | | | | | | | | X | X | | | |

C1LMW / C1LMAL / C1SMW

Curved Blade Registers



GRILLES | SUPPLY

C1LMW / C1LMAL / C1SMW



C1LMW



C1LMAL



C1SMW

MODEL


C1LMW White One Way Curved Blade
C1LMAL Aluminum One Way Curved Blade
C1SMW White One Way Short Throw
C1SMAL Aluminum One Way Short Throw

FEATURES

- 1-way pattern
- Aluminum construction
- Multi-shutter damper
- Individually adjustable blades
- Short pattern (C1SMW)

SPECIAL ORDER OPTIONS

- Grille only
- With OBD
- Black finish
- No screw holes
- Additional sizes

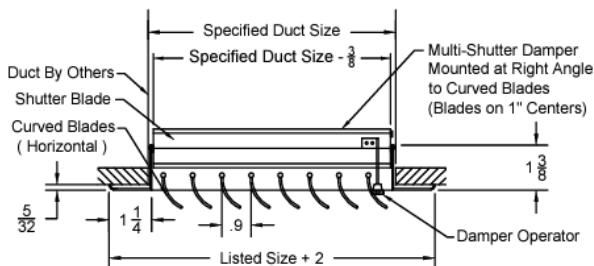

WEB SEARCH: C1LMW / C1LMAL / C1SMW

| Height | C1LMW | | | | Width | | | | | |
|--------|-------|---|---|----|-------|----|----|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 |
| | 4 | X | X | X | X | X | X | X | X | |
| | 6 | X | X | X | X | X | X | X | X | X |
| | 8 | | X | X | X | X | X | X | X | |
| | 10 | | | X | X | X | X | X | | |
| | 12 | | | | X | X | X | | | |
| | 14 | | | | | X | X | | | |
| | 16 | | | | | | X | | X | |

| Height | C1LMAL Width | | | | | | |
|--------|--------------|---|----|----|----|----|--|
| | 6 | 8 | 10 | 12 | 14 | 16 | |
| | X | X | X | X | X | | |
| | X | X | X | X | X | X | |
| | | | X | X | X | | |
| | | | | X | X | X | |
| | | | | X | X | | |
| | | | | | X | | |

| Height | C1SMW Width | | | |
|--------|-------------|----|----|--|
| | 10 | 12 | 14 | |
| | X | X | X | |
| | X | X | | |

C2LMW / C2LMAL / C2SMW / C2SMAL

Curved Blade Registers



GRILLES | SUPPLY

C2LMW / C2LMAL / C2SMW / C2SMAL



C2LMW



C2LMAL



C2SMW



C2SMAL

MODEL


C2LMW White Two Way Curved Blade
C2LMAL Aluminum Two Way Curved Blade
C2SMW White Two Way Short Throw
C2SMAL Aluminum Two Way Short Throw

FEATURES

- 2-way pattern
- Aluminum construction
- Multi-shutter damper
- Individually adjustable blades
- Short pattern (C2SMW)

SPECIAL ORDER OPTIONS

- Grille only
- With OBD
- Black finish
- No screw holes
- Additional sizes

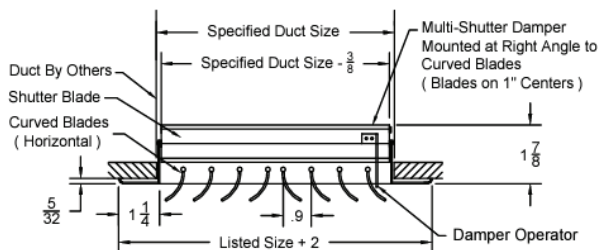

WEB SEARCH: C2LMW / C2LMAL / C2SMW / C2SMAL



C2LMW / C2LMAL / C2SMW / C2SMAL

Curved Blade Registers

| Height | C2LMW | | Width | | | | |
|--------|-------|---|-------|----|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 | 16 |
| | 4 | X | X | X | X | X | |
| | 6 | X | X | X | X | X | X |
| | 8 | | X | X | X | X | X |
| | 10 | | | X | X | X | X |
| | 12 | | | | X | X | X |
| | 14 | | | | | X | |

| Height | C2LMAL | | Width | | | |
|--------|--------|---|-------|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 |
| | 6 | | | X | X | X |
| | 8 | | | | | |
| | 10 | | | X | | |
| | 12 | | | | X | |

| Height | C2SMW | | Width | | |
|--------|-------|---|-------|----|----|
| | | 8 | 10 | 12 | 14 |
| | 4 | X | X | X | X |
| | 6 | X | X | X | X |
| | 8 | | X | X | X |

| Height | C2SMAL | | Width | | |
|--------|--------|----|-------|----|--|
| | | 10 | 12 | 14 | |
| | 6 | X | | | |
| | 8 | | | X | |

C3MW / C3MAL

Curved Blade Registers



GRILLES | SUPPLY

C3MW / C3MAL



C3MW



C3MAL

MODEL

C3MW White Three-Way Curved Blade Register


C3MAL Aluminum Three-Way Curved Blade Register

FEATURES

- 3-Way pattern
- Aluminum construction
- Multi-shutter damper
- Individually adjustable blades

SPECIAL ORDER OPTIONS

- Grille only
- With OBD
- Black finish
- No screw holes
- Additional sizes

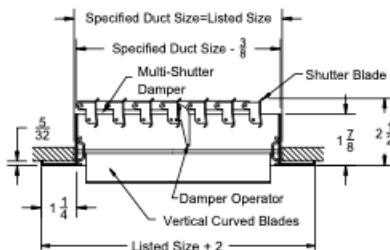

WEB SEARCH: C3MW / C3MAL

| Height | C3MW | | Width | | | |
|--------|------|---|-------|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 |
| | 4 | X | X | X | X | X |
| | 6 | X | X | X | X | X |
| | 8 | | X | X | X | X |
| | 10 | | | X | X | X |
| | 12 | | | | X | X |
| | 14 | | | | | X |

| Height | C3MAL | | Width | | | |
|--------|-------|---|-------|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 |
| | 4 | | X | X | X | X |
| | 6 | X | | | X | X |
| | 8 | | | | X | X |

C4MW / C4MAL

Curved Blade Registers



GRILLES | SUPPLY

C4MW / C4MAL



C4MW



C4MAL

MODEL

C4MW White Four-Way Curved Blade Register


C4MAL Aluminum Four-Way Curved Blade Register

FEATURES

- 4-Way pattern
- Aluminum construction
- Multi-shutter damper
- Individually adjustable blades

SPECIAL ORDER OPTIONS

- Grille only
- With OBD
- Black finish
- No screw holes
- Additional sizes

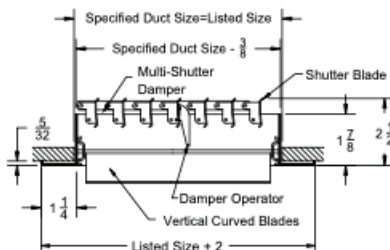

WEB SEARCH: C4MW / C4MAL

| C4MW | | Width | | | | | | | |
|--------|----|-------|---|---|----|----|----|----|----|
| Height | | 6 | 8 | 9 | 10 | 12 | 14 | 16 | 18 |
| | 4 | | X | | X | X | X | | |
| | 6 | X | X | | X | X | X | | |
| | 8 | | X | | X | X | X | X | |
| | 9 | | | X | | | | | |
| | 10 | | | | X | X | X | | |
| | 12 | | | | | X | X | | |
| | 14 | | | | | | X | | |
| | 16 | | | | | | | X | |
| | 18 | | | | | | | | X |

| C4MAL | | Width | | | | | | |
|--------|----|-------|---|---|----|----|----|--|
| Height | | 6 | 8 | 9 | 10 | 12 | 14 | |
| | 6 | X | | | | X | | |
| | 8 | | X | | X | | | |
| | 9 | | | X | | | | |
| | 10 | | | | X | | | |
| | 12 | | | | | X | | |
| | 14 | | | | | | X | |

AL160ML SERIES

Aluminum Square Face Ceiling Diffuser



GRILLES | SUPPLY

AL161MLW / AL162MLW / AL163MLW / AL164MLW / AL165MLW



AL161MLW



AL162MLW



AL163MLW



AL164MLW

MODEL

AL161MLW One-Way Ceiling Diffuser
AL162MLW Two-Way Ceiling Diffuser
AL163MLW Three-Way Ceiling Diffuser
AL164MLW Four-Way Ceiling Diffuser
AL165MLW Two-Way Corner Ceiling Diffuser

FEATURES

- 1-way, 2-way, 3-way, 4-way, 2-way corner pattern
- Aluminum construction
- Beveled frame with removable core
- Individually adjustable blades
- White finish

SPECIAL ORDER OPTIONS

- 24x24 panel diffuser



AL165MLW





WEB SEARCH: AL161MLW / AL162MLW / AL163MLW / AL164MLW / AL165MLW

AL160ML Series Width

| Height | 6 | 8 | 10 | 12 | 14 |
|--------|---|---|----|----|----|
| | X | | | | |
| | | X | | | |
| | | | X | | |
| | | | | X | |
| | | | | | X |


4 WAY CORE SHOWN

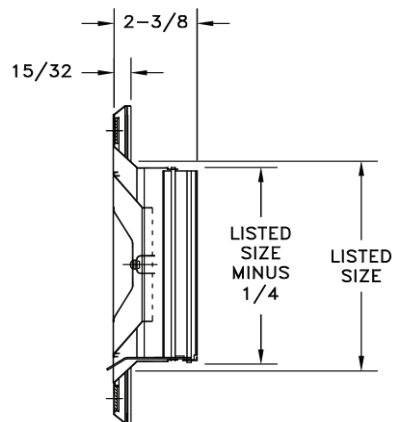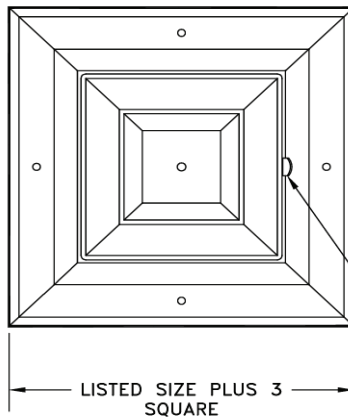


AIR VOLUME CONTROL LEVER

FLOW PATTERNS


1 WAY
MODEL AL 161




2 WAY
MODEL AL 162




3 WAY
MODEL AL 163



4 WAY
MODEL AL 164



2 WAY
CORNER
MODEL AL 165



400 SERIES

Steel Curved Blade Registers



GRILLES | SUPPLY

401MW / 402MW / 403MW / 404MW



401MW



402MW



403MW





404MW

MODEL

- 401MW One-Way Curved Blade
- 402MW Two-Way Curved Blade
- 403MW Three-Way Curved Blade
- 404MW Four-Way Curved Blade

FEATURES

- 1-way, 2-way, 3-way, 4-way curved blade
- Steel construction
- Multi-shutter damper
- White finish

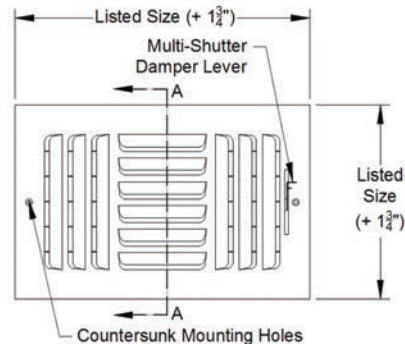

WEB SEARCH: 401MW / 402MW / 403MW / 404MW

| 401MW | | Width | | | | | |
|--------|----|-------|---|----|----|----|----|
| Height | | 6 | 8 | 10 | 12 | 14 | 16 |
| | 4 | | X | X | X | X | |
| | 6 | X | X | X | X | X | X |
| | 8 | | X | X | X | X | |
| | 10 | | | X | X | X | |
| | 12 | | | | X | | |

| 402MW | | Width | | | |
|--------|----|-------|----|----|----|
| Height | | 8 | 10 | 12 | 14 |
| | 4 | X | X | X | |
| | 6 | | X | X | X |
| | 8 | | X | X | X |
| | 10 | | X | | |
| | 12 | | | X | |

| 403MW | | Width | | | | |
|--------|----|-------|----|----|----|----|
| Height | | 8 | 10 | 12 | 14 | 16 |
| | 4 | X | X | X | X | |
| | 6 | X | X | X | X | X |
| | 8 | X | X | X | X | |
| | 10 | | X | X | | |
| | 12 | | | X | X | |
| | 14 | | | | X | |

| 404MW | | Width | | | | |
|--------|----|-------|----|----|----|----|
| Height | | 8 | 10 | 12 | 14 | 16 |
| | 8 | X | | | | |
| | 10 | | X | | | |
| | 12 | | | X | | |
| | 14 | | | | X | |
| | 16 | | | | | X |

RHW

Aluminum Return Grille



GRILLES | RETURN

RHW



RHW

MODEL

RHW White Return Grille

FEATURES


- Aluminum construction
- Horizontal blades fixed at 45 degrees
- 2/3" spacing between blades
- Blades recess 1.25" into hole opening
- Commercial grade
- White finish

SPECIAL ORDER OPTIONS

- With OBD damper
- Zero degree deflection
- Odd dimension sizes
- Larger than 48"
- Insect screens
- Black finish
- Mill finish
- Removable face
- Anodized finish
- No screw holes



WEB SEARCH: RHW

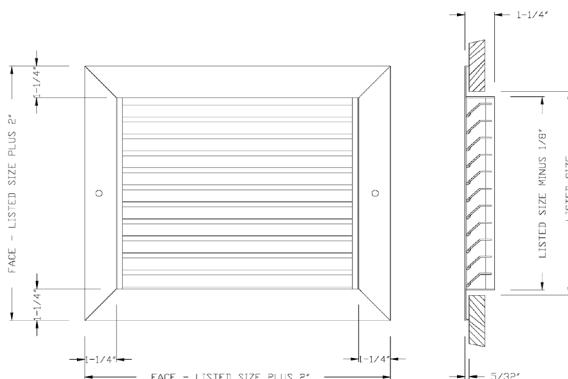



RHW

Aluminum Return Grille

| RHW | | | Width | | | | | | | | | | | | | | | | | | | | | |
|--------|----|---|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| Height | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 25 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 | 42 | 44 | 46 | 48 |
| | 4 | X | X | X | X | X | X | X | X | X | X | | | X | X | | | X | X | X | X | | | X |
| | 5 | | | | X | X | | | | | X | | | | | | | | | | | | | |
| | 6 | X | X | X | X | X | X | X | X | X | X | | X | X | X | | X | X | X | X | | | | X |
| | 8 | | X | X | X | X | X | X | X | X | X | | X | X | X | X | X | X | X | X | | X | X | X |
| | 10 | | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | | X | | X |
| | 12 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | | | X |
| | 14 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | | | X |
| | 16 | | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | | | X |
| | 18 | | | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | | | X |
| | 20 | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 22 | | | | X | | X | X | X | X | X | | X | X | X | X | X | | | | | | | X |
| | 24 | X | | X | X | X | X | X | X | | X | | X | X | X | X | X | X | X | X | X | X | X | X |
| | 25 | | | | | X | X | | X | | | X | | | | | | | | | | | | |
| | 26 | | | | | | X | X | | X | | | X | X | X | X | | | | | | | | X |
| | 28 | | | | X | X | X | X | X | | | | | X | X | | | | | | | | | X |
| | 30 | X | X | X | X | X | X | X | X | | X | X | | X | X | X | X | X | | X | X | | | X |
| | 32 | | | | | X | | X | | | X | | | | | X | X | X | | | X | | | X |
| | 34 | | | X | | | | | | | | | | | | | | X | X | | | | | X |
| | 36 | | | | X | X | X | X | X | X | X | | | | X | | | X | | X | | | | X |
| | 38 | | | | | | | | | X | | | | | | | | | X | | | | | |
| | 40 | | | | X | X | | X | X | | X | | | | X | | | X | | X | | | | |
| | 42 | | | | | | | | | | X | | | | X | | | | | | | | | |
| | 46 | | | | | | | | | | | | | | | | | | | | | | | X |
| 48 | | | X | | X | X | X | X | | X | | | | X | | | X | | | | | | X | |

RHAL

Aluminum Return Grille



GRILLES | RETURN

RHAL



RHAL

MODEL

RHAL Aluminum Return Grille

FEATURES


- Aluminum construction
- Painted aluminum finish
- Horizontal blades fixed at 45 degrees
- 2/3" spacing between blades
- Blades recess 1.25" into hole opening
- Commercial grade

SPECIAL ORDER OPTIONS

- With OBD damper
- Zero degree deflection
- Odd dimension sizes
- Larger than 48"
- Special screw hole placement
- Insect screens
- Black finish
- Mill finish
- Anodized finish
- Removable face
- No screw holes



WEB SEARCH: RHAL

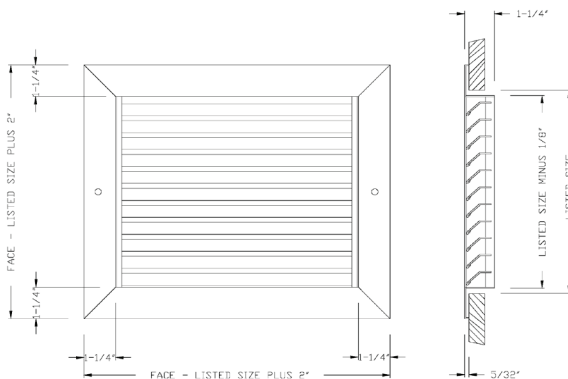

| Height | RHAL | | Width | | | | | | | | | | | | | | | | | |
|--------|------|---|-------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|--|
| | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 36 | 38 | 40 | 44 | 48 | |
| 4 | X | X | X | X | X | | X | | | | | | X | | | | | | | |
| 6 | X | | X | X | X | X | X | X | X | X | X | | X | | X | | | | X | |
| 8 | | X | X | X | X | X | X | | | X | | | | | | | | | | |
| 10 | | X | X | | X | X | X | X | | X | X | X | X | | X | | X | | X | |
| 12 | | | | X | X | X | X | X | | X | X | X | X | | X | | | | X | |
| 14 | | | | X | X | X | | X | X | X | X | | X | | | X | X | | X | |
| 16 | | | | | | X | | X | | X | | X | X | | X | | | | | |
| 18 | | | | X | X | X | X | X | | X | | | X | X | | | | | | |
| 20 | | | X | X | X | | | X | X | | | | X | | X | | | X | X | |
| 22 | | | | | | | | X | X | X | | | | | | | | | | |
| 24 | | | | X | X | X | | X | | X | | | X | X | X | | | | X | |
| 25 | | | | | | | | X | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | X | | | | | | | | | | |
| 30 | | | | | X | X | | X | | X | | | X | | | | | | | |
| 32 | | | | | | | | | | | | | | X | | | | | | |
| 34 | | | | | | | | | | | | | | | | | | | | |
| 36 | | | | | | | | X | | X | | | | | X | | | | X | |
| 40 | | | | | | | | | | | | | | | | | X | | | |
| 48 | | | | | X | X | | | | | | | X | | | | | | X | |


4538W / 4538SW

Heavy Duty Aluminum / Steele Return Grille



GRILLES | RETURN

4538W / 4538SW

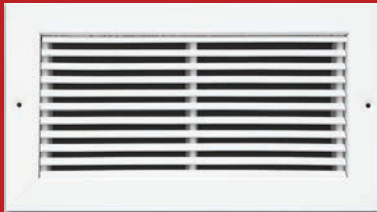

4538W
4538SW

MODEL

4538W Heavy Duty Aluminum Return Grille
4538SW Heavy Duty Steel Return Grille

FEATURES

- Heavy duty steel and aluminum construction
- Fixed horizontal blades set at 38°
- Designed for applications such as Gymnasiums & public areas
- Non stock Item (2 week lead)
- Commercial grade

SPECIAL ORDER OPTIONS



- With OBD damper
- Zero degree deflection
- 1" filter grille
- Stainless steel option (45° Deflection)
- Satin silver finish



WEB SEARCH: 4538W / 4538SW

SIZES FROM 6" x 4" TO 144" x 144"

PLEASE VISIT WEBSITE OR
CALL FOR A QUOTE

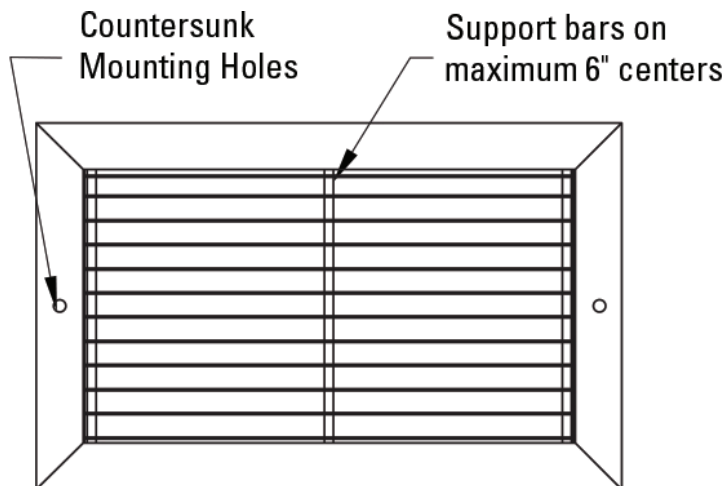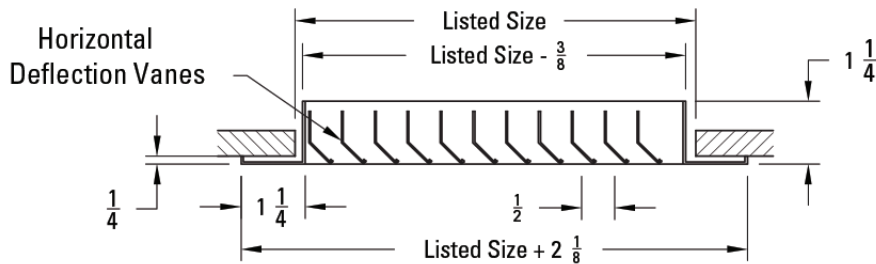


CC5W

Egg Crate Aluminum Return Grille



GRILLES | RETURN

CC5W



CC5W

MODEL

CC5W Egg Crate Aluminum Return Grille

FEATURES

- Egg cage / cube core grille
- Aluminum construction
- 1/2" x 1/2" x 1/2"
- Commercial grade
- White finish

SPECIAL ORDER OPTIONS

- With OBD damper
- 1" x 1" x 1" / .5" x .5" x 1"
- 1" Filter grille
- 45° sight proof
- Stainless steel
- Aluminum finish
- Black finish




WEB SEARCH: CC5W

CC5W

Width

Height

| | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 30 | 34 | 36 | 40 | 48 |
|----|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 4 | X | X | X | X | | | | | | X | | | X | | |
| 6 | X | X | X | X | X | X | X | | | X | X | | X | | |
| 8 | | X | X | X | X | X | X | X | | X | X | | | | |
| 10 | | | X | X | X | X | X | X | | X | X | | | | |
| 12 | | | | X | X | X | X | X | | X | X | | X | | |
| 14 | | | | | X | X | X | X | | X | X | | X | | |
| 16 | | | | | | X | | X | | X | X | | X | | |
| 18 | | | | | | | X | | | X | X | | X | | |
| 20 | | | | | | | | X | | X | X | | X | X | X |
| 22 | | | | | | | | | X | | X | | | | |
| 24 | | | | | | | | | | X | X | | X | | X |
| 26 | | | | | | | | | | | X | | | | |
| 28 | | | | | | | | | | | X | | | | |
| 30 | | | | | | | | | | | X | | | | |
| 34 | | | | | | | | | | | | X | | | |
| 36 | | | | | | | | | | | | | X | | X |

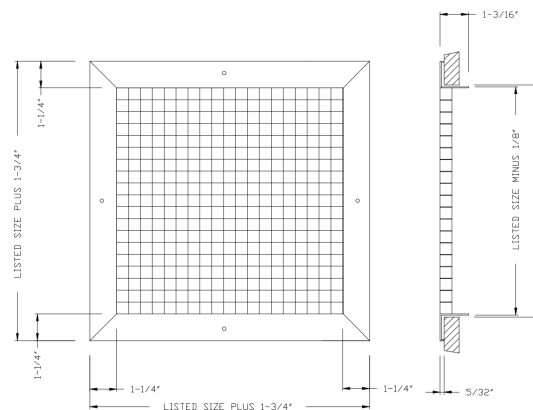

DGDFW / DGDFAL

Aluminum Door Grilles



GRILLES | RETURN

DGDFW / DGDFAL



DGDFW



DGDFAL

MODEL



DGDFW White Door Grille
DGDFAL Aluminum Door Grille

FEATURES

- Aluminum construction
- Fixed “V” blades set at 70 degrees
- Sightproof
- 2 sided telescoping frame
- Fits door 1 1/26” to 2 1/8” thick
- Commercial

SPECIAL ORDER OPTIONS

- Fire rated
- Light resistant
- Single flange frame
- Steel construction
- Black finish



WEB SEARCH: DGDFW / DGDFAL

| DGDFW | | Width | | | | | | | | | |
|--------|----|-------|---|----|----|----|----|----|----|----|----|
| Height | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 30 |
| | 6 | X | | | X | X | | | X | | |
| | 8 | | X | | | | X | X | | | |
| | 10 | | | X | | | | | | X | |
| | 12 | | | | X | X | | X | X | X | |
| | 14 | | | | | X | | | | X | |
| | 16 | | | | X | | X | | | | |
| | 18 | | | | X | X | | X | X | | |
| | 20 | | | | X | | | X | X | | |
| | 24 | | | X | X | X | X | | X | X | |
| | 25 | | | | | | | | X | | |
| | 30 | | | | | X | | X | | | X |

| DGDFAL | | Width | | | | | | | | | |
|--------|----|-------|---|----|----|----|----|----|----|----|----|
| Height | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 30 |
| | 4 | | | | X | | | | X | X | X |
| | 6 | X | X | X | X | X | | X | X | | |
| | 8 | | | X | X | X | X | X | | | X |
| | 10 | | | X | X | X | | X | | | X |
| | 12 | | | | X | | | X | X | X | X |
| | 14 | | | | X | X | | | X | X | X |
| | 16 | | | | | X | X | | X | | |
| | 18 | | | | X | | X | X | X | X | |
| | 20 | | | X | | | | X | X | X | |
| | 24 | | | | X | | X | X | | X | X |
| | 30 | | | | X | X | | | | X | |
| | 36 | | | | | | | | | X | |

1400W

Stamped Face Steel Return Grille



GRILLES | RETURN

1400W



1400W

MODEL

1400W Stamped Face Steel Return Grille

FEATURES

- For wall / ceiling applications
- Flat (does not recess into hole opening)
- Steel construction
- Residential

SPECIAL ORDER OPTIONS

- Limited
- For more options, look at “RHW” on page 32




WEB SEARCH: 1400W

1400W

Width

Height

| | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 25 | 26 | 28 | 30 | 32 | 34 | 36 | 38 | 40 |
|----|---|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 2 | | | | | | X | | X | | X | | | | X | | | | | |
| 4 | X | X | X | X | X | X | X | X | | X | | | | X | | | | | |
| 6 | X | X | X | X | X | X | X | X | | X | | | | X | | | X | | X |
| 8 | | X | X | X | X | X | X | X | | X | | | | X | | | X | | |
| 10 | | | X | X | X | X | X | X | | X | | | | X | | | X | | |
| 12 | | | X | X | X | X | X | X | X | X | X | X | | X | | | X | | |
| 14 | | X | X | X | X | X | X | X | X | X | X | X | X | | | | X | | |
| 16 | | X | | X | | X | X | X | | X | X | X | | X | | | X | | |
| 18 | | | | X | | | X | X | | X | | | | X | | | X | | |
| 20 | | | X | X | X | X | X | X | | X | X | | | X | | | X | | X |
| 22 | | | | | X | | | | | | | | | | | | | | |
| 24 | | | X | X | X | X | X | X | | X | | | | X | | | X | | |
| 25 | | | | | X | X | | X | | | X | | | | | | | | |
| 30 | | X | X | X | X | X | X | X | | X | | | | X | | | | | |
| 36 | | | | X | X | X | X | X | | X | | | | | | | X | | |

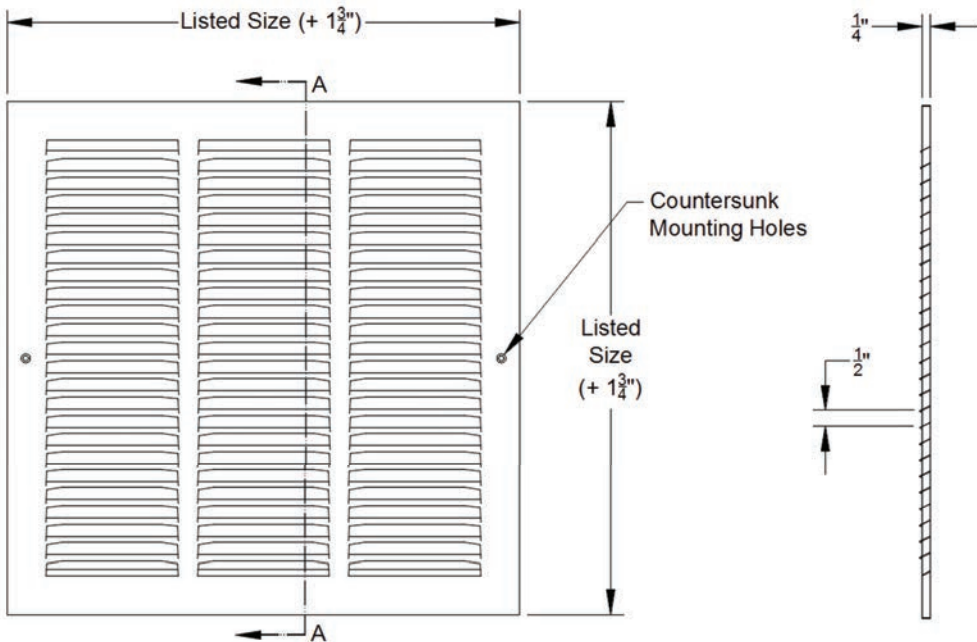

550SS

Stainless Steel Return Grille



GRILLES | RETURN

550SS



550SS

MODEL

550SS Stainless Steel Return Grille

FEATURES

- Type 304 stainless construction
- #6 x 1.25" stainless steel metal screws
- #4 satin polished finish
- Air foil blades are non-adjustable; set at 0° or 45°
- .75" blade spacing
- Free area approximately 50%
- Countersunk mounting screw holes

SPECIAL ORDER OPTIONS


- Type 316 stainless steel
- Custom blade spacing - .5" blade centers
- Antimicrobial epoxy powdercoat finish options
- Opposed blade damper
- Ducted transition; inlet options: round, square or rectangle




WEB SEARCH: 550SS

SIZES FROM 6" x 6" TO 24" x 24"

PLEASE VISIT WEBSITE OR
CALL FOR A QUOTE

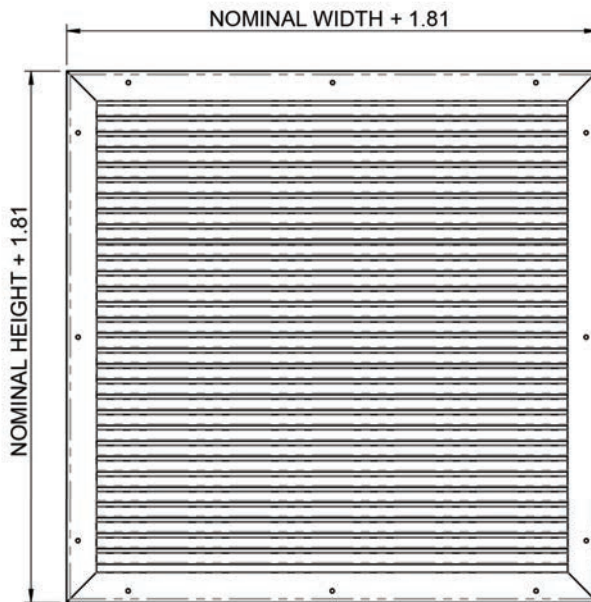

FACE VIEW

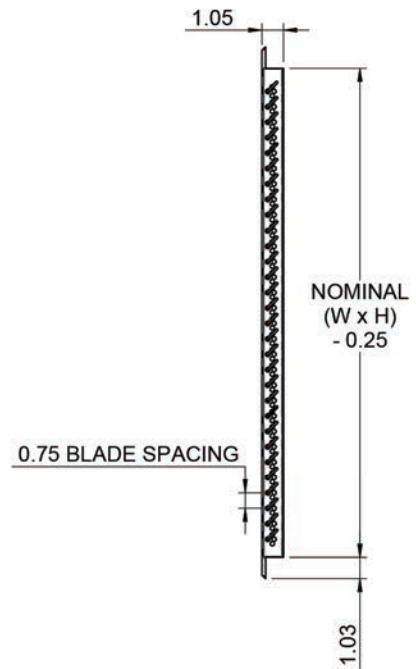

SECTION A-A

1410FW

Steel Return Filter Grille



GRILLES | FILTER RETURN

1410FW



1410FW

MODEL

1410FW White Steel Return Filter Grille

FEATURES

- For wall / ceiling applications
- Holds 1" filter (sold separately)
- Steel construction
- Residential

SPECIAL ORDER OPTIONS

- Limited
- For more options, look at "RHFW" on page 48




WEB SEARCH: 1410FW

1410FW

Width

| | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 25 | 28 | 30 | 32 | 36 | 40 |
|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 6 | | X | X | X | | | | | X | | | X | | | |
| 8 | X | X | | X | | | X | | X | | | X | | | |
| 10 | | X | | X | X | X | X | X | X | | | X | | | |
| 12 | | | X | | | X | X | | X | X | | | | X | |
| 14 | | | | X | X | X | | | X | X | X | X | | X | |
| 16 | | X | | | X | | X | | X | X | | X | | X | |
| 18 | | | X | | | X | X | | X | | | X | | X | |
| 20 | | X | X | X | X | X | X | | X | X | | X | | X | X |
| 22 | | | | | | | | X | | | | | | | |
| 24 | | X | X | X | X | X | X | | X | | | X | | X | |
| 25 | | | | X | X | X | X | | | X | | | X | | |
| 26 | | | | X | | | | | | | | | | | |
| 30 | | X | X | X | X | X | X | | X | | | X | | X | |
| 32 | | | | | | | X | | | X | | | | | |
| 36 | | | X | | X | X | X | | X | | | | | | |
| 40 | | | | | | | X | | | | | | | | |

Height

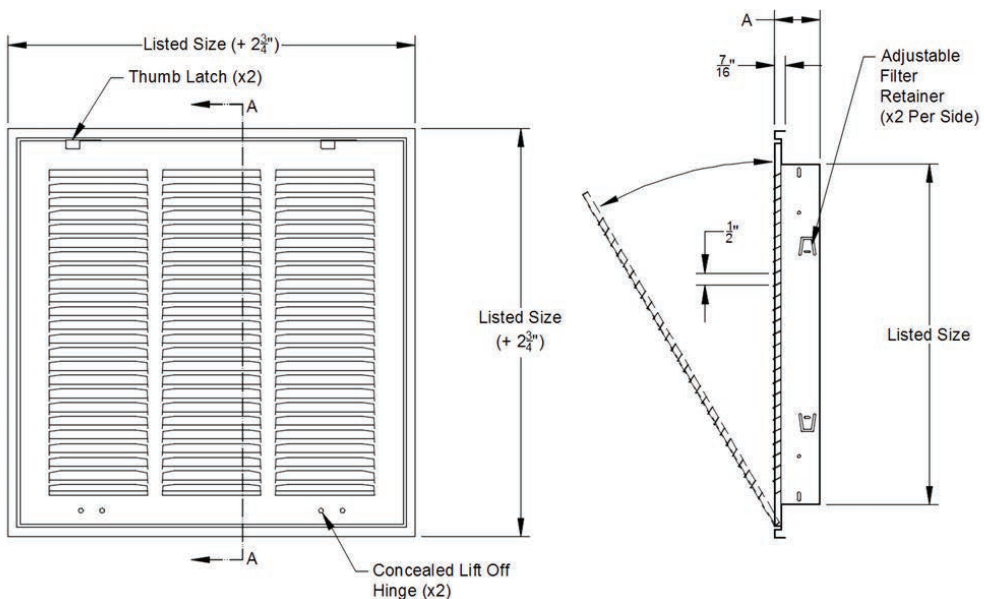


RHFW

Aluminum Return Filter Grilles



GRILLES | FILTER RETURN

RHFW



RHFW

MODEL

RHFW White Return Filter Grilles

FEATURES

- Aluminum construction
- Accepts standard 1" filter (sold separately)
- Commercial grade


SPECIAL ORDER OPTIONS

- 2" filter size
- 4" filter size
- Black finish
- Removable face
- Knurled knobs
- Quarter turn latches
- Stainless steel
- Zero degree blades
- Face mounted screw holes
- Opposed blade damper



WEB SEARCH: RHFW

| Height | RHFw | | | | | | | | | | Width | | | | | | | | | | | | | |
|--------|------|---|----|----|----|----|----|----|----|----|-------|----|----|----|----|----|----|----|----|----|---|---|--|--|
| | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 25 | 26 | 28 | 30 | 32 | 34 | 36 | 40 | 42 | 48 | | | | |
| | 4 | X | | | | | | | | | | | | | | | | | | | | | | |
| | 6 | X | | X | X | X | X | X | X | X | | X | X | X | | | X | | | X | | | | |
| | 8 | | X | X | X | X | X | X | X | X | | | X | X | X | | X | | | X | | | | |
| | 10 | | | X | X | X | X | X | X | X | X | | X | X | | X | X | | | X | | | | |
| | 12 | | | X | X | X | X | X | X | X | X | X | | X | X | X | X | | | X | | | | |
| | 14 | | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | X | | | X | | | |
| | 16 | | | | X | X | X | | X | X | X | X | X | X | X | X | | X | | | X | | | |
| | 18 | | | X | X | X | X | X | X | X | X | | X | X | | | X | X | | | X | | | |
| | 20 | | | X | X | X | X | X | X | X | X | | | X | X | | | X | X | | X | | | |
| | 22 | | | | | | | | | | | X | X | X | | | | | | | | | | |
| | 24 | | | X | X | X | X | X | X | X | X | | X | X | X | X | | X | X | X | X | | | |
| | 25 | | | | | X | X | X | X | | | X | | | X | X | | | | | | | | |
| | 26 | | | | | | | | X | X | X | | X | X | | | | | | | | | | |
| | 28 | | | | | | X | | | | | | X | | X | X | | | | | | | | |
| | 30 | X | | X | X | X | X | X | X | | X | X | | | X | | | X | X | | X | | | |
| | 32 | | | | | | X | | X | | X | X | | | | | | X | | | | | | |
| | 34 | | | | | | X | | | | | | | | | | | | | | | | | |
| | 36 | | | X | X | X | X | X | X | X | X | X | | | X | | | X | | | X | | | |
| 40 | | | | | | X | | X | | X | | | | | | | | | | | | | | |
| 48 | | | | | X | | X | | X | X | X | | | | | | X | | X | | | X | | |

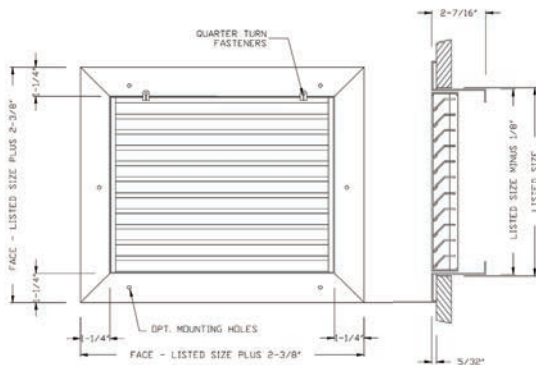

RHFAL

Aluminum Return Filter Grilles



GRILLES | FILTER RETURN

RHFAL



RHFAL

MODEL

RHFAL Aluminum Return Filter Grilles

FEATURES

- Aluminum construction
- Accepts standard 1" filter (sold separately)
- Commercial grade
- Brushed aluminum finish


SPECIAL ORDER OPTIONS

- 2" filter size
- 4" filter size
- Mill finish
- Anodized finish
- Black finish
- Removable face
- Knurled knobs
- Quarter turn latches
- Stainless steel
- Zero degree blades
- Face mounted screw holes
- Opposed blade damper



WEB SEARCH: RHFAL / RHFAL

| Height | RHFAL Width | | | | | | | | | | |
|--------|-------------|----|----|----|----|----|----|----|----|----|----|
| | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 25 | 30 | 36 | 48 |
| 6 | X | X | | X | X | X | X | | | X | |
| 8 | | | | | | | X | | | X | X |
| 10 | X | | X | | | X | X | | X | | X |
| 12 | | X | X | | X | X | X | X | X | X | |
| 14 | | | X | X | X | X | X | X | X | | |
| 16 | | | | X | | X | X | X | X | X | |
| 18 | | | | X | X | | X | X | X | | |
| 20 | X | X | X | X | X | X | X | X | X | | |
| 22 | | | | | | | | | | | |
| 24 | X | X | X | | | X | X | | X | X | X |
| 25 | | X | X | X | X | X | | X | | | |
| 30 | X | | X | | | X | X | | X | | |
| 36 | | X | | | | | X | | | X | |
| 40 | | | | | | X | | | | | |
| 48 | | | | | | | X | | X | | |

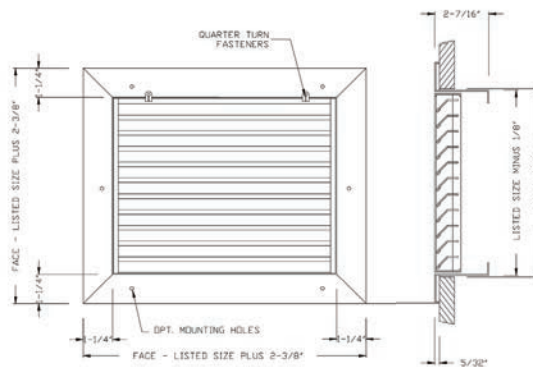

4004PAL

Universal Aluminum Spiral Diffuser



GRILLES | SPIRAL MOUNTED

4004PAL



4004PAL

MODEL

4004PAL Aluminum Spiral Diffuser

FEATURES

- Aluminum construction
- Vertical front blades
- Integral gasket seals
- Includes built-in scoop

SPECIAL ORDER OPTIONS

- Steel
- Without scoop
- Specific duct sizes
- White finish
- Black finish



WEB SEARCH: 4004PAL





4004PAL

Width

Height

| | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 30 | 36 |
|----|----|----|----|----|----|----|----|----|----|----|----|
| 3 | X | X | X | X | X | X | | X | | | |
| 4 | X | X | X | X | X | X | X | X | | X | |
| 6 | | X | X | X | X | X | X | X | X | X | X |
| 8 | | X | X | X | X | X | | X | | | |
| 10 | | | | X | X | | | X | | | |
| 12 | | | | | X | | | | | | |

| HEIGHT | WIDTH | | | | | | | | | | | | | | |
|--------|---------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| | 10" | 12" | 14" | 16" | 18" | 20" | 24" | 30" | 36" | 38" | 40" | 42" | 44" | 46" | 48" |
| | MINIMUM / MAXIMUM DUCT DIAMETER | | | | | | | | | | | | | | |
| 3" | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 |
| 4" | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 |
| 6" | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 |
| 8" | - | - | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 |
| 10" | - | - | - | - | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 |
| 12" | - | - | - | - | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 |

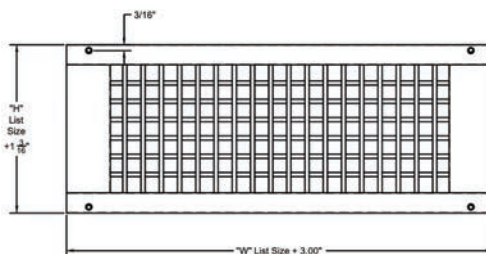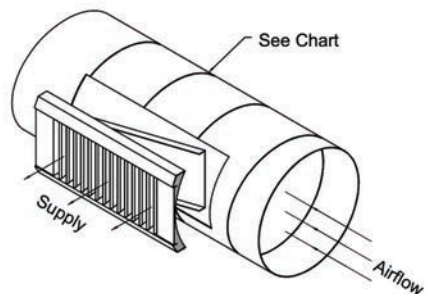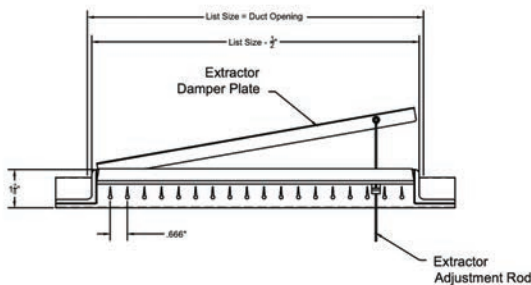

4004SP

Universal Steel Spiral Diffuser



GRILLES | SPIRAL MOUNTED

4004SP



4004SP

MODEL

4004SP Steel Spiral Diffuser

FEATURES

- Steel construction
- Vertical front blades
- Integral gasket seals
- Includes built-in scoop

SPECIAL ORDER OPTIONS





- Aluminum
- Without scoop
- Specific duct sizes
- White finish



WEB SEARCH: 4004SP

| Height | 4004SP Width | | | | |
|--------|--------------|----|----|----|----|
| | 10 | 12 | 14 | 18 | 24 |
| | 3 | X | X | X | X |
| | 4 | X | X | | |
| 6 | | X | X | X | |

| HEIGHT | WIDTH | | | | | | | | | | | | | | | |
|--------|---------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| | 10" | 12" | 14" | 16" | 18" | 20" | 24" | 30" | 36" | 38" | 40" | 42" | 44" | 46" | 48" | |
| | MINIMUM / MAXIMUM DUCT DIAMETER | | | | | | | | | | | | | | | |
| 3" | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | 6/24 | |
| 4" | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | 8/24 | |
| 6" | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | 12/24 | |
| 8" | - | - | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | 20/36 | |
| 10" | - | - | - | - | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | 30/48 | |
| 12" | - | - | - | - | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | 42/48 | |

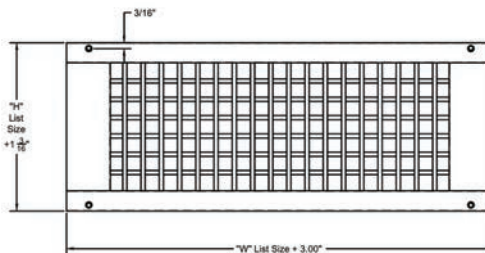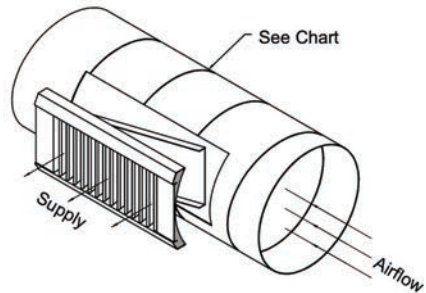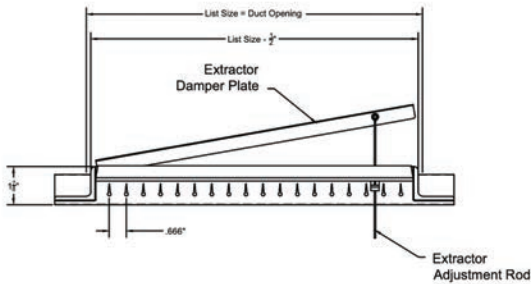

4004CAL

Universal Curved Spiral Diffuser



GRILLES | SPIRAL MOUNTED

4004CAL



4004CAL

MODEL

4004CAL Curved Spiral Diffuser

FEATURES


- Aluminum construction
- Aluminum finish
- Vertical front blades
- Duct mounted, double deflection supply grille with radius end cap
- Duct diameter 6" to 36"

SPECIAL ORDER OPTIONS

- Over 1000 sizes
- White finish



WEB SEARCH: 4004CAL

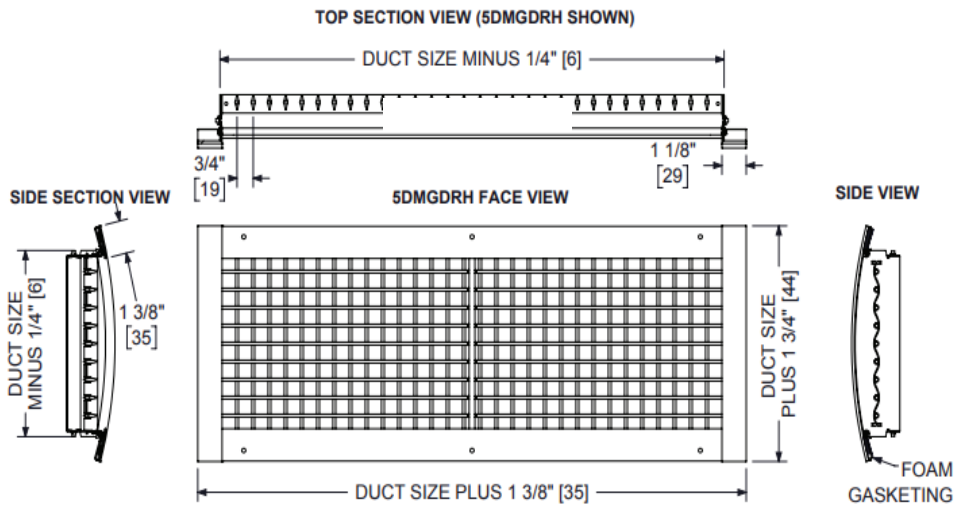

| Height | 3 | 4 | 6 | 8 | 10 | 12 |
|------------------------------|-------|---|------|-------|-------|-------|
| Duct Diameter (Min / Max) | 6/36 | | 8/36 | 10/36 | 12/36 | 14/36 |
| Width (Min / Max) | 10/48 | | | | | 12/48 |

PLEASE VISIT WEBSITE OR
CALL FOR A QUOTE

6600 SERIES

Slot Diffusers



GRILLES | SLOT DIFFUSERS

6610W / 6615W / 6650W / 6675W



6610W

6615W

6650W

6675W

MODEL

6610W Linear Slot Diffuser (1" Slot Width)
6615W Linear Slot Diffuser (1 1/2" Slot Width)
6650W Linear Slot Diffuser (1/2" Slot Width)
6675W Linear Slot Diffuser (3/4" Slot Width)

FEATURES

- Supply linear slot diffuser with integral volume and directional pattern controllers
- Clean appearance and easy installation
- .5", 3/4", 1", and 1.5" slot widths available
- Pattern controllers are aluminum and adjustable from the face of the diffuser, and can be set to adjust volume or throw direction from vertical to horizontal.
- Surface mount
- Mounting brackets and screws included
- White finish
- Available from 1 slot to 8 slots

SPECIAL ORDER OPTIONS


- Architectural slots up to 3" slot width
- Concealed frames
- Mud in frames
- Lay-in frames
- Custom lengths
- Aluminum finish




WEB SEARCH: 6600

| Slot Width | | 1/2" | | 3/4" | | 1" | | 1.5" | |
|------------|-----|------|---|------|---|----|---|------|---|
| # Of Slots | | 1 | 2 | 1 | 2 | 1 | 2 | 1 | 2 |
| Length | 12" | | | | | X | X | | |
| | 24" | | | | | X | X | | |
| | 36" | | | | | X | X | | |
| | 48" | | X | | X | X | X | | X |
| | 60" | | | | | X | X | | |
| | 72" | | | | | X | X | | |
| | 96" | | X | | X | X | X | | X |

- Call for availability on custom number of slots (3,4,5,6,7,8)
- 2-3 day lead time on custom lengths

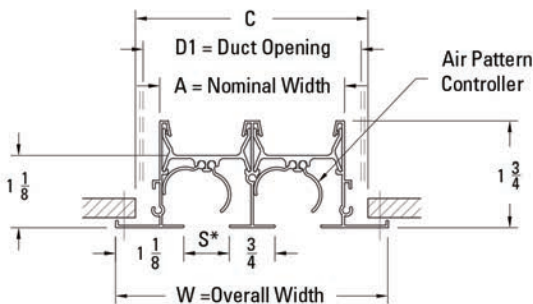

End Border

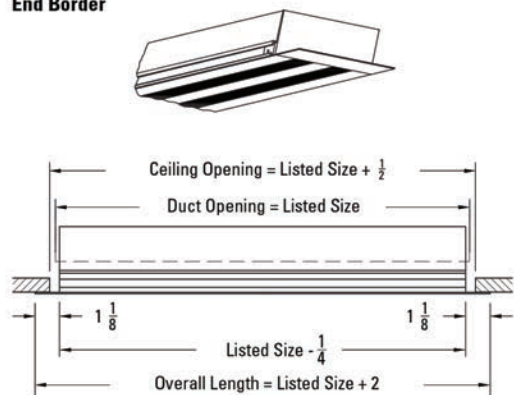



UPI

MODEL

UPI Boot Plenums

FEATURES

- Designed to connect the series 6600 linear slot diffusers
- Units provide an even distribution of air into the series 6600 diffuser to maximize induction and occupant comfort
- Fully insulated - including the end caps
- Can be used for both ducted and plenum returns



WEB SEARCH: UPI


MODELS

UPI 6650: 1/2" Slot - Insulated

UPI 6675: 3/4" Slot - Insulated

UPI 6610: 1" Slot - Insulated

UPI 6615: 1-1/2" Slot - Insulated

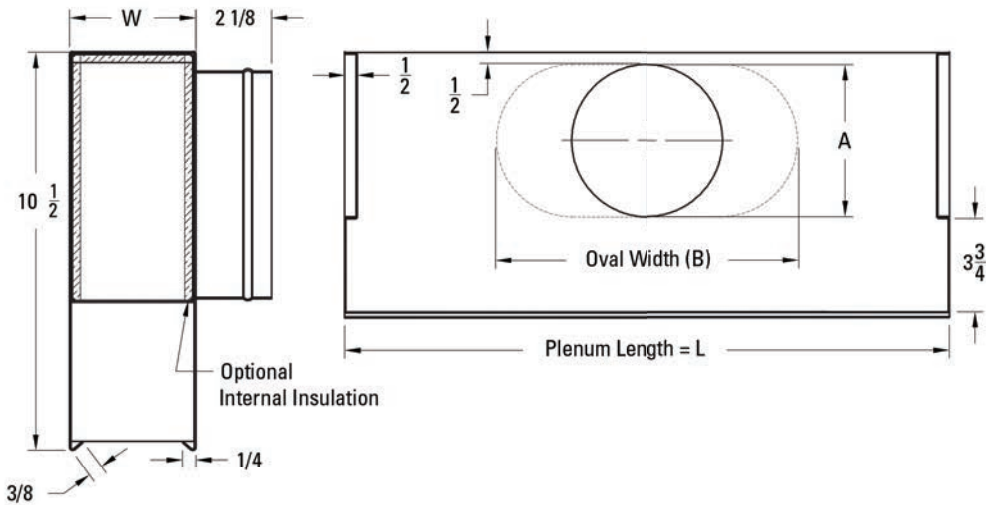

| Model 6650 | 12-1/11-1 12-6 |
|------------|-------------------|
| # of Slots | Dim. W |
| 1 | 2 1/4 |
| 2 | 3 1/2 |
| 3 | 4 3/4 |
| 4 | 6 |
| 5 | 7 1/4 |
| 6 | 8 7/16 |
| 7 | 9 3/4 |
| 8 | 11 |

| Model 6675 | 12-1/11-1 12-6 |
|------------|-------------------|
| # of Slots | Dim. W |
| 1 | 2-1/2 |
| 2 | 4 |
| 3 | 5-1/2 |
| 4 | 7 |
| 5 | 8-1/2 |
| 6 | 10-3/16 |
| 7 | 11-7/16 |
| 8 | 13 |

| Model 6610 | 12-1/11-1 12-6 |
|------------|-------------------|
| # of Slots | Dim. W |
| 1 | 2-3/4 |
| 2 | 4-1/2 |
| 3 | 6-1/8 |
| 4 | 8 |
| 5 | 9-11/16 |
| 6 | 11-1/2 |
| 7 | 13-3/16 |
| 8 | 14-15/16 |

| Model 6615 | *2-1/11-1 12-6 |
|------------|-------------------|
| # of Slots | Dim. W |
| 1 | 3-1/4 |
| 2 | 5-1/2 |
| 3 | 7-3/8 |
| 4 | 10 |

| Inlet Chart | | | |
|-------------|-------|-------|---------|
| Size | Type | A | B |
| 6 | Round | 5-7/8 | |
| 8 | Oval | 5-7/8 | 8-15/16 |
| 10 | Oval | 5-7/8 | 12-1/16 |
| 12 | Oval | 5-7/8 | 15-1/4 |
| 14 | Oval | 5-7/8 | 18-7/16 |

MANY DIFFERENT SIZES AVAILABLE!
VISIT OUR WEBSITE BY SCANNING THE QR CODE TO THE LEFT



PHPSI

MODEL

PHPSI Plenum Slot Diffuser

FEATURES

- Plenum slot diffuser with adjustable pattern controllers.
- Steel supply/return plenum slot diffuser with heavy extruded pattern controllers & gaskets for horizontal discharge patterns.
- Pattern controllers can be adjusted to allow the throw to be changed from vertical to horizontal.
- Non-insulated



WEB SEARCH: PHPSI

PHPSI

24" T-Bar Grid

24x1x8

24x2x6

24x2x8

PHPSI

48" T-Bar Grid



48x1x8

48x2x6

48x2x8

48x2x10

48x2x12

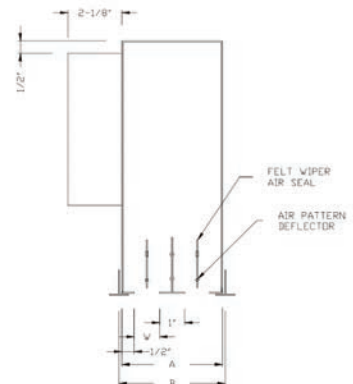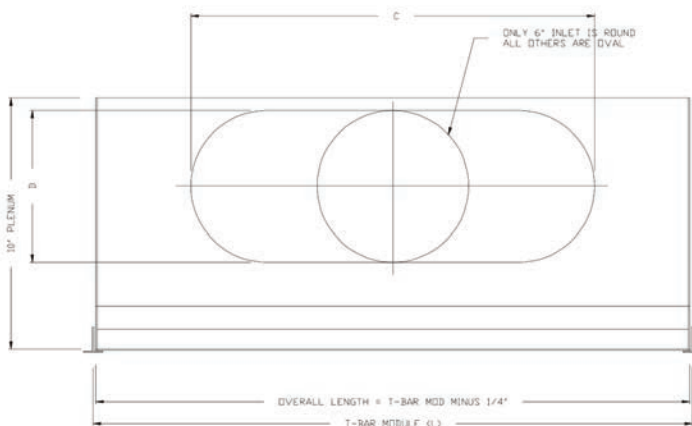

154RB

Steel Floor Return Grille



GRILLES | FLOOR RETURN

154RB



154RB

MODEL

154RB Brown Steel Return Floor Grille

FEATURES

- Residential floor return air grille
- Heave gauge bar construction
- Face bars interlock with crossbracing
- Smooth surface
- Steel construction

SPECIAL ORDER OPTIONS

- Opposed blade damper




WEB SEARCH: 154RB

154RB

Width

Height

| | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 | 25 | 30 | 32 | 34 | 36 | 42 |
|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 4 | X | X | X | X | X | X | X | X | | X | | | | |
| 6 | X | X | X | X | X | X | X | X | | X | | | X | |
| 8 | X | X | X | X | X | X | X | X | | X | | | | |
| 10 | | X | X | X | X | X | X | X | | X | | | | |
| 12 | | | X | X | X | X | X | X | | X | | | | |
| 14 | | | | X | X | X | X | X | X | X | | | | |
| 16 | | | | | X | X | X | X | X | X | | | | |
| 18 | | | | | | X | | X | | X | | | X | |
| 20 | | | | | | | X | X | X | X | X | X | X | |
| 22 | | | | | | | | | | | X | X | | |
| 24 | | | | | | | | X | | X | X | X | X | X |
| 30 | | | | | | | | | | | | X | | |

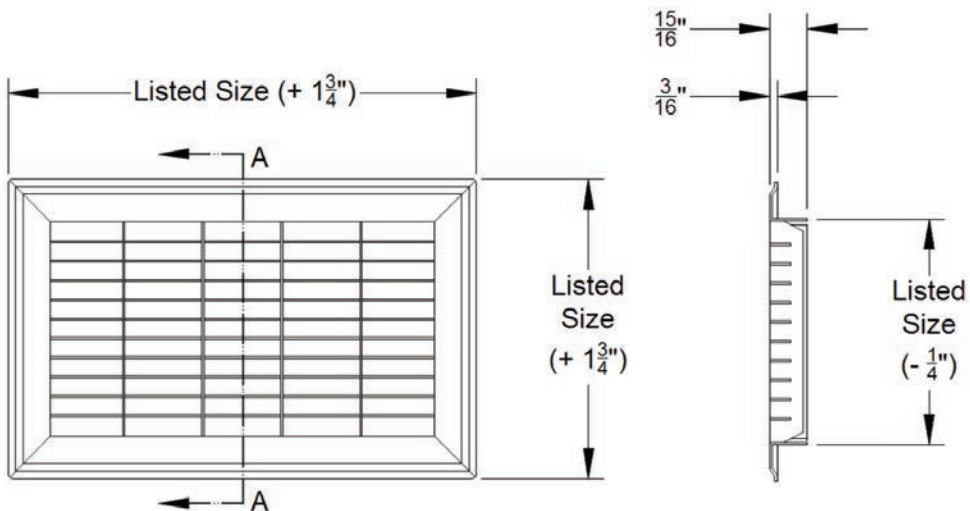

2000FAL

Linear Bar Floor Grille



GRILLES | FLOOR RETURN

2000FAL



2000FAL

MODEL

2000FAL Aluminum Linear Bar Floor Grille

FEATURES

- High grade aluminum construction
- Heavy duty floor application
- Anodized aluminum finish


SPECIAL ORDER OPTIONS

- Opposed blade damper
- Screw holes for wall/ceiling mount
- White and black finish
- Plenums with concealed mounting
- 15° and 30° blade angles
- Core only / no frame
- Tape and spackle mounting



WEB SEARCH: 2000FAL

| 2000FAL | | Width | | | | | | | | | |
|---------|----|-------|----|----|----|----|----|----|----|----|----|
| Height | | 8 | 10 | 12 | 14 | 18 | 20 | 24 | 30 | 36 | 48 |
| | 2 | | X | X | X | | | X | | | |
| | 3 | | X | X | X | | | | | | |
| | 4 | X | X | X | X | X | X | X | X | | X |
| | 5 | | | X | | | | | | | |
| | 6 | | X | X | X | X | | X | X | | X |
| | 8 | | X | X | X | | | X | X | X | |
| | 10 | | X | X | X | | | X | X | | |
| | 12 | | | X | X | | | X | X | | |

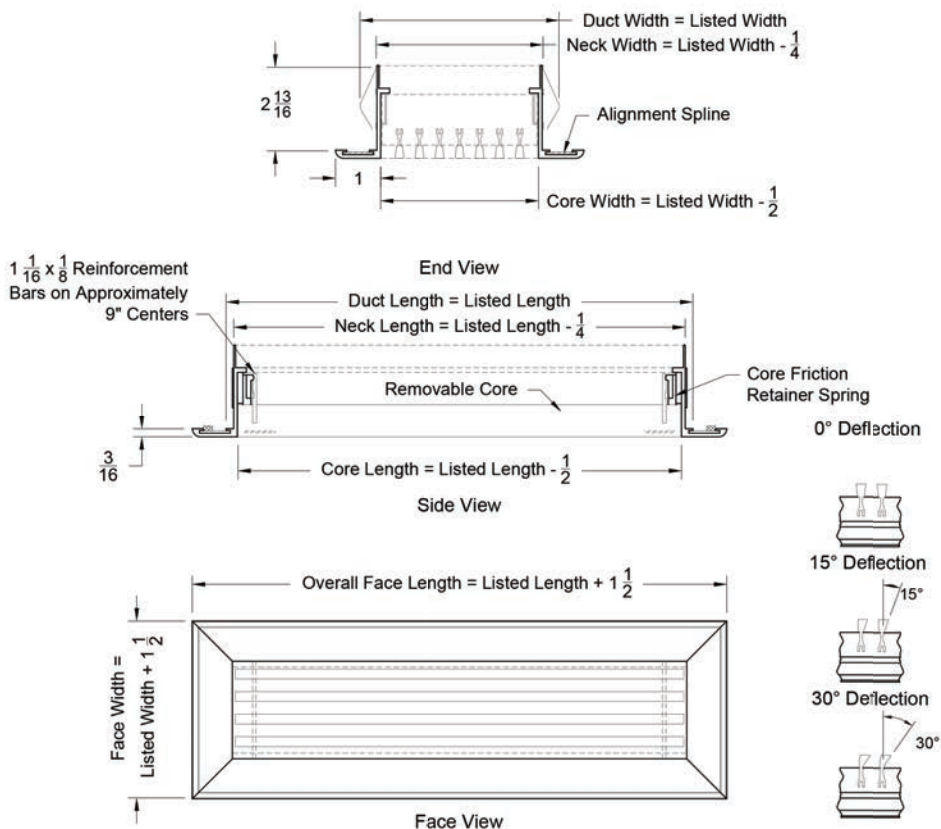

1510DB / 1510DW

Floor Supply Register



GRILLES | FLOOR SUPPLY

1510DB / 1510DW



1510DB



1510DW

MODEL

1510DB Brown Floor Supply Register

1510DW White Floor Supply Register

FEATURES

- Residential floor supply register
- Fixed 2-way air throw pattern
- Damper on back to open or close airflow
- Foot operated dial control
- Steel construction

SPECIAL ORDER OPTIONS


- Mounting holes




WEB SEARCH: 1510DB / 1510DW

| 1510DB | | Width | | | |
|--------|----|-------|---|---|---|
| Height | | 2 | 4 | 6 | 8 |
| | 6 | | X | | |
| | 8 | | X | X | X |
| | 10 | X | X | X | X |
| | 12 | X | X | X | X |
| | 14 | X | X | X | X |

| 1510DW | | Width | | | |
|--------|----|-------|---|---|---|
| Height | | 2 | 4 | 6 | 8 |
| | 6 | | X | | |
| | 8 | | X | X | X |
| | 10 | X | X | X | X |
| | 12 | X | X | X | X |
| | 14 | X | X | X | X |

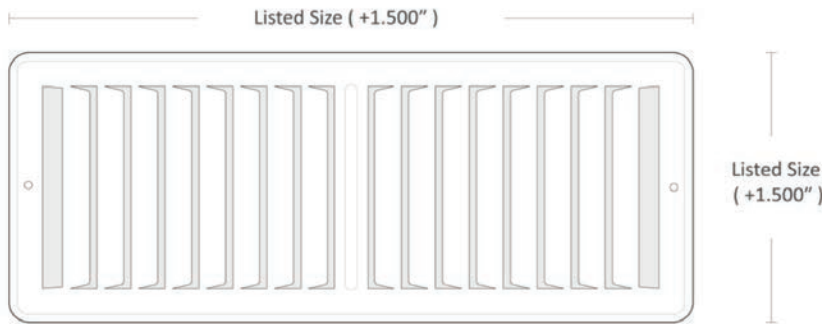

Multi-Shutter Damper

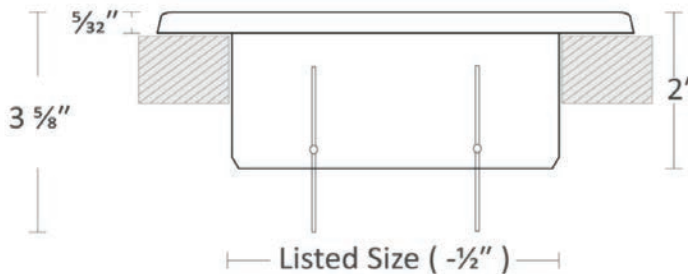

157MB / 157MW

Heavy Duty Floor Register



GRILLES | FLOOR SUPPLY

157MB / 157MW



157MB



157MW

MODEL

157MB Brown Heavy Duty Floor Register
157MW White Heavy Duty Floor Register

FEATURES


- Residential floor supply register
- Heavy duty
- Individually welded blades instead of a thin stamped face
- Foot operated dial control



WEB SEARCH: 157MB/157MW

| Height | 157MB Width | | | |
|--------|-------------|---|---|---|
| | | 2 | 4 | 6 |
| | 8 | | X | X |
| | 10 | X | X | X |
| | 12 | X | X | X |
| | 14 | X | X | X |

| Height | 157MW Width | | | |
|--------|-------------|---|---|---|
| | | 2 | 4 | 6 |
| | 8 | | X | X |
| | 10 | X | X | X |
| | 12 | X | X | X |
| | 14 | X | X | X |

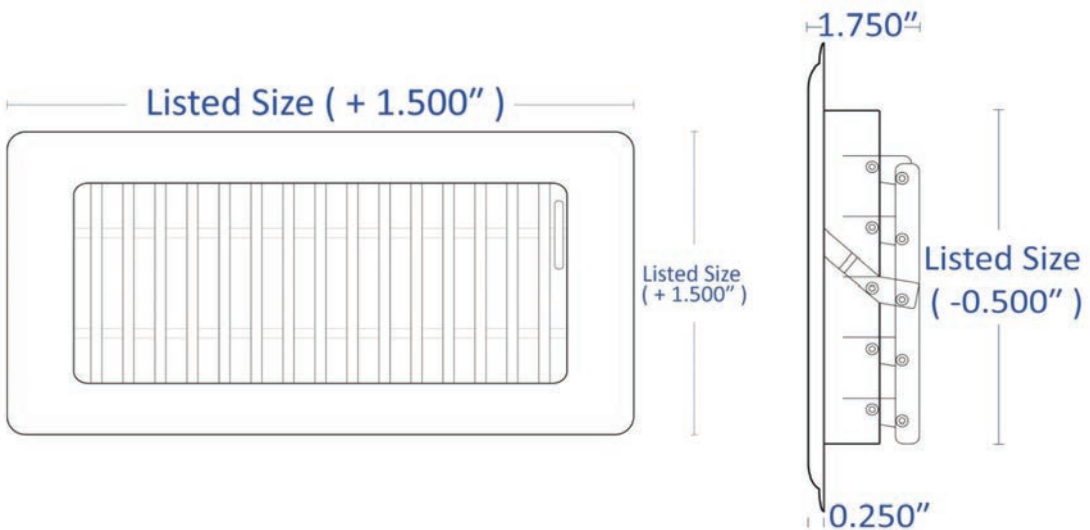

1510DXB / 1510DXW

Toe Kick Wall Register



GRILLES | FLOOR SUPPLY

1510DXB / 1510DXW



1510DXB



1510DXW

MODEL

1510DXB Brown Toe Kick Wall Register

1510DXW White Toe Kick Wall Register

FEATURES



- Steel construction
- Multi-angle fin setting
- Heavy gauge rolled fins
- Foot operated dial control for damper
- Mounting holes in face
- Brown & white finish



WEB SEARCH: 1510DXB/1510DXW

| 1510DXB | | Width | |
|---------|----|-------|---|
| Height | | 2 | 4 |
| | 8 | X | |
| | 10 | X | X |
| | 12 | X | X |
| | 14 | X | X |

| 1510DXW | | Width | |
|---------|----|-------|---|
| Height | | 2 | 4 |
| | 10 | X | X |
| | 12 | X | X |
| | 14 | X | |

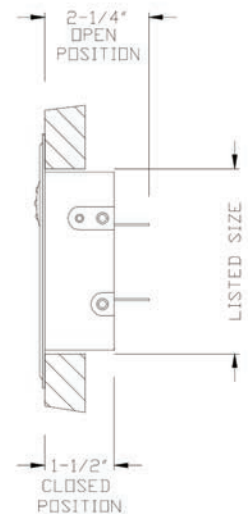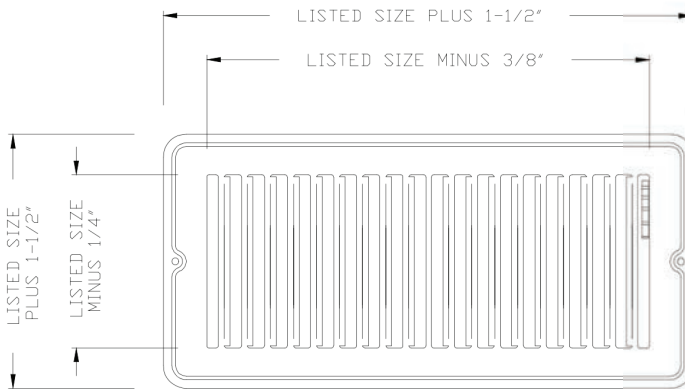

150TSB / 150TSW

Toe Kick Grille



GRILLES | FLOOR RETURN

150TSB / 150TSW



150TSB



150TSW

MODEL

150TSB Brown Toe Kick Grille

150TSW White Toe Kick Grille

FEATURES


- Steel construction
- Multi-angle fin setting
- Flat with no damper
- 2-way air throw pattern
- Brown and white finish



WEB SEARCH: 150TSB / 150TSW

| Height | 150TSB | | Width | | |
|--------|--------|---|-------|---|---|
| | | | 2 | 4 | 6 |
| | 8 | X | X | X | X |
| | 10 | X | X | X | X |
| | 12 | X | X | X | X |
| | 14 | X | X | X | X |

| Height | 150TSW | | Width | | |
|--------|--------|---|-------|---|---|
| | | | 2 | 4 | 6 |
| | 8 | X | X | X | X |
| | 10 | X | X | X | X |
| | 12 | X | X | X | X |
| | 14 | X | X | X | X |

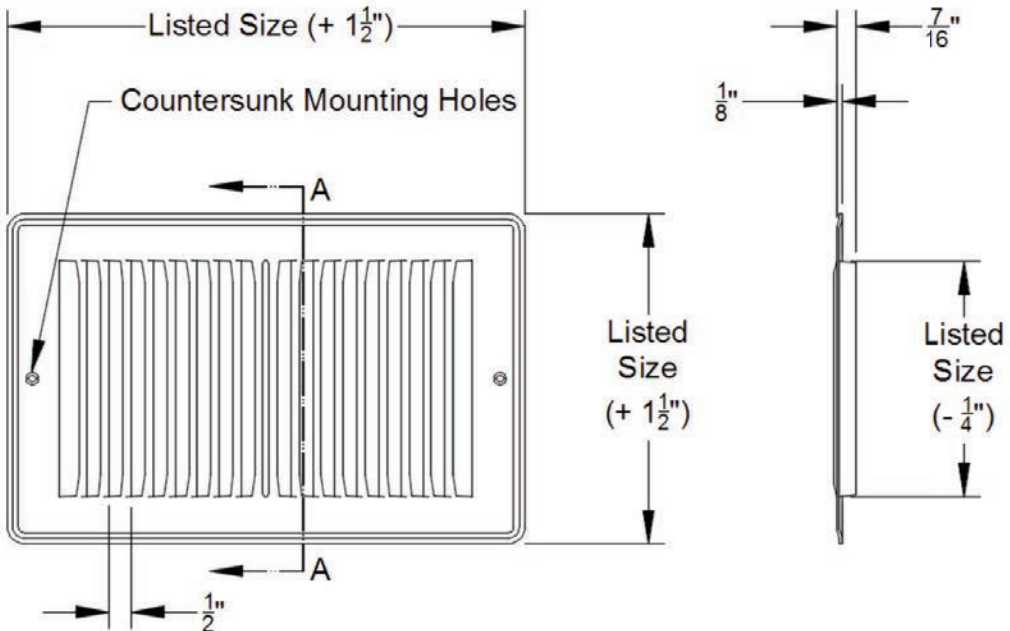

WOOD FLOOR REGISTERS

Unfinished Wood Floor Registers



GRILLES | WOOD

WOOD FLOOR REGISTERS




WMRD



WWRD



WPRD



WRRD

MODEL

WMRD Maple Wood Floor Register

WWRD White Oak Wood Floor Register

WPRD Yellow Pine Wood Floor Register

WRRD Red Oak Wood Floor Register

FEATURES

- High quality unfinished wood floor register
- Inset vents (surface mount) are designed with a solid, self rimming lip to conceal inexact cuts in your surface material.
- Easy slide damper
- 4 different species of wood to choose from

SPECIAL ORDER OPTIONS

- 30 different species of wood
- Different finishing options
- Box dampers



WEB SEARCH: WOOD FLOOR REGISTERS



WOOD FLOOR REGISTERS

Unfinished Wood Floor Registers

Sizes Available

For All Species

2X10

4X8

6X10

2X12

4X10

6X12

2X14

4X12

6X14

4X14

| Order Size (Duct Opening Inches) | Free Area (Square Inches) | Overall Dimensions |
|-------------------------------------|------------------------------|-----------------------|
| 2-1/2 x 10 | 9 | 3-15/16 x 11-7/16 |
| 2-1/2 x 12 | 11-1/4 | 3-15/16 x 13-7/16 |
| 2-1/2 x 14 | 13-1/2 | 3-15/16 x 15-7/16 |
| 4 x 8 | 11 | 5-7/16 x 9-7/16 |
| 4 x 10 | 15 | 5-7/16 x 11-7/16 |
| 4 x 12 | 18-1/2 | 5-7/16 x 13-7/16 |
| 4 x 14 | 22 | 5-7/16 x 15-7/16 |
| 6 x 10 | 24-3/4 | 7-7/16 x 11-7/16 |
| 6 x 12 | 31 | 7-7/16 x 13-7/16 |
| 6 x 14 | 37 | 7-7/16 x 15-7/16 |

WOOD FLOOR RETURNS

Unfinished Wood Flush Return Grilles



GRILLES | WOOD

WOOD FLOOR RETURNS



WRF



WRFFD

MODEL

WRF Red Oak Single Piece Flush Floor Grille

WRFFD Red Oak Flush Floor Register with Damper

FEATURES

- Slim, trim, flush styling with the cleanest look possible
- Sets flat on the subfloor
- Frame is set permanently while the vent is removable to permit cleaning of the duct throat
- Delicate looking for tough
- Easy slide damper
- Stocked in red oak
- Can order different species of wood

SPECIAL ORDER OPTIONS

- 30 different species of wood
- Different finishing options
- Box dampers



WEB SEARCH: WOOD FLOOR RETURNS



WOOD FLOOR RETURNS

Unfinished Wood Floor Registers

Sizes Available

For All Species

2X10

4X10

6X10

2X12

4X12

6X12

2X14

4X14

6X14

| Order Size (Duct Opening Inches) | Free Area (Square Inches) | Overall Dimensions With Frame Model | 45° Mitered Frame |
|-------------------------------------|------------------------------|--|-------------------|
| 2-1/2 x 10 | 9 | 4-1/2 x 11-13/16 | 5 x 11-13/16 |
| 2-1/2 x 12 | 11-1/4 | 4-1/2 x 14-1/8 | 5 x 14-1/8 |
| 2-1/2 x 14 | 13-1/2 | 4-1/2 x 16 | 5 x 16 |
| 4x10 | 15 | 6-3/4 x 12-1/4 | 6-3/4 x 12-1/4 |
| 4x12 | 18-1/4 | 6-3/4 x 14-1/2 | 6-3/4 x 14-1/2 |
| 4x14 | 22 | 6-3/4 x 16-1/2 | 6-3/4 x 16-1/2 |
| 6x10 | 24-3/4 | 9 x 12-1/4 | 9 x 12-1/4 |
| 6x12 | 31 | 9 x 14-1/2 | 9 x 14-1/4 |
| 6x14 | 37 | 9 x 16-1/2 | 9 x 16-1/4 |


406 / 462

Short Baseboards



GRILLES | BASEBOARD

406 / 462 / 464



406B



406W



462B



462W

MODEL

406B Baseboard Register
406W Baseboard Register
462B Baseboard Register
462W Baseboard Register

FEATURES

- Standard baseboard register
- Available in both brown and white
- Sizes in 15", 18", 24"
- Includes damper to open or close off airflow
- 4.5" tall, project out 2.75" at bottom
- Snap in face removes for easy installation


NO SPECIAL OR CUSTOM SIZES AVAILABLE



WEB SEARCH: 406 / 462 / 464

MODEL

464B Baseboard Register
464W Baseboard Register

**464B****FEATURES**

- Standard baseboard register
- Available in both brown and white
 - 48" Length
- Includes damper to open or close off airflow
 - 4.5" tall, project out 2.75" at bottom
- Snap in face removes for easy installation

**464W**

NO SPECIAL OR CUSTOM SIZES AVAILABLE

655 / 658

Tall Baseboards



GRILLES | BASEBOARD

655W / 658W



655W



658W

MODEL

655W Tall Baseboard Register

658W Tall Baseboard Return

FEATURES

- Available in both supply and return
- 655W and 658W have triangular profile.
- Projects .875" from wall at the top and 3.75" at the bottom.
- Steel construction
- White finish

NO SPECIAL OR CUSTOM SIZES AVAILABLE



WEB SEARCH: 655W / 658W

MODEL

655W Tall Baseboard Register

658W Tall Baseboard Return

FEATURES

- Available in both supply and return
- 657W and 664W have flat profiles and project .75" on all sides
 - Steel construction
 - White finish

NO SPECIAL OR CUSTOM SIZES AVAILABLE**657W****664W****WEB SEARCH: 657W / 664W**

47006W

Steel Two Cone T-Bar Lay-In



GRILLES | T-BAR LAY-IN

47006W



47006W 24X24



47006W 12X12

MODEL

47006W Steel Two Cone Lay-in Diffuser

FEATURES

- Steel face
- 2 Cone diffuser
- Ceiling application
- 24x24 lay-in mounting style
 - Neck sizes from 6" - 14"
- 12x12 lay-in mounting style
 - Neck sizes 6" - 8"
- White finish

SPECIAL ORDER OPTIONS

- Black or aluminum finish
- Butterfly, radial, or opposed blade damper
- Plaster frames
- Sectoring baffles
- Adjustable pattern blades
- R6 fiberglass back



WEB SEARCH: 47006W

47006W

24x24

6"

8"

10"

12"



14"

47006W

12x12

6"

8"

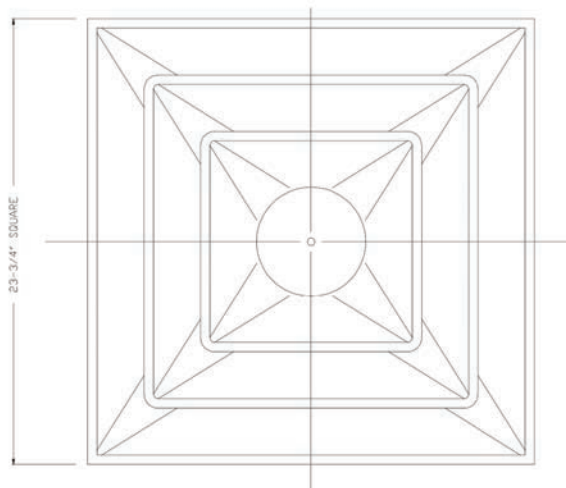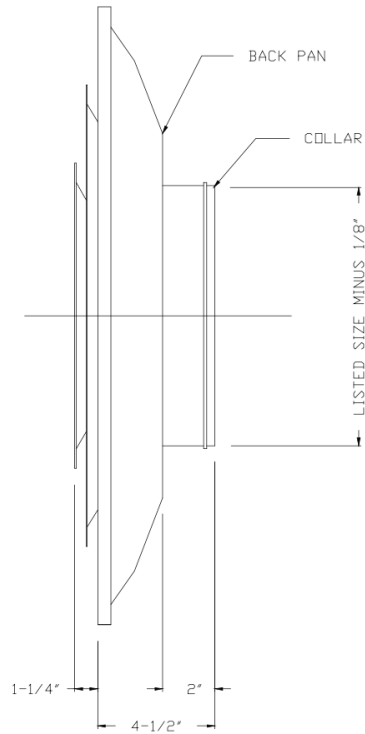

47506W

Plaque Lay-in Diffuser



GRILLES | T-BAR LAY-IN

47506W



47506W

MODEL

47506W Plaque Lay-in Diffuser

FEATURES

- Steel face
- Plaque style diffuser
- Ceiling application
- Lay-in mounting style
- Neck sizes from 6" - 14"
- White finish



WEB SEARCH: 47506W

45706W

24x24

6"

8"

10"

12"

14"

47506W



12x12

6"

8"

47506WR6

24x24 with
R6 Fiberglass back

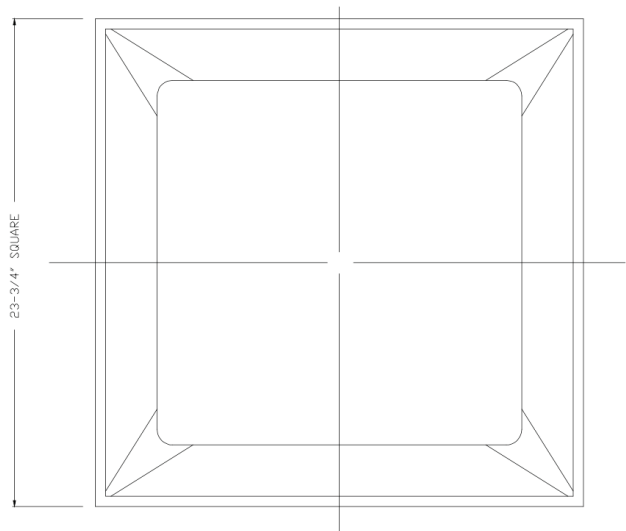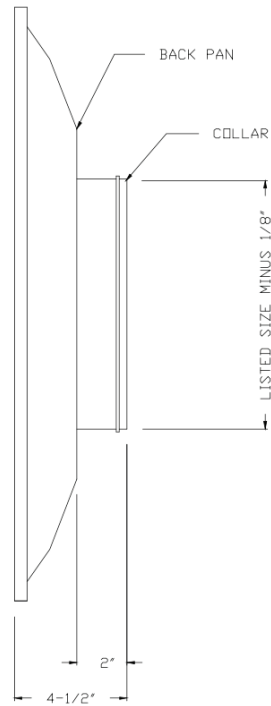


58006W

Steel Three Cone T-Bar Lay-in



GRILLES | T-BAR LAY-IN



58006W

58006W

MODEL

58006W Steel Three Cone T-Bar Lay-in

FEATURES

- Steel face
- Insulated on back with R6 insulation
- 3 Cone fixed design
- Ceiling application
- Neck sizes from 6" - 14"
- White finish



WEB SEARCH: 58006W

58006W

24x24


6"

8"

10"

12"


14"

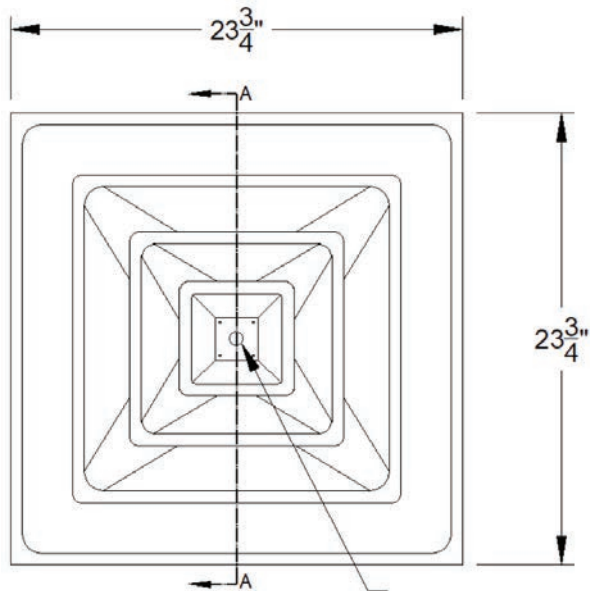

Removable plastic plug for optional damper adjustment

58006WR6

24x24 with
R6 Fiberglass back

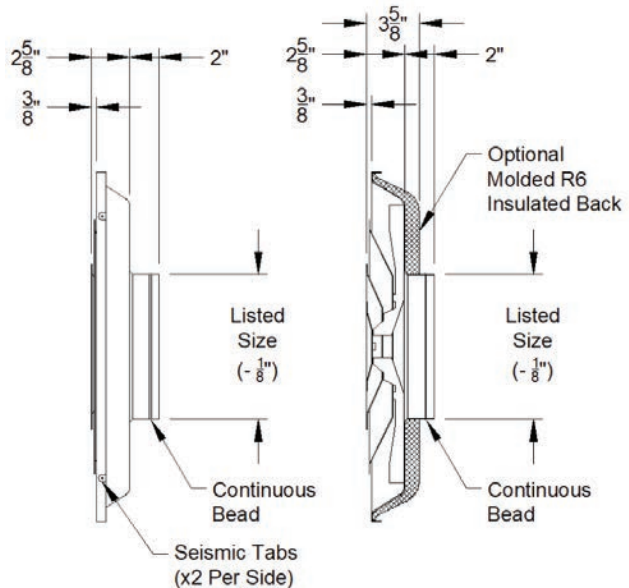


76006W

Perforated Lay-in with 4-Way Adjustable Blades



GRILLES | T-BAR LAY-IN

76006W



76006W

MODEL

76006W Perforated Lay-in Diffuser with 4-Way Adjustable Curved Blades

FEATURES

- Steel construction
- White finish
- Perforated face
- Ceiling application
- Removable face features concealed hinges and latches.
- 4-Way adjustable curved blades
- Neck sizes 6" - 14"

SPECIAL ORDER OPTIONS

- Black or aluminum finish
- Plaster frames for sheet rock ceilings
- Butterfly, radial, or opposed blade damper
- Square neck option (7650)
- Aluminum construction
- 1W, 2W, 3W patterns



WEB SEARCH: 76006W

76006W

24x24



6"

8"

10"

12"

14"

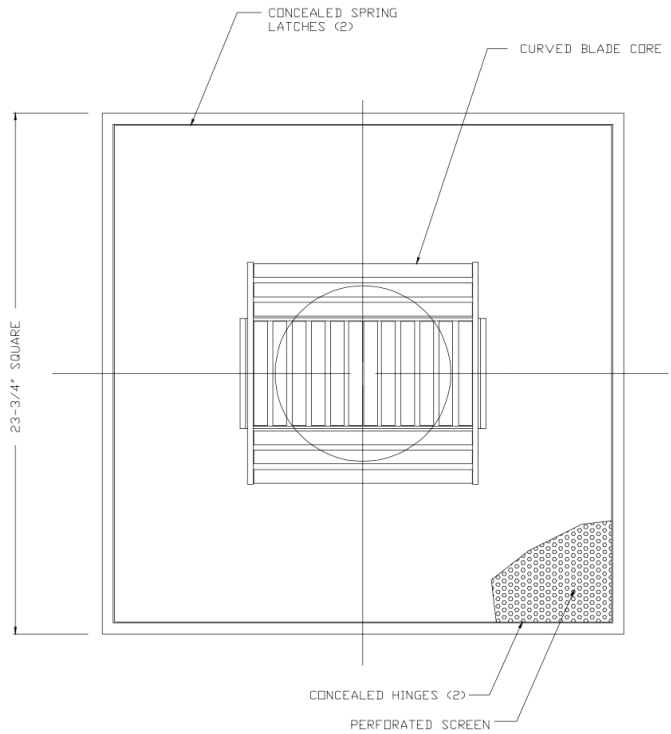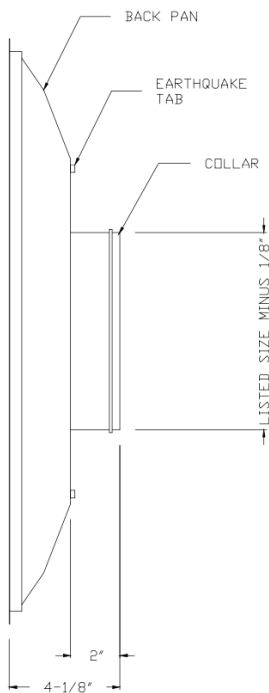


AMLSTRC

Plastic Two Cone T-Bar Lay-in



GRILLES | T-BAR LAY-IN

AMLSTRCB / AMLSTRCW



AMLSTRCB



AMLSTRCW

MODEL

AMLSTRCB Black Plastic T-Bar Lay-in
AMLSTRCW White Plastic T-Bar Lay-in

FEATURES

- Plastic construction
- Ideal for restaurants, hospitals, offices, and clean environments
- Does not rust
- Does not sweat
- 2 Cone face
- Ceiling application


SPECIAL ORDER OPTIONS

- R6 Fiberglass back
- Plaster frame
- Plastic air flow diverter



WEB SEARCH: AMLSTRCB / AMLSTRCW

| AMLSTRCB | AMLSTRCW |
|----------|----------|
| 24x24 | 24x24 |
| 6" | 6" |
| 8" | 8" |
| 10" | 10" |
| 12" | 12" |
| 14" | 14" |

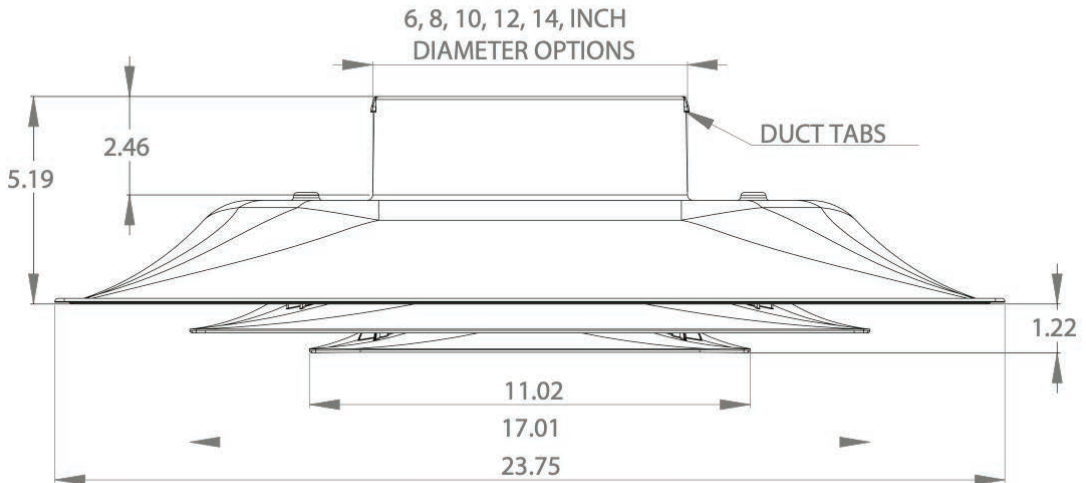


AL57006W

Aluminum Two Cone T-Bar Lay-in



GRILLES | T-BAR LAY-IN

AL57006W



AL57006W

MODEL

AL57006W Aluminum Two Cone T-Bar Lay-in

FEATURES

- Aluminum construction
- 2 Cone face
- Ceiling application
- White finish
- Neck sizes 6" - 14"

SPECIAL ORDER OPTIONS

- Aluminum construction
- Plaster frames
- R6 fiberglass back
- Butterfly, radial, or opposed blade damper
- Plastic air flow diverter



WEB SEARCH: AL57006W

AL57006W

24x24

6"


8"

10"

12"

14"

5700-6 AL (Aluminum -Lay in T-Bar - 24x24)

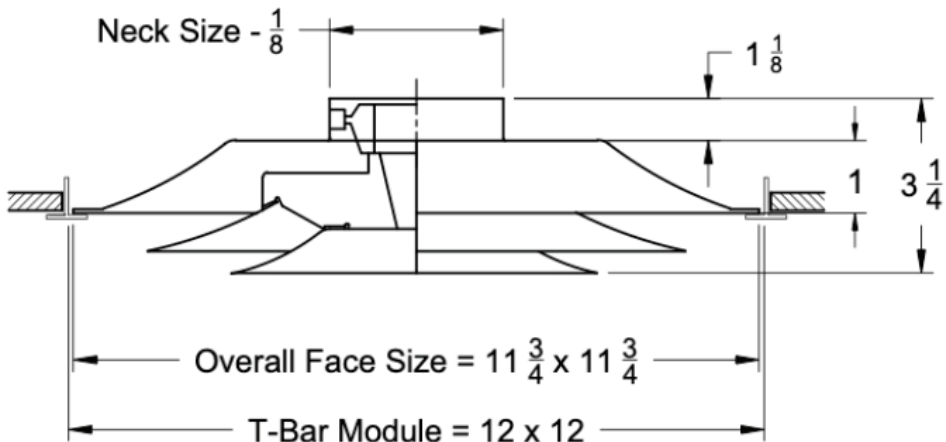

Available Neck Sizes 6 & 8


73006W

Perforated Lay-in with R6 Ductboard Back



GRILLES | T-BAR LAY-IN

73006W



73006W

MODEL

73006W Perforated Lay-in w/ R6 Ductboard Back

FEATURES

- Steel construction
- Perforated face
- Ceiling application
- R6 molded fiberglass back
- Neck sizes 6" - 14"

SPECIAL ORDER OPTIONS

- Ductboard collars
- Aluminum construction
- Plaster frames
- Butterfly, radial, or opposed blade damper
- Face only option




WEB SEARCH: 73006W

73006W


24x24 with
R6 Ductboard Back

7300-6 (Steel Fixed Face - Lay in T-Bar Supply)

7300-6 AF (Aluminum Fixed Face - Lay in T-Bar Supply)

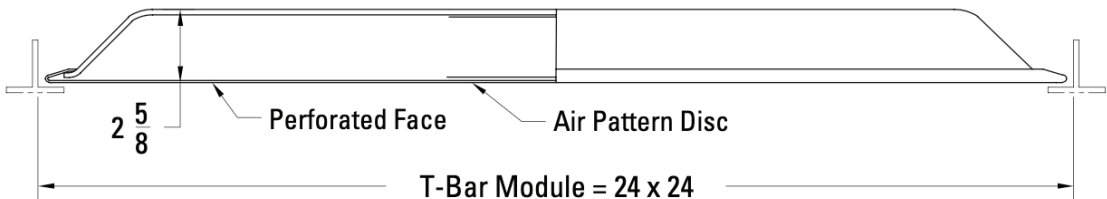

Back View (All Models)

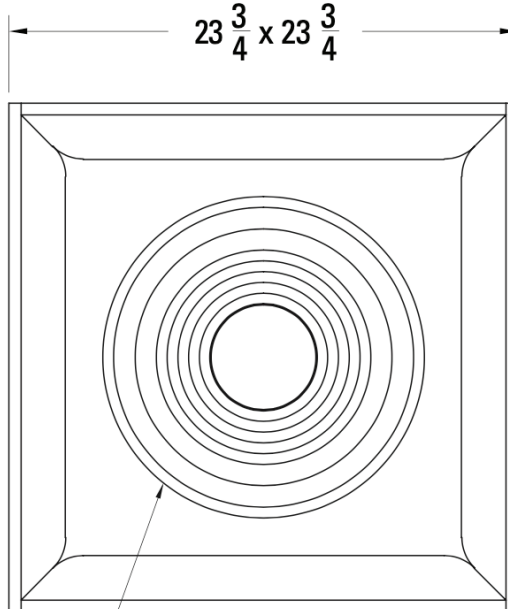

Plenum Scored For
5, 6, 7, 8, 9, 10, 12, 14 & 15
Inch Diameters


75006W / 75006ALW

Perforated Lay-in with 4 Adjustable Pattern Deflectors



GRILLES | T-BAR LAY-IN

75006W / 75006ALW



75006W
75006ALW

MODEL

75006W Perforated Lay-in Diffuser with 4 Adjustable Pattern Deflectors

75006ALW Perforated Lay-in Diffuser with 4 Adjustable Pattern Deflectors

FEATURES

- Steel construction - 75006W
- Aluminum construction - AL75006W
- Perforated face
- Ceiling application
- Removable face features concealed hinges and latches
- 4 Adjustable pattern deflectors on the back of the face panel
- Neck sizes 6" - 14"

SPECIAL ORDER OPTIONS

- Black or aluminum finish
- Plaster frames
- Butterfly, radial, or opposed blade damper



WEB SEARCH: 75006W | 75006ALW

75006W

24x24

6"

8"

10"

12"

14"

75006ALW

24x24

6"

8"

10"

12"

14"


75006W

12x12


6"

8"

7500-6AL (Aluminum Backpan & Face - Lay in T-Bar - 24x24)


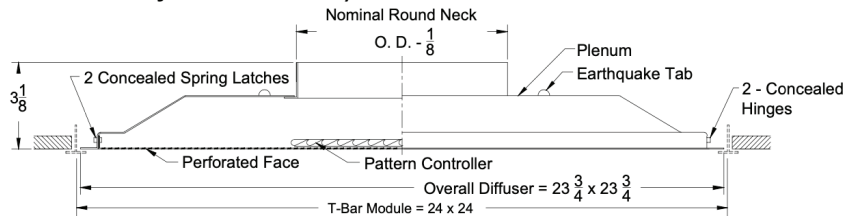


7500-6AL (Aluminum Backpan & Aluminum Face - Lay in T-Bar - 12x12)

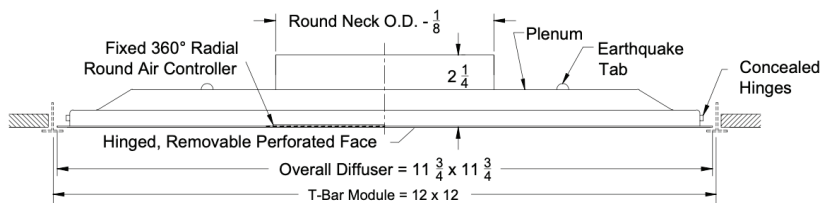

Air Deflection Patterns Obtained By Adjusting Air Pattern Controllers

Fixed 360° Radial Round Air Controller

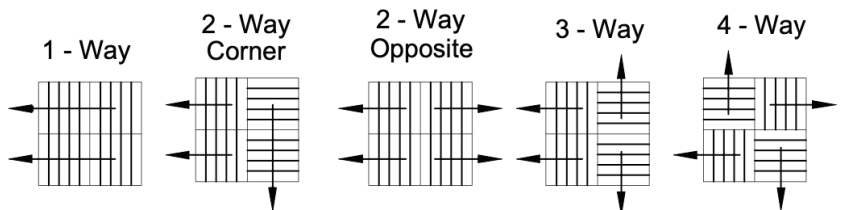


SPRTB

Perforated Face Only



GRILLES | T-BAR LAY-IN

SPRTB



SPRTB

MODEL

SPRTB Perforated Face Only

FEATURES

- Steel construction
- Perforated face only
- Ceiling application
- Open back
- 24x24 lay-in

SPECIAL ORDER OPTIONS



- Plaster frames
- Ductboard box
- Aluminum construction
- 12x12, 24x12, 36x24, and 48X24 sizes



WEB SEARCH: SPRTB

SPRTB
24X24
Actual Face Size
23 3/4 x 23 3/4

PRTB-6 (Aluminum) and SPRTB-6 (Steel) - (Lay in T-Bar)

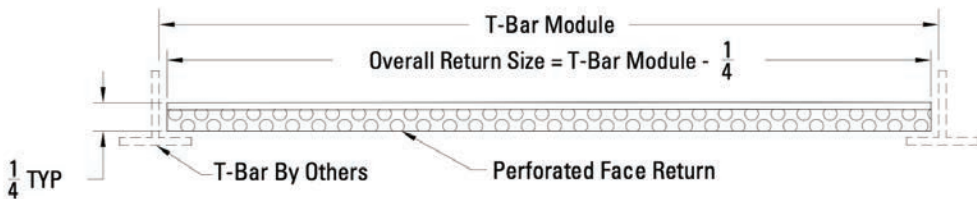

| T-Bar Spacing | Actual Face Size |
|---------------|------------------|
| | PRTB/SPRTB-6 |
| 12 x 12 | 11 3/4 x 11 3/4 |
| 24 x 12 | 23 3/4 x 11 3/4 |
| 24 x 24 | 23 3/4 x 23 3/4 |
| 36 x 24 | 35 3/4 x 23 3/4 |
| 48 x 12 | 47 3/4 x 11 3/4 |
| 48 x 24 | 47 3/4 x 23 3/4 |


5500 SERIES

1, 2, 3, 4, 2 Way Corner Blow Lay-in Diffusers



GRILLES | T-BAR LAY-IN


55001W / 55002W / 55003W / 55004W / 55005CW



55001W



55002W



55003W



55004W



55005CW

MODEL

55001W Steel Lay-in Diffuser
55002W Steel Lay-in Diffuser
55003W Steel Lay-in Diffuser
55004W Steel Lay-in Diffuser
55005CW Steel Lay-in Diffuser

FEATURES



- 24x24 T-Bar lay-in
- High volume 1 way, 2 way, 3 way, 4 way, and 2 way corner blow face designs
- Steel construction
- R-6 molded fiberglass back
- Pre-scored to accept spin-in / ductboard collars from 6" to 16" size
- White finish

SPECIAL ORDER OPTIONS


- Black finish
- Metal square to round instead of R6 back
- Plaster frame



WEB SEARCH: 5500 SERIES

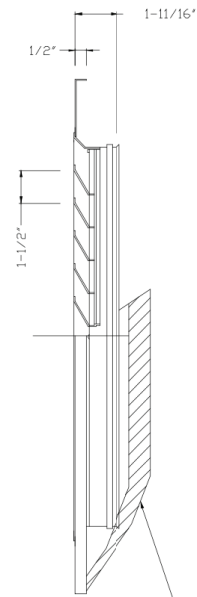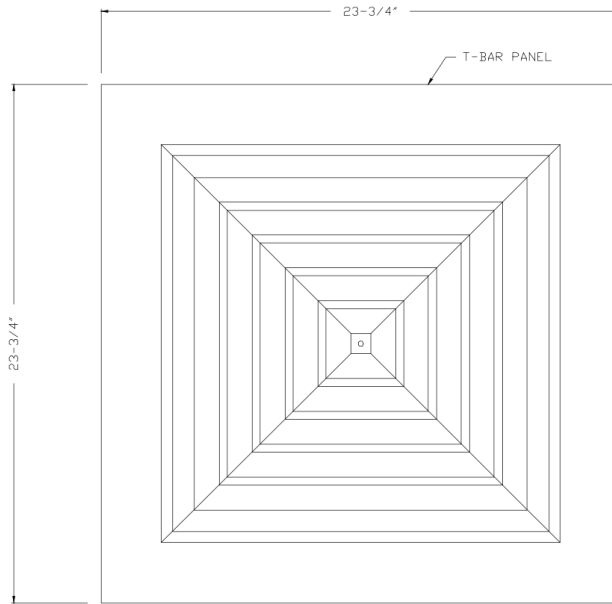

R6 Molded Fiberglass Back Panel

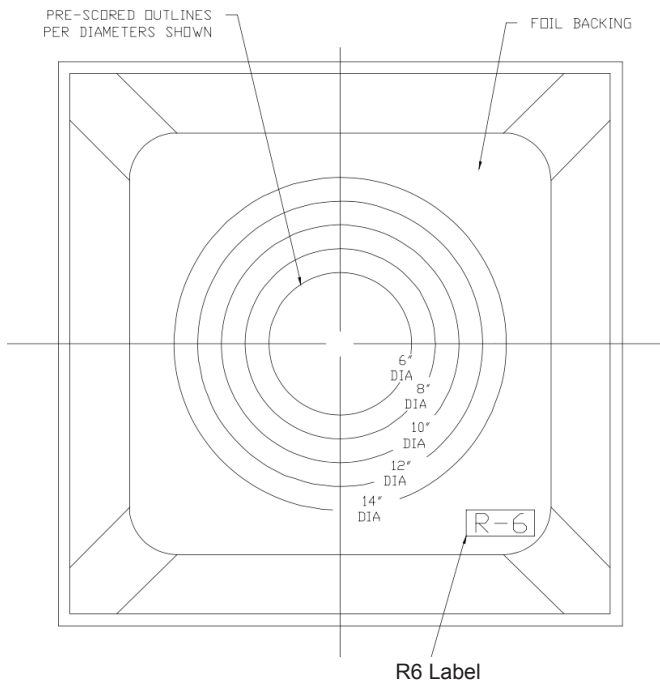

*55004W shown in drawing.
Keep in mind when ordering
different throw patterns

ECBXTW

Evaporative Cooler Box Diffuser



GRILLES | T-BAR LAY-IN

ECBXTW



ECBXTW

MODEL

ECBXTW Lay-In Diffuser



FEATURES

- 24x24 Lay-in evaporative cooler box diffuser
- 4 way throw pattern
- Individually adjustable dampers on all 4 sides
- 6.25" Drop from ceiling
- Steel construction
- White finish



WEB SEARCH: ECBXTW

ECBXTW 24X24

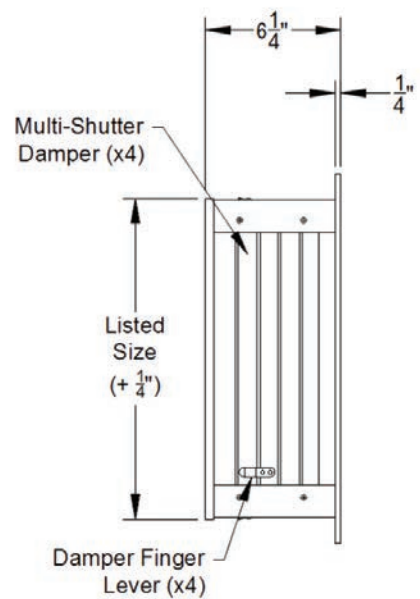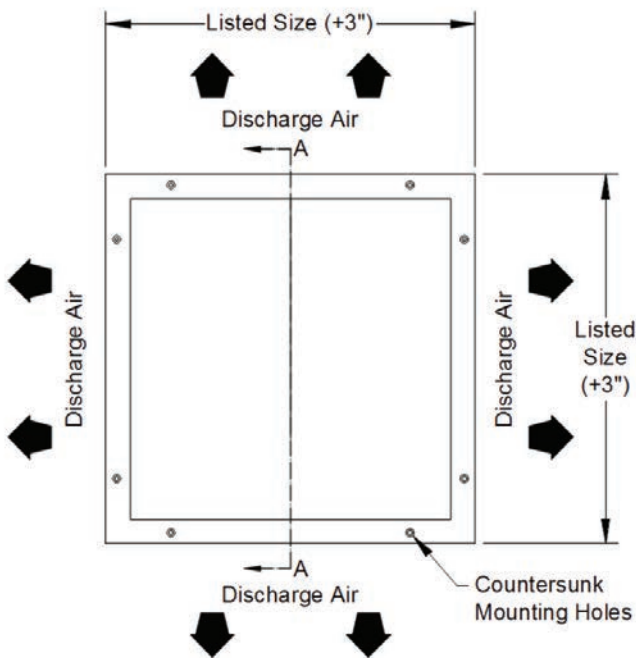

PLQ

Plaque Lay-In Diffuser



GRILLES | T-BAR LAY-IN

PLQ



PLQ

MODEL

PLQ Plaque Lay-In Diffuser (20x20)

FEATURES


- Square faceplate made of one-piece, nonfolded metal with rounded corners to give the diffuser a clean appearance
- Single faceplate allows reduced pressure drops and a quiet sound profile
- Faceplate is held in place by hooks that lock into the backpan
- 20x20 Overall size
- Steel construction
- White finish
- Great for wood truss ceilings when paired with a plaster frame

SPECIAL ORDER OPTIONS


- 12x12 and 24x24 panel size
- Aluminum construction
- Black or aluminum finish
- Butterfly, radial, or opposed blade damper




WEB SEARCH: PLQ

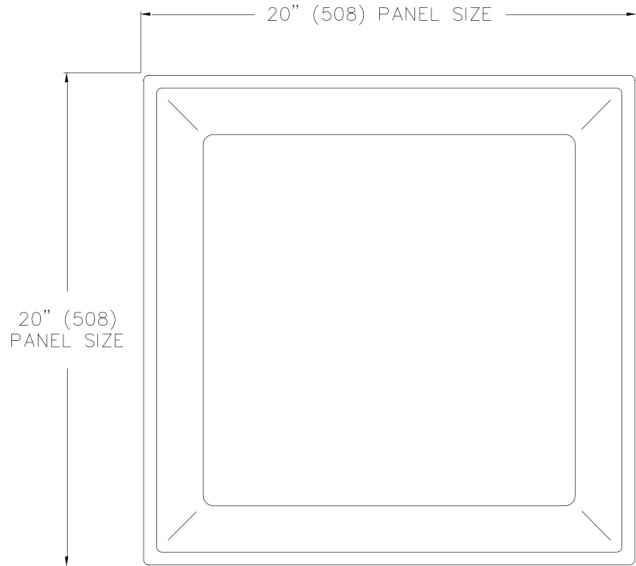

FACE VIEW

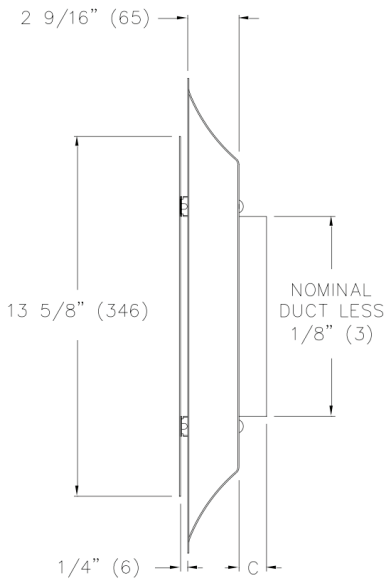

SIDE VIEW



**□ FRAME 23
LAY-IN T-BAR**

1450W

20x20 Steel 2 Cone Lay-in Diffuser



GRILLES | T-BAR LAY-IN

1450W



1450W

MODEL

1450W 20x20 Steel 2-Cone Lay-in Diffuser

FEATURES

- Square face, 2 cone, round neck ceiling diffuser
- Constructed with one piece stamped cones
- At typical flow rates, isothermal throws of 9-16 feet make this diffuser ideal for mounting centrally in many spaces while providing high mixing rates in space
- Paired with a plaster frame, this diffuser is an excellent option for wood truss ceilings with sheet rock
- 20x20 overall size
- Steel construction
- White finish

SPECIAL ORDER OPTIONS

- Black or aluminum finish
- Aluminum construction
- Plaster frame
- Butterfly, radial, or opposed blade damper



WEB SEARCH: 1450W

1450W



20x20

6"

8"

10"

Face View

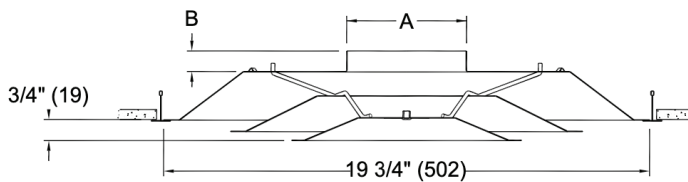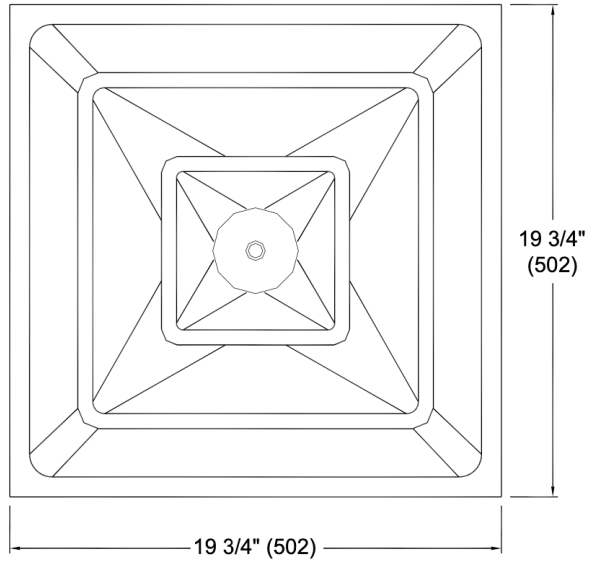

Side View

| NOMINAL NECK SIZE | A | B |
|------------------------------|---------------------|----------------|
| 6 | 5 7/8" (149) | 1" (25) |
| 8 | 7 7/8" (200) | 1" (25) |
| 10 | 9 7/8" (251) | 1" (25) |

ACCESSORIES

Register / Grille / Floor Vent Accessories



GRILLES | ACCESSORIES

REGISTER / GRILLE ACCESSORIES



OBD
Opposed Blade Damper



DF51
Clear Plastic Deflector



155B
Butterfly Damper



156R
Mounting Ring

FLOOR VENT ACCESSORIES




DF50
Clear Plastic Deflector



DF99
Clear Plastic Deflector

SQUARE TO ROUND



PSTR
Square to Round



WEB SEARCH: ACCESSORIES

T-BAR LAY-IN ACCESSORIES



BDS
Round Butterfly Damper




RSD
Radial Damper



R6 Ductboard Box
22x22




R6 Ductboard Box
22x12



TBPFW
T-Bar Plaster Frame




FGBR6
R6 Fiberglass Back



BAF1
Sectoring Baffle




Snap 58
Converter Cone

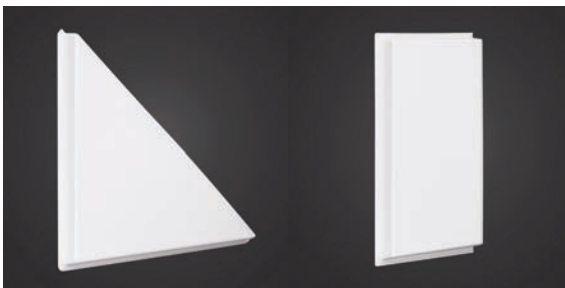

PEADIVCW
Corner Lay-in Diverter
Available in white & black

PEADIVW
Lay-in Diverter
Available in white & black



BO1W
Blank Off

FDHA

Type A Static Fire Damper



DAMPERS | FIRE DAMPERS

FDHA



FDHA

MODEL

FDHA Type A Static Fire Damper

FEATURES

- Type A horizontal static fire damper
- Roll formed galvanized steel frame and blades
- Stainless steel closure spring
- Actual size is 1/4" less than the size ordered
- UL-listed 165° F fusible link
- Meets UL 555 & NFPA requirements
- 1.5 hour rated for up to 3 hour walls

SPECIAL ORDER OPTIONS

- 3 hour rated
- Sleeves
- Offset sleeves
- Mounting angles
- Grille mounted dampers




WEB SEARCH: FDHA

| Height | FDHA Width | | | | | | | | | | | | | |
|--------|------------|---|----|----|----|----|----|----|----|----|----|----|----|----|
| | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 36 |
| 4 | X | X | X | X | X | X | X | X | | X | X | | X | |
| 6 | X | X | X | X | X | X | X | X | X | X | | | X | |
| 8 | | X | X | X | X | X | X | X | X | X | | | X | |
| 10 | | | X | X | X | X | X | X | | X | | X | X | X |
| 12 | | | | X | X | X | X | X | X | X | | | X | X |
| 14 | | | | | X | X | X | X | | X | | | X | X |
| 16 | | | | | | X | X | X | | X | X | | X | X |
| 18 | | | | X | | | X | X | X | X | X | | X | X |
| 20 | | | | | X | | | X | | X | | | X | |
| 22 | | | | | | | | | X | X | | | X | |
| 24 | | | | X | X | | | | | | | | X | |
| 30 | | | | X | | | | | | | | | X | |
| 36 | | | | | | | | | | | | | | X |

Stainless Steel
Closure Spring

Access Door
Located This Side

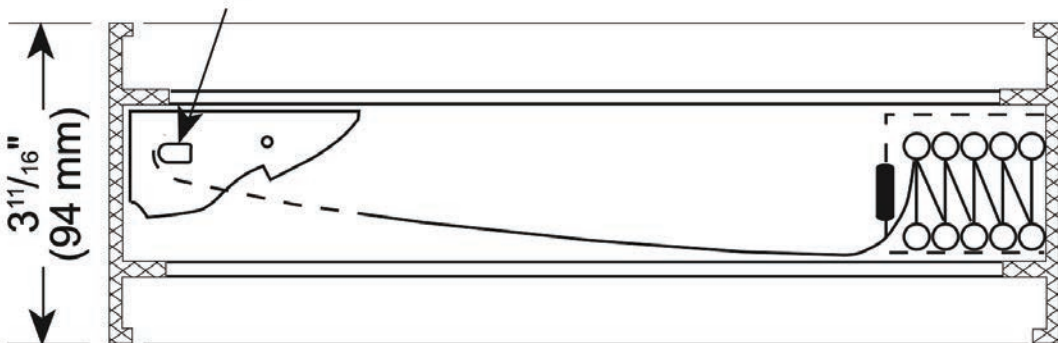



FDHC

MODEL

FDHC Type C Fire Damper

FEATURES

- Type C horizontal fire damper
- Roll formed galvanized steel frame and blades
- Square to round connections
- Stainless steel closure spring
- Actual size is 1/4" less than the size ordered
- UL-listed 165° F fusible link
- Meets UL 555 & NFPA requirements
- 1.5 hour rated for up to three hour walls

SPECIAL ORDER OPTIONS


- Grillmount transitions
- Welded or integral sleeve options
- Dynamic
- Mounting angles
- Offset sleeves
- 3 hour wall options



WEB SEARCH: FDHC

SIZES AVAILABLE

| | |
|-----|-----|
| 4" | 14" |
| 6" | 16" |
| 8" | 18" |
| 9" | 20" |
| 10" | 22" |
| 12" | 24" |

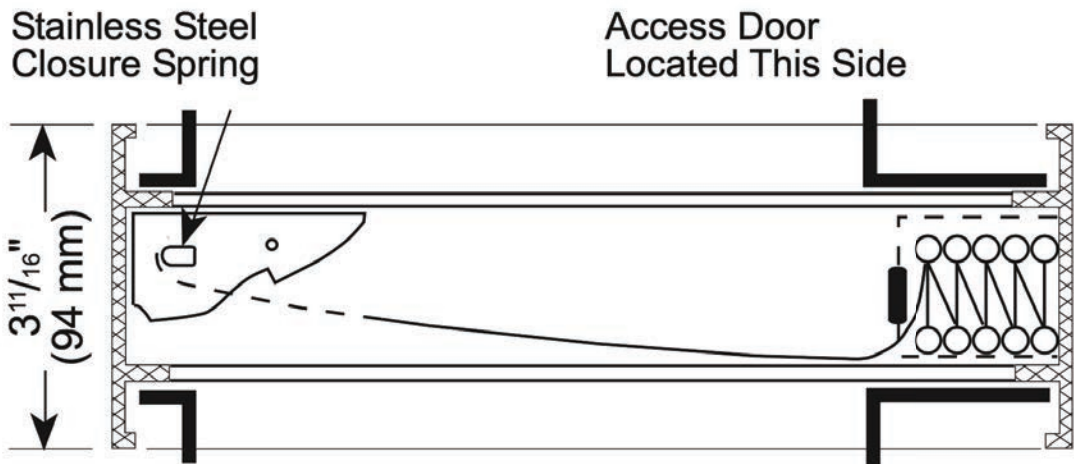



FDAHS

MODEL

FDAHS Type A Static Fire Damper with 12" Sleeve

FEATURES

- Type C horizontal fire damper
- Roll formed galvanized steel frame and blades
- This model includes angles and a 12" sleeve
- Stainless steel closure spring
- Actual size is 1/4" less than the size ordered
- UL-listed 165° F fusible link
- Meets UL 555 & NFPA requirements
- 1.5 hour rated


SPECIAL ORDER OPTIONS


- Custom sleeve lengths
- Custom sleeve gauges
- Offset sleeve
- 3 hr damper rating
- Round transitions
- Type B (out of airstream blade)
- Dynamic rated damper



WEB SEARCH: FDAHS

| FDAHS | | | | | Width | | | | | | | | | | | | | |
|--------|----|---|----|----|-------|----|----|----|----|----|----|----|----|----|----|----|----|---|
| Height | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 34 | 36 | 48 | |
| | 4 | | | X | X | | | | | | | | | | | | | |
| | 6 | X | X | X | X | X | | X | | | X | | | | | | X | |
| | 8 | | X | X | X | X | X | X | | X | X | | X | | | | | |
| | 10 | | | X | X | X | X | X | X | X | X | X | X | | | | | |
| | 12 | | | | X | X | X | X | X | X | X | X | X | X | | X | | |
| | 14 | | | | | X | X | X | X | X | X | X | X | | X | X | | |
| | 16 | | | | | X | X | X | X | | X | X | X | X | | | | |
| | 18 | | | | | X | | X | X | | X | | | X | | | X | X |
| | 20 | | | | | X | | | X | | X | | | X | | | | |
| | 22 | | | | | X | | | | X | | X | | | | | | |
| | 24 | | | | | X | | X | X | | X | | | X | | | X | |
| 30 | | | | | | | | | | | | | | | | | X | |

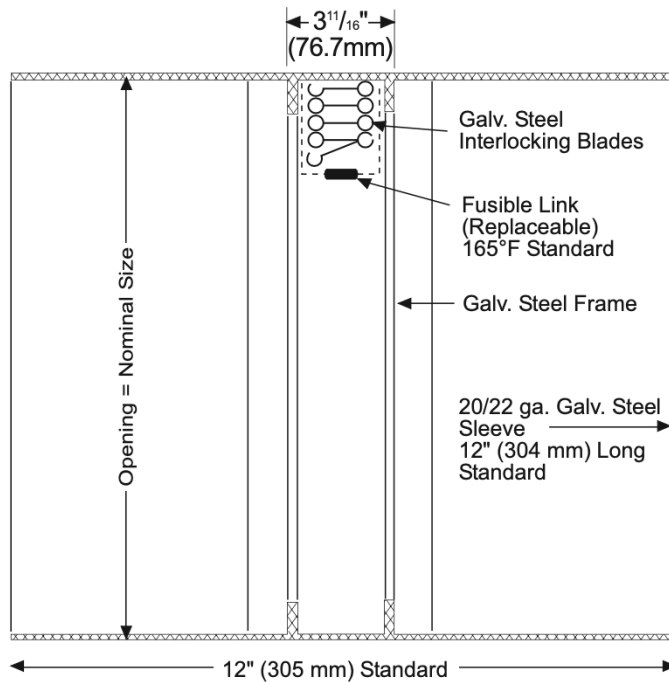



FDCHS

MODEL

FDHCHS Type C Static Fire Damper with 12" Sleeve

FEATURES

- Type C horizontal fire damper
- Roll formed galvanized steel frame and blades
- Square to round connections
- This model includes angles and a 20 gauge 12" sleeve
- Stainless steel closure spring
- Actual size is 1/4" less than the size ordered
- UL-listed 165° F fusible link
- Meets UL 555 & NFPA requirements
- 1.5 hour rated for up to 3 hour walls

SPECIAL ORDER OPTIONS


- Custom sleeve lengths
- Custom sleeve gauges
- 3 hour damper rating
- Dynamic rated damper



WEB SEARCH: FDCHS

SIZES AVAILABLE

| | |
|-----|-----|
| 4" | 12" |
| 5" | 14" |
| 6" | 16" |
| 7" | 18" |
| 8" | 20" |
| 9" | 22" |
| 10" | 24" |

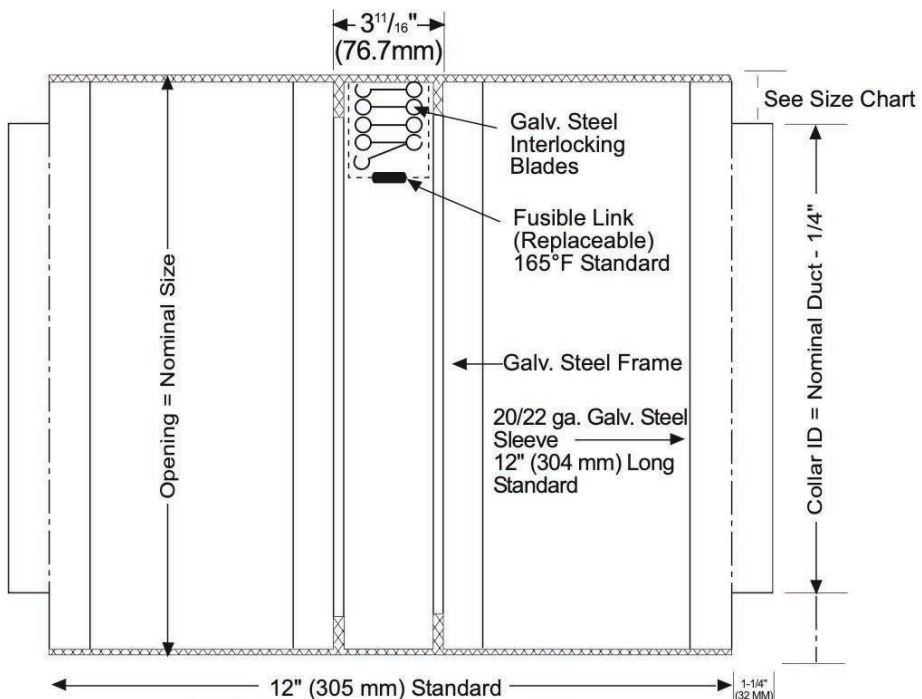

CDRD

Ceiling Radiation Damper



DAMPERS | RADIATION DAMPERS

CDRD



CDRD

MODEL

CDRD Ceiling Radiation Damper

FEATURES

- Round ceiling radiation damper
- Frame is made of 24 gauge galvanized steel
- Blades are made of 22 gauge galvanized steel
- Includes a non-asbestos, ceramic thermal blanked with a corrosion resistant steel spring
- Mill finish
- UL555C ceiling rating

SPECIAL ORDER OPTIONS

- Sleeves
- Volume dampers



WEB SEARCH: CDRD

SIZES AVAILABLE

4"

5"

6"

7"

8"

9"

10"


12"

14"

16"

18"

20"

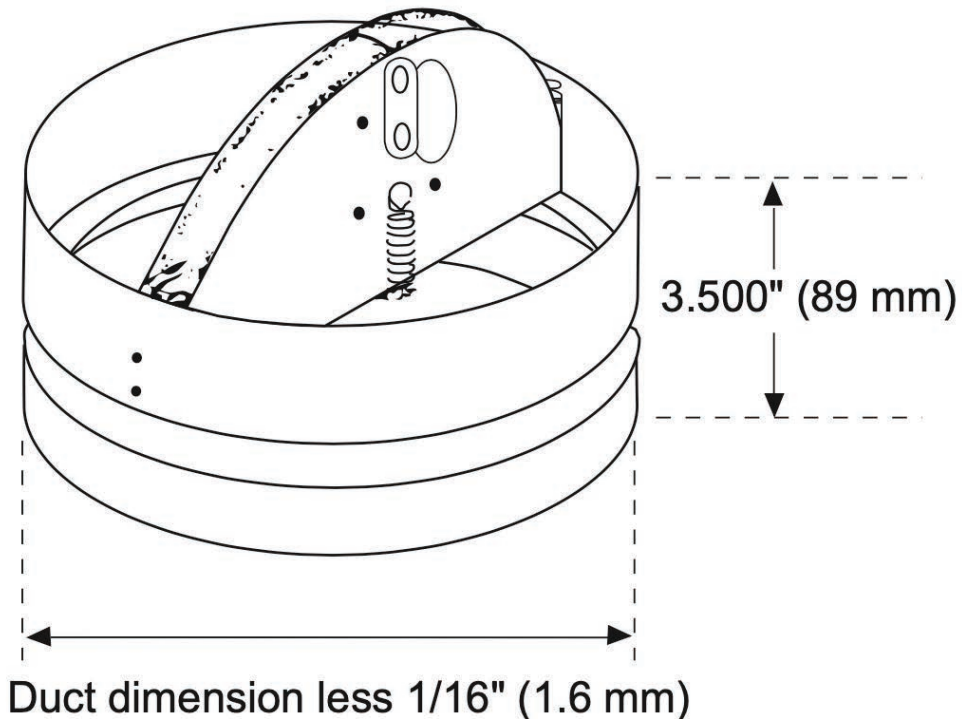



CDSQ

MODEL

CDSQ Square Ceiling Radiation Damper

FEATURES

- Square ceiling radiation damper
- Butterfly style damper
- UL555C tested & listed to protect penetrations made in the ceiling membrane of a fire rated floor/ceiling or roof/ceiling
- Intended to stop the passage of heat, not flame in HVAC penetrations


SPECIAL ORDER OPTIONS

- CFS - Curtain style ceiling radiation damper
- CFS-2F - Slimline curtain style CRD
- CFSR - Round to square curtain style CRD
- FDCTB24x24 - Thermal Blanket



WEB SEARCH: CDSQ

| Height | CDSQ Width | | | | | | | | | |
|--------|------------|---|----|----|----|----|----|----|----|----|
| | | 6 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 |
| | 6 | X | X | X | | | | | | |
| | 8 | | | | X | | | X | | |
| | 10 | | X | X | X | X | X | | X | X |
| | 11 | | | | | X | | | | |
| | 12 | | X | X | X | X | X | X | | X |
| | 14 | | | X | X | X | | X | | |
| | 16 | | | | | X | X | X | | |
| | 18 | | | | | | X | | | |
| | 20 | | | | | | | X | | X |
| | 22 | | | | | | | | X | |

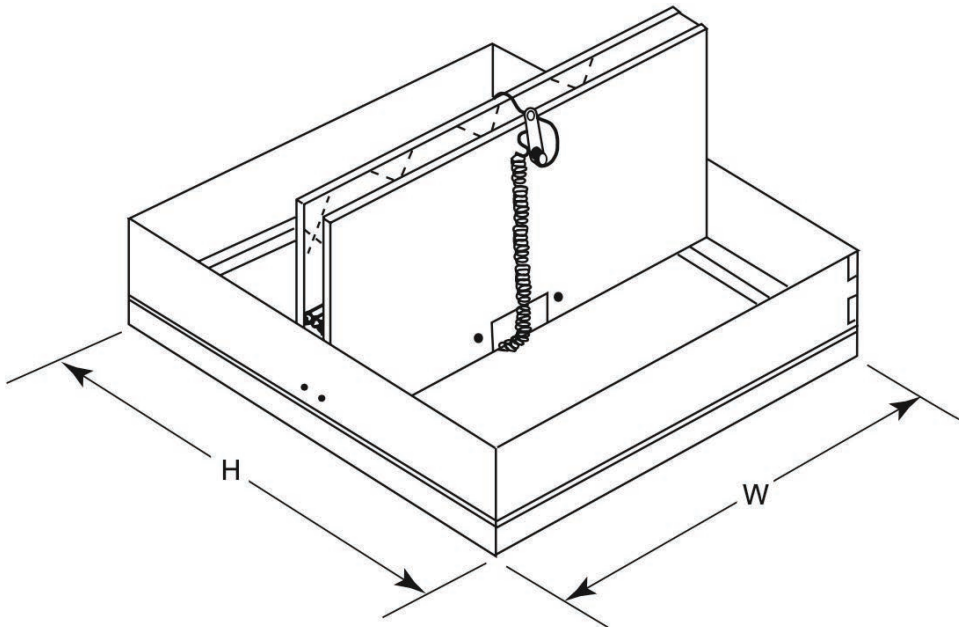

NOTE: Dampers not specified “Actual Size” will be sized 1/4” (6) under nominal.



OBD

MODEL

OBD Opposed Blade Damper

FEATURES

- Provides air volume control
- Tapered blades set in U-channel frame
- Largest length - 48"
- Largest width - 48"
- For use on the back of registers & grilles or at the termination of a duct run.
- Screwdriver operated, must be installed with access to the face of the damper in order to operate.
- Steel construction
- Mill finish



SPECIAL ORDER OPTIONS

- OBDA - Aluminum construction
- OBD-106 - Duct mounted with 6" x 1/2" diameter operator shaft
- 24V or 120V actuator models available



WEB SEARCH: OBD

| Height | OBD | Width | | | | | | | | | | | | |
|--------|-----|-------|---|----|----|----|----|----|----|----|----|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 30 | 36 |
| | 4 | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 6 | X | X | X | X | X | X | X | X | X | X | X | X | X |
| | 8 | | X | X | X | X | X | X | X | X | X | X | X | X |
| | 10 | | | X | X | X | X | X | X | X | X | X | X | X |
| | 12 | | | | X | X | X | X | X | X | | | X | X |
| | 14 | | | | | X | X | X | X | X | X | X | X | X |
| | 16 | | | | | | X | X | X | X | X | | X | X |
| | 18 | | | | | | | X | X | X | X | | X | X |
| | 20 | | | | | | | | X | X | X | | X | X |
| | 22 | | | | | | | | | X | X | | X | |
| | 24 | | | | | | | | | | X | | X | |
| | 30 | | | | | | | | | | | | X | |

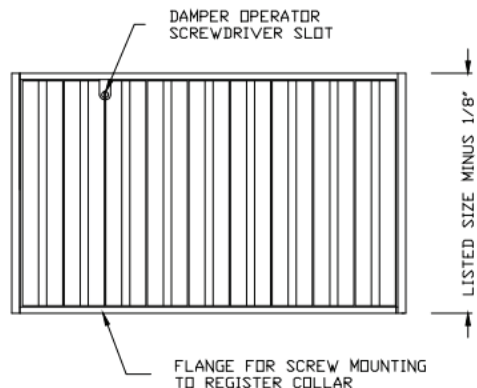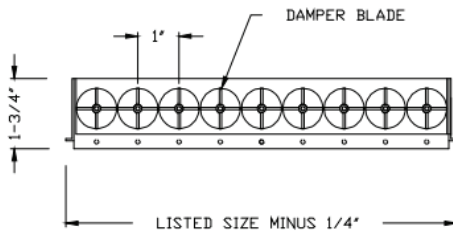

PVCD

Manual Control Damper



DAMPERS | CONTROL DAMPERS

PVCD



PVCD

MODEL

PVCD Manual Control Damper

FEATURES

- Single blade damper with 2" standoff bracket and locking quadrant
- 1/4" rod operator
- End bearings for smoother/quieter operation
- Quadrants and standoff brackets shipped loose for exterior duct mounting
- 18 gauge galvanized steel


SPECIAL ORDER OPTIONS

- SBD-38 - 18 gauge with 3/8" operator



WEB SEARCH: PVCD

| FDAHS | | Width | | | | | | | | | | | |
|--------|----|-------|---|---|----|----|----|----|----|----|----|----|---|
| Height | | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | |
| | 4 | X | X | X | X | X | X | X | X | X | X | X | |
| | 5 | | | | X | X | X | | | | | | |
| | 6 | X | X | X | X | X | X | X | X | X | X | X | |
| | 8 | | | | X | X | X | X | X | X | X | X | |
| | 10 | | | | X | X | X | X | X | X | | | X |
| | 12 | | | | | | X | X | X | X | X | X | X |
| | 14 | | | | | | X | X | X | X | X | X | X |
| | 16 | | | | | | | X | X | X | X | X | X |
| | 18 | | | | | | | | | X | X | X | X |

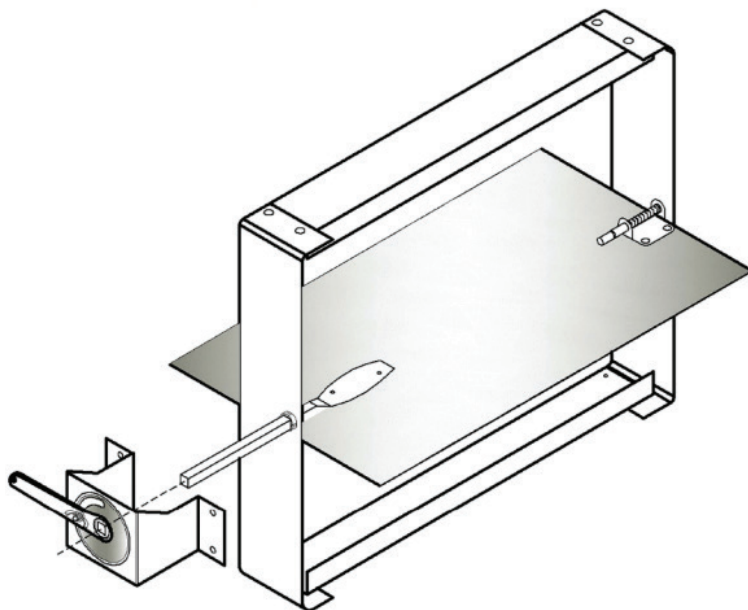

SCZC

24V Motorized Round Damper



DAMPERS | CONTROL DAMPERS

SCZC



SCZC

MODEL

SCZC 24V Motorized Round Damper

FEATURES

- 2 position 24VAC 10 VA 2-wire power open, spring return close actuator
- Ability to field change to be powered closed, spring open when required
- Nylon bushings for quiet, long lasting operation
- Constructed of galvanized smooth steel, double beaded for rigidity

SPECIAL ORDER OPTIONS

- 120V actuator



WEB SEARCH: SCZC

SIZES AVAILABLE

4"

5"

6"

7"

8"

9"

10"


12"

14"

16"

18"

20"

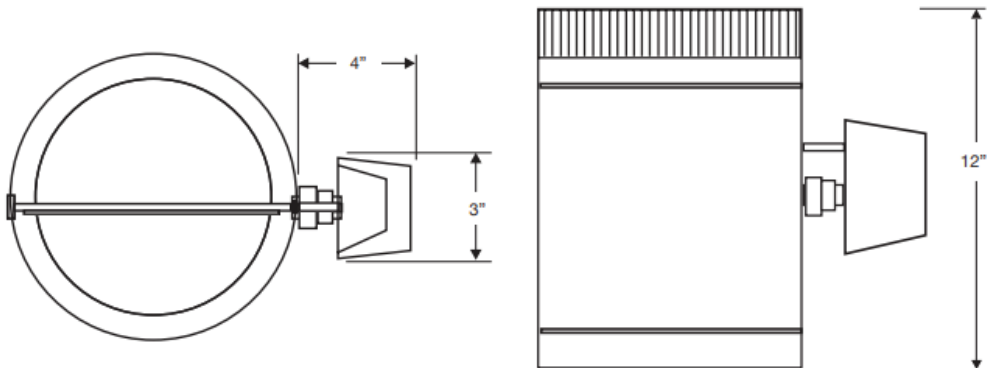

SCD57 / SCD-57-ACT

Control Dampers



DAMPERS | CONTROL DAMPERS

SCD57 / SCD-57-ACT / SCD-RD-88



SCD57



SCD-57-ACT

MODEL

SCD57 Manual Control Damper

FEATURES

- General purpose commercial control damper
- Intended for low to medium pressure and velocity applications
- Must be installed where blades run horizontally
- All dampers 32" and over are supplied with Jackshafting

MODEL

SCD-57-ACT Motorized Control Damper

FEATURES

- General purpose commercial control damper
- Intended for low to medium pressure and velocity applications
- Must be installed where blades run horizontally
- All dampers 32" and over are supplied with Jackshafting
- Includes 120V actuator



WEB SEARCH: CONTROL DAMPERS

MODEL

SCD-RD-88 Round Control Damper

FEATURES

- General purpose round commercial control damper for use in an automatic or manual balancing control applications where tight sealing is not of primary importance
- Intended for low to medium pressure and velocity applications
- Must be installed where the blade runs horizontally
- Standard w-2" stand off & locking quadrant
- Optional 120V, 24V or 230V actuator
- Optional low leakage blade seals - SCD-RD-LL-88



SCD-RD-88

SPCAR

Round Backdraft Damper



DAMPERS | BACKDRAFT

SPCAR



SPCAR

MODEL

SPCAR Round Backdraft Damper

FEATURES

- Spring loaded backdraft damper
- Can be used with most dryer and bathroom venting applications

SIZES AVAILABLE

SPCAR100 - 4"

SPCAR125 - 5"

SPCAR150 - 6"

SPCAR200 - 8"

SPCAR250 - 10"

SPCAR315 - 12"

SPCAR355 - 14"

SPCAR400 - 16"



WEB SEARCH: SPCAR

MODEL

XABD-1 Channel Backdraft Damper

FEATURES

- Aluminum backdraft damper
- Intended for low to medium velocities
- Economically constructed, made of anti-corrosive aluminum.
- Intended for vertical mounting, but the ability to horizontally mount (upflow only) can be added as an option
- Channel mount

SPECIAL ORDER OPTIONS

- Flange
- Counterweights
- 120V, or 230V actuator

SIZES FROM 8" X 6" TO 24" X 24" AVAILABLE

VISIT OUR WEBSITE OR CALL FOR A QUOTE



XABD-1

LOUVERS & DAMPERS | XABD-1

XABD-1

WEB SEARCH: XABD-1



2SRFAL

Exterior Louver



LOUVERS | EXTERIOR

2SRFAL



2SRFAL

MODEL

2SRFAL 2" Exterior Louver

FEATURES

- Stationary outside air louver
- These assist in keeping wind and airborne debris from entering the building while serving to enhance the building's exterior appearance
- 2" deep fixed blades
- 1.25" flanged frame
- .5"x.5" galvanized steel bird screen on the back
- Blades have 45° deflection
- Extruded aluminum construction
- Mill finish

SPECIAL ORDER OPTIONS

- Channel frame
- Insect screens
- Sill extension
- Optional finishes





WEB SEARCH: 2SRFAL

2SRFAL

Width

Height

| | 4 | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 28 | 30 | 36 | 48 |
|----|---|---|---|----|----|----|----|----|----|----|----|----|----|----|----|
| 4 | | | X | X | X | X | | | | | | | | | |
| 6 | | X | X | X | X | X | X | X | X | | X | | X | | X |
| 7 | | | | X | | | | | | | | | | | |
| 8 | X | | X | X | X | X | X | X | X | | X | | X | | |
| 10 | | | X | X | X | X | X | | | X | X | | X | | |
| 12 | | | | | X | X | X | X | | X | X | | X | | |
| 14 | | | | | | X | | | | | | X | | | |
| 16 | | | | | | | X | X | | | X | | | | |
| 18 | | | | | X | | | X | | | X | X | | | |
| 20 | | | | X | | | | | X | X | | | | | |
| 22 | | | | | | | | | | X | | | | | |
| 24 | | | | | | | | X | | | X | | | | |
| 30 | | | | | | | | | X | | X | | X | | |
| 36 | | | | | | | | | | | X | | | X | |

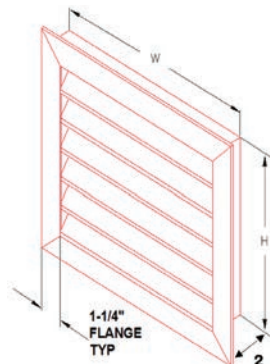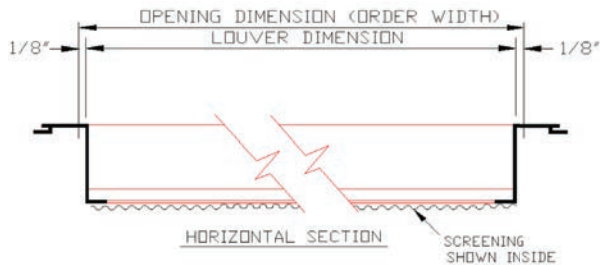

4SRFAL

Exterior Louver



LOUVERS | EXTERIOR

4SRFAL



4SRFAL

MODEL

4SRFAL 4" Exterior Louver

FEATURES

- Stationary outside air louver
- These assist in keeping wind and airborne debris from entering the building while serving to enhance the building's exterior appearance
- 4" deep fixed blades
- 1.25" flanged frame
- .5"x.5" galvanized steel bird screen on the back
- Blades have 45° deflection
- Miami-Dade County Approved
- Extruded aluminum construction
- Mill finish

SPECIAL ORDER OPTIONS

- Channel frame
- Insect screens
- Sill extension
- Optional finishes






WEB SEARCH: 4SRFAL

4SRFAL

Width

Height

| | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 26 | 28 | 30 | 32 | 36 | 48 |
|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 10 | | X | | X | X | X | X | | | X | | | |
| 12 | X | X | X | X | X | X | X | | | X | X | X | |
| 14 | | X | | X | | | | | X | X | X | | |
| 16 | X | X | X | | X | | X | | | X | | | |
| 18 | X | | | X | X | | X | X | | | | X | |
| 20 | X | X | | | X | | | | | X | | | X |
| 22 | | | | | | X | | | | | | | |
| 24 | X | | X | X | X | | X | | | X | | X | X |
| 26 | | | | | | | | | | X | | | |
| 30 | X | | | | | | X | | | X | | | |
| 32 | | | X | | | | | | | | | | |
| 36 | | | | | X | | X | | | X | | X | X |
| 48 | | | | | | | | | | | | X | |

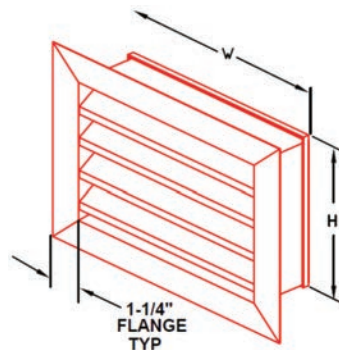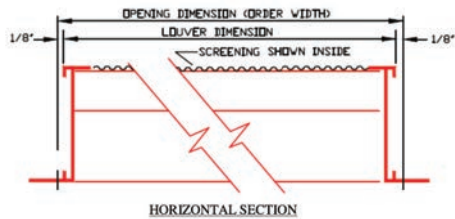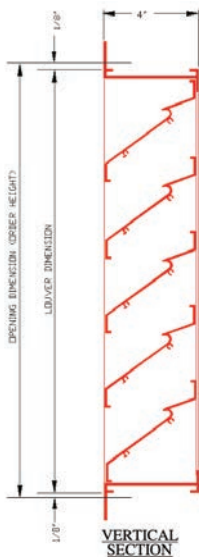

XAD6AL

Exterior Louver



LOUVERS | EXTERIOR

XAD6AL



XAD6AL

MODEL

XAD6AL 6" Exterior Louver

FEATURES

- 6" frame depth with many different screen and finish options
- Blades fixed at 37.5°, spaced appx. 5"
- Drainable louvers employ blades with a drainable section or "hook" in order to keep water from dripping into the air stream and possibly through the louver into the building


SPECIAL ORDER OPTIONS

- Flange or channel mount
- Insect and birdscreen options
- Miami dade or florida approved ratings
- Sill extensions
- Finish options including powder coating, kynar, and prime coating




WEB SEARCH: XAD6AL

| XAD6AL | | Width | | | | | | | | | |
|--------|----|-------|----|----|----|----|----|----|----|----|----|
| Height | | 12 | 14 | 16 | 18 | 20 | 24 | 28 | 30 | 36 | 48 |
| | 10 | | | | | | | | | X | |
| | 12 | X | X | | X | | X | | | X | |
| | 14 | | X | | X | | | X | | | |
| | 16 | | | X | X | X | X | | | | |
| | 18 | X | X | | X | | X | | | X | |
| | 20 | | | | | X | | | X | | |
| | 24 | | | | | | X | | X | X | X |
| | 30 | | | | | | X | | X | | |
| | 36 | | | | | | | | | X | |

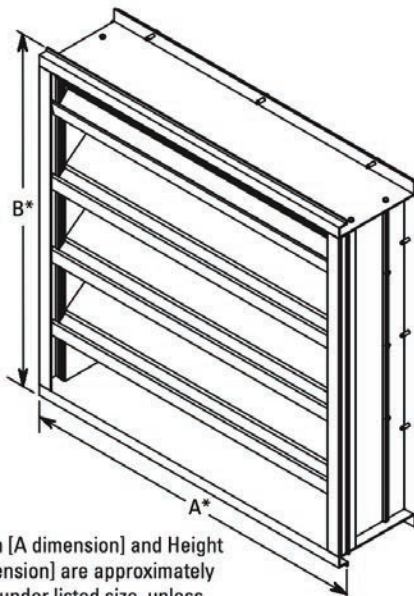

* Width [A dimension] and Height [B dimension] are approximately 1/4" (6) under listed size, unless otherwise specified.

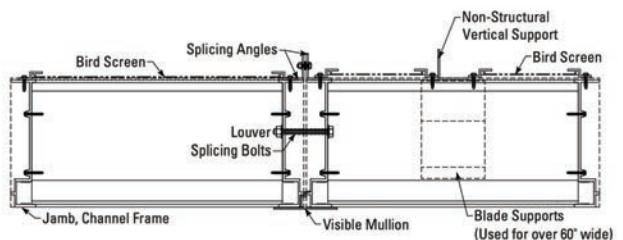

Note: Concealed (Architectural) mullions are not available with operable blade products.

BBMR CB / BBMR CG / BBMR CA

Roof Vents



ROOF / WALL CAPS | ROOF VENTS

BBMR CB / BBMR CG / BBMR CA



BBMR CB



BBMR CG



BBMR CA

MODEL

BBMR CB Black Metal Roof Cap
BBMR CG Galvanized Steel Roof Cap
BBMR CA Aluminum Roof Cap

FEATURES

- BBMR CB - 26 gauge galvanized steel
- BBMR CG - 26 gauge bright spangled galvanized
- BBMR CA - 24 gauge aluminum metal
- Each has a removable 1/4" x 1/4" screen
- Back draft dampers
- Flush mount or collar available



WEB SEARCH: ROOF VENTS

BBMR CB

4"
6"
8"

BBMR CG

4"
6"
8"
10"

BBMR CA

4"
6"
8"

BBDVFS

Dryer Vent Damper with Screen



ROOF/WALL CAPS | ROOF VENTS

BBDVFS



BBDVFS

MODEL

BBDVFS Dryer Vent Damper with Screen

FEATURES



- 24 gauge aluminum
- Mouth opening exceeds pipe area for best airflow
- 1/4"x1/4" screens mechanically inserted and removable
- Back draft flapper
- Available without tailpipe or with 6" tailpipe
- 4 mounting holes for secure connections
- Riveted construction, no caulk
- Mill finish



WEB SEARCH: BBDVFS

BBDVFS

4"
6"
8"
10"
12"



BBDVFS

| Dia. | Tail | Flapper | Screen | A(in.) | B(in.) | C(in.) | D(in.) |
|------|------|---------|------------------------|--------|--------|--------|--------|
| 4" | 6" | Flapper | 1/4"x1/4" removable | 7 | 4 | 5.25 | 6 |
| 6" | 6" | Flapper | 1/4"x1/4" removable | 9 | 4 | 8 | 6 |
| 8" | 6" | Flapper | 1/4"x1/4" removable | 11.25 | 5.375 | 10 | 6 |
| 10" | 6" | Flapper | 1/4"x1/4" removable | 14.125 | 6.875 | 12 | 6 |
| 12" | 6" | Flapper | 1/4"x1/4" removable | 14.125 | 6.875 | 14 | 6 |

DFHSW / DFHSB

Plastic Wall Caps



ROOF/WALL CAPS | DRYER VENTS

DFHS



DFHSW



DFHSB

MODEL

DFHSW White Dryer Vent
DFHSB Brown Dryer Vent

FEATURES

- Deflect-O plastic dryer vent cap
- Quick and easy installation
- Louvered construction helps prevent wind and rain from entering vent
- Opens with ease for maximum airflow
- Durable and weather resistant
- Features curved louvers for quiet operation
- White and brown finish available

DFHSW/B

3"
4"
5"
6"



WEB SEARCH: DFHS

MODEL

BBHSW White Dryer Wall Cap

BBHSB Brown Dryer Wall Cap

FEATURES

- Polypropylene molded plastic
- Molded snap ring for easy connection to pipe
- Free swinging louvers
- 4 mounting holes
- Screens are 1/4"x1/4" molded grid
- White and brown finish

BBHSW/B

7"

8"



BBHSW



BBHSB

ROOF/WALL CAPS | DRYER VENTS

BBHS

WEB SEARCH: BBHS



DFSVHAW

Heavy Duty Dryer Exhaust Wall Cap with Bird Guard



ROOF/WALL CAPS | DRYER CAPS

DFSVHAW



DFSVHAW

MODEL

DFSVHAW Heavy Duty Dryer Wall Cap with Bird Guard

FEATURES

- Louvered vent cover operates quietly for maximum exhaust air flow
- Melting point: 325°F / 163°C
- Pre-assembled with rigid 4" diameter vent pipe and collar
- Removable bird guard keeps birds and other pests from entering homes or nesting in outdoor vent
- Vent cover and bird guard vent hood are durable, weather-resistant and include a UV inhibitor to prevent sun damage and cracking

DFSVHAW

4"

6"



WEB SEARCH: DFSVHAW

MODEL

DFSVMAW Plastic Intake Vent

FEATURES

- 3 louvered vent hood operates quietly for maximum exhaust air flow
- Made in the USA
- Melting point: 325°F / 163°C
- Pre-assembled with rigid 4" diameter vent pipe and collar
- Vent hood is durable, weather-resistant and includes a UV inhibitor to prevent sun damage and cracking

DFSVMAW

4"
6"



DFSVMAW

ROOF/WALL CAPS | DRYER CAPS

DFSVMAW

WEB SEARCH: DFSVMAW





AD

MODEL

AD Universal Sheetrock Access Door

FEATURES

- For installation in drywall, plaster, masonry, tile, or any flush surface
- Door panel has rounded safety corners providing an architecturally pleasing appearance
- One piece trim flange will not rack or sag
- Unique continuous concealed hinge will not bind
- Steel construction
- White finish
- 6x6 - 14x14: 16 gauge door, 18 gauge frame
- 16x16 and larger: 14 gauge door, 16 gauge frame
- Stainless steel slotted screwdriver cam latch


SPECIAL ORDER OPTIONS

- Cylinder lock
- 304 Stainless Steel



WEB SEARCH: AD

| AD | Width | | | | | | | | | | | |
|--------|-------|---|----|----|----|----|----|----|----|----|----|----|
| | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 30 | 36 |
| Height | 6 | X | | | | | | | | | | |
| | 8 | | X | | X | | | | | | | |
| | 10 | | | X | | | | | | | | |
| | 12 | | X | | | | | | | | | |
| | 14 | | | | X | | | | | | | |
| | 16 | | | X | | X | | | | | | |
| | 18 | | | X | | | X | | | | | |
| | 20 | | | | | | | X | | | | |
| | 22 | | | | | | | | X | | | |
| | 24 | | | X | | X | X | | | X | | |
| | 30 | | | | | | | | X | X | X | |
| | 36 | | | | | | | | X | X | | X |
| | 48 | | | | | | | | | X | | |

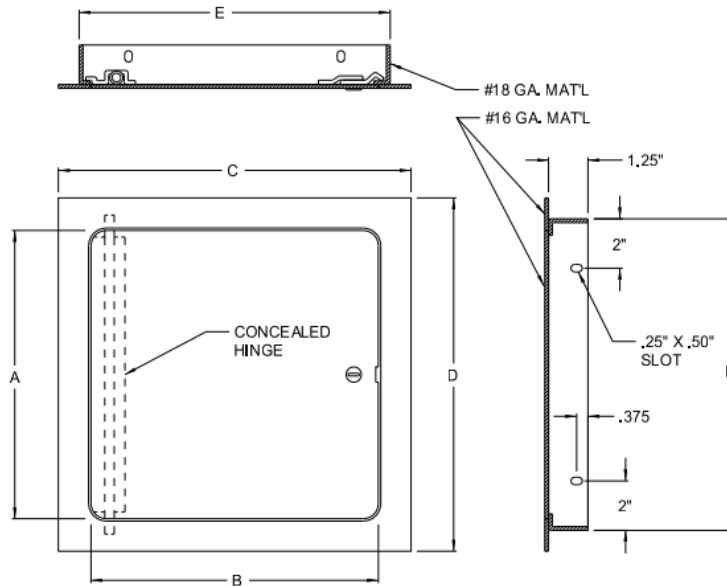

ADDW

Drywall Beaded Flange Access Door



ACCESS DOORS | DRYWALL

ADDW



ADDW

MODEL

ADDW Drywall Beaded Flange Access Door

FEATURES

- Designed specifically for installation in drywall and ceilings after the drywall has been installed
- Formed door panel with flanges on all 4 sides
- Unique concealed hinge, door flange is a perforated tapping bead with pre-punched holes
- 20 gauge galvanized door panel, 26 gauge galvanized frame
- Slot screwdriver operated cam latch
- White finish


SPECIAL ORDER OPTIONS

- Cylinder lock with key



WEB SEARCH: ADDW

| ADDW | | Width | | | | | | | | | | |
|--------|----|-------|---|----|----|----|----|----|----|----|----|----|
| Height | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 22 | 24 | 30 | 36 |
| | 6 | X | | | | | | | | | | |
| | 8 | | X | | | | | | | | | |
| | 10 | | | X | | | | | | | | |
| | 12 | | | | X | | | | | | | |
| | 14 | | | | | X | | | | | | |
| | 16 | | | | | | X | | | | | |
| | 18 | | | | | | | X | | | | |
| | 22 | | | | | | | | X | | | |
| | 24 | | | | | | | | | X | | |
| | 30 | | | | | | | | | | X | |
| | 36 | | | | | | | | | X | | X |

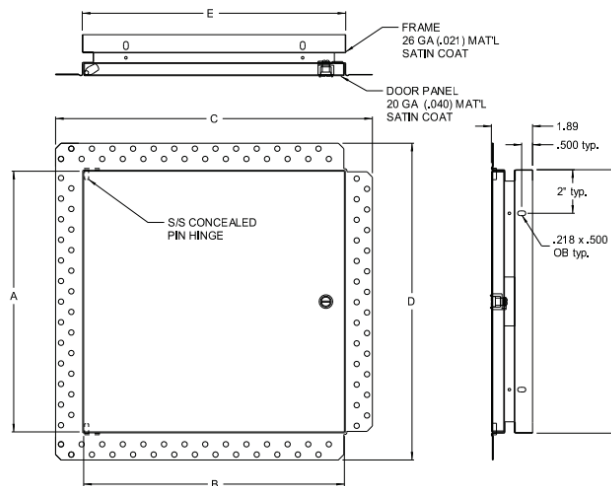

ADFRCW

Insulated Fire Rated Access Door



ACCESS DOORS | FIRE RATED

ADFRCW



ADFRCW

MODEL

ADFRCW Insulated Fire Rated Access Door


FEATURES

- Designed for walls and ceilings
- This access door should be used in walls where temperature rise or heat transmission is a factor
- Insulated door panel
- Concealed hinge
- Self-closing
- Universal self-latching bolt operated by either a knurled nob or flush key.
- Steel construction
- White finish
- Wall rating:
 - UL 1.5 hr B label / ULC 2 hr B label
- Ceiling rating
 - 3 hr rated max size 24x36
 - Max size 36x48



WEB SEARCH: ADFRCW

| ADFCRW | | Width | | | | | | | | | |
|--------|----|-------|----|----|----|----|----|----|----|----|----|
| Height | | 8 | 10 | 12 | 14 | 16 | 18 | 22 | 24 | 30 | 36 |
| | 8 | X | | | | | | | | | |
| | 10 | | X | | | | | | | | |
| | 12 | | | X | | | | | | | |
| | 14 | | | | X | | | | | | |
| | 16 | | | | | X | | | | | |
| | 18 | | | | | | X | | | | |
| | 24 | | | | | | | | X | | |
| | 30 | | | | | | | X | X | X | |
| | 36 | | | | | | | X | X | X | |
| | 48 | | | | | | | | X | | X |

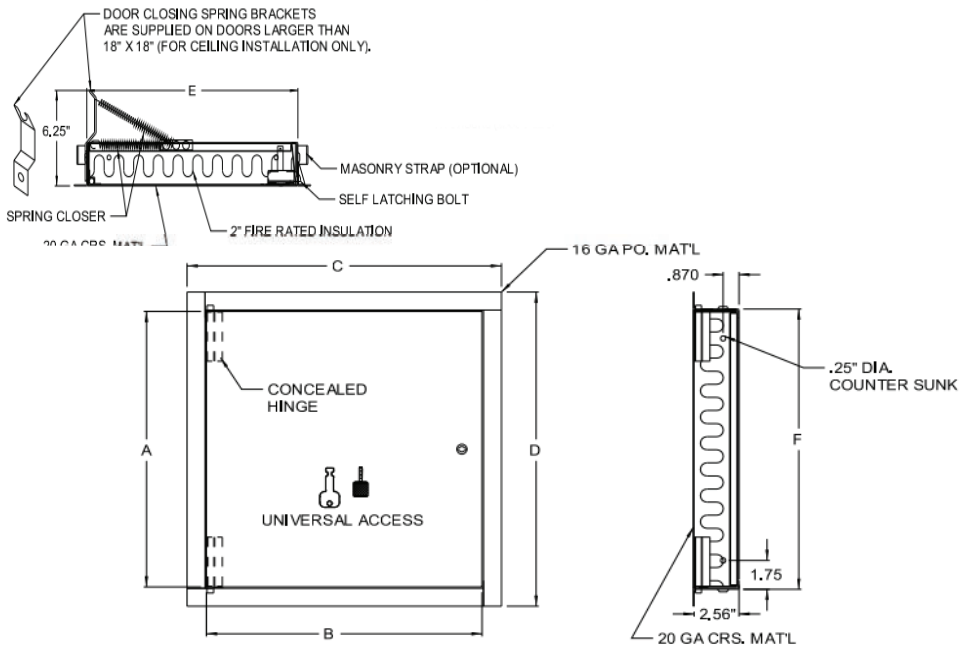

ADFRW

Uninsulated Fire Rated Access Door



ACCESS DOORS | FIRE RATED

ADFRW



ADFRW

MODEL

ADFRW Insulated Fire Rated Access Door




FEATURES

- Designed for wall application only
- This access door should be used in walls where temperature rise or heat transmission is a factor
- Uninsulated door panel
- Concealed hinge
- Self-closing
- Universal self-latching bolt operated by either a knurled nob or flush key.
- Steel construction
- White finish
- 16 gauge door, 16 gauge frame
- Wall rating:
 - UL 1.5 hr B label
- Max size 26x48 or 24x79



WEB SEARCH: ADFRW

| Height | ADFRW Width | | | | | | | | | | |
|--------|-------------|---|----|----|----|----|----|----|----|----|----|
| | | 8 | 10 | 12 | 14 | 16 | 18 | 22 | 24 | 30 | 36 |
| | 8 | X | | | | | | | | | |
| | 10 | | X | | | | | | | | |
| | 12 | | | X | | | | | | | |
| | 14 | | | | X | | | | | | |
| | 16 | | | | | X | | | | | |
| | 18 | | | | | | X | | | | |
| | 24 | | | | | | | | X | | |
| | 30 | | | | | | | X | X | X | |
| | 36 | | | | | | | X | X | X | |
| | 48 | | | | | | | | X | | X |

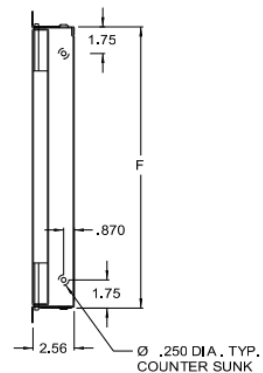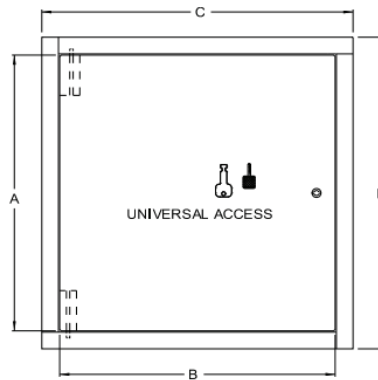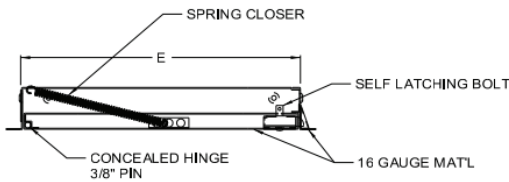

ADPL

Plastic Access Door



ACCESS DOORS | PLASTIC

ADPL



ADPL

MODEL

ADPL Plastic Access Door


FEATURES

- Provides easy access to walls and ceilings
- Very economical and attractive
- 1/8" high impact styrene plastic with U.V. stabilizers
- Concealed hinged face with a removable feature
- Plastic construction
- White finish



WEB SEARCH: ADPL

| Height | ADPL | | Width | | | | |
|--------|------|---|-------|----|----|----|----|
| | | 6 | 12 | 14 | 18 | 22 | 24 |
| | 6 | X | | | | | |
| | 12 | | X | | | | |
| | 14 | | | X | | | |
| | 18 | | | | X | | |
| | 22 | | | | | X | |
| | 24 | | | | | | X |

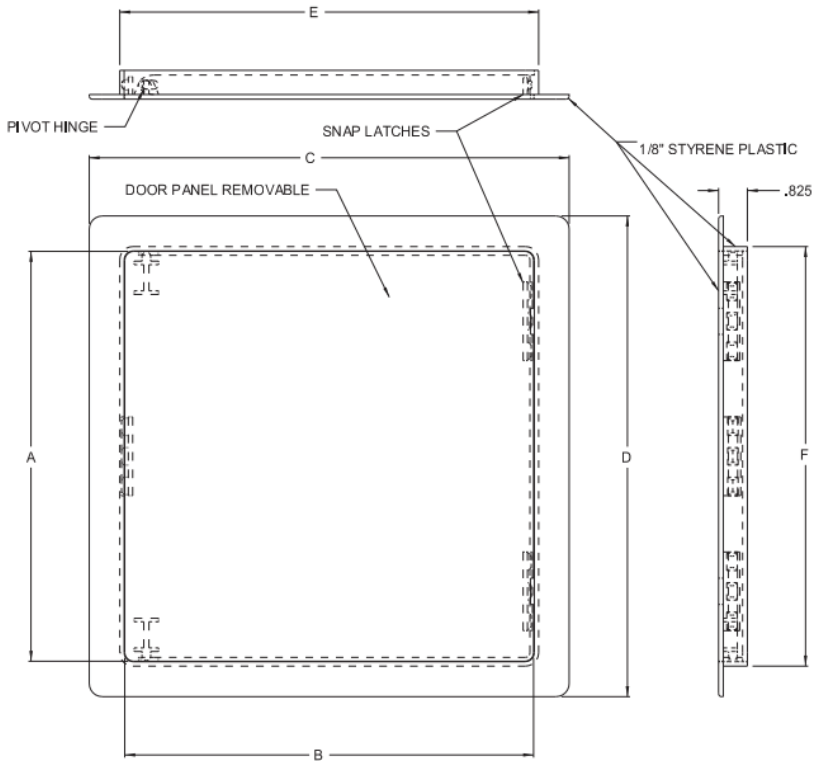

L95C / L95T

Sheet Metal Access Door



ACCESS DOORS | SHEET METAL

L95C / L95T



L95C



L95T

MODEL

L95C Sheet Metal Access Door

L95T Tabbed Sheet Metal Access Door


FEATURES

- Constructed from 26 gauge galvanized steel
- Foam insulated door
- Door sealed with 1/2" wide x 1/8" thick foam tape
- L95C - Peel-off adhesive gasket is provided by the factory to hold the fitting in place securely during installation and to ensure minimal leakage
- Cam-style latches
- L95T - Tabbed frame for mounting




WEB SEARCH: L95C | L95T

| Height | L95C Width | | | | | | | | | |
|--------|------------|---|---|----|----|----|----|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 24 |
| | 6 | X | | | | | | | | |
| | 8 | | X | | | | | | | |
| | 10 | | | X | | | | | | |
| | 12 | | | | X | | | | | |
| | 14 | | | | | X | | | | |
| | 16 | | | | | | X | | | |
| | 18 | | | | | | | X | | |
| | 20 | | | | | | | | X | |
| 24 | | | | | | | | | X | |
| 30 | | | | | | | | | X | |
| 36 | | | | | | | | | | |

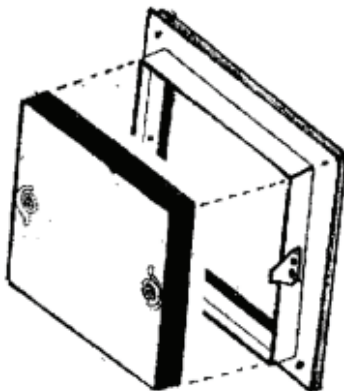

Cammed
(2 week lead)

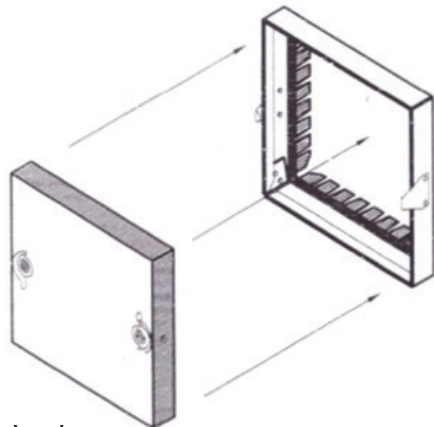

Tabbed
(Stocked)


ADDB

Duct Board Access Door



ACCESS DOORS | SHEET METAL

ADDB



ADDB

MODEL

ADDB Duct Board Access Door


FEATURES

- Constructed from 26 gauge galvanized steel
- Foam insulated door
- Door sealed with 1/2" wide x 1/8" thick foam tape
- No raw edges once installed
- 6x6 through 16x16 have 2 cams per door
- 18x18 and larger have 4 cams per door



WEB SEARCH: ADDB

| Height | ADDB | Width | | | | | | | | | |
|--------|------|-------|---|----|----|----|----|----|----|----|----|
| | | 6 | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 |
| | 6 | x | | | | | | | | | |
| | 8 | | x | | | | | | | | |
| | 10 | | | x | | | | | | | |
| | 12 | | | | x | | | | | | |
| | 14 | | | | | x | | | | | |
| | 16 | | | | | | x | | | | |
| | 18 | | | | | | | x | | | |
| | 20 | | | | | | | | x | | |
| | 22 | | | | | | | | | x | |
| | 24 | | | | | | | | | | x |

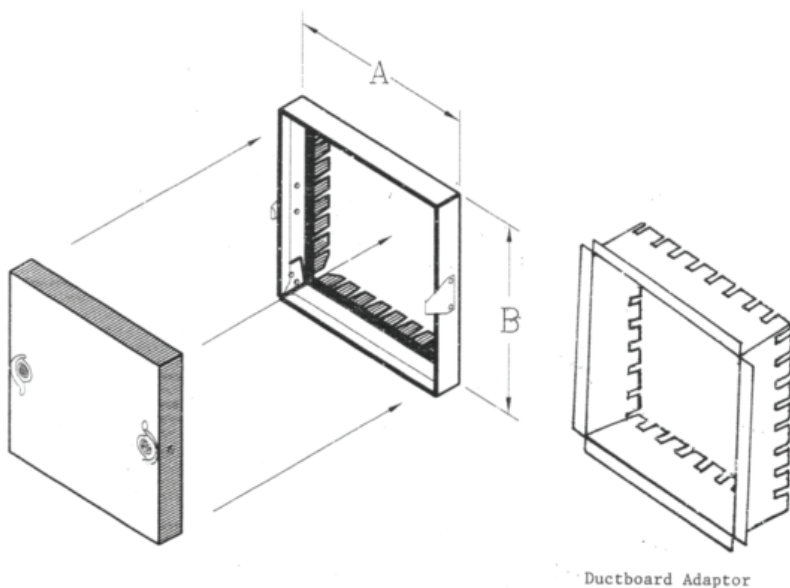

ADRD5090

Round Access Door



ACCESS DOORS | ROUND

ADRD5090



ADRD5090

MODEL

ADRD5090 Round Access Door


FEATURES

- Access door for use on round pipe
- Features 16 gauge galvanized steel construction
- Plated steel pull and catch lock/latch system, along with the gasketing on the door assures a tight seal without obstruction in the air system
- Flange: hinge mounted
- Continuous piano hinge



WEB SEARCH: ADRD5090

| NOMINAL DOOR SIZE | DIM 'W' | DIM 'H' | DIM 'D' | LBS | KG | DRAW LATCH |
|---------------------|------------|------------|---------|-------|-----|------------|
| Inches (mm) | | | | | | |
| 7 x 5 (175 x 125) | 7.00 (140) | 5.00 (125) | 6.00 | 1-1/4 | .6 | 2 |
| 9 x 8 (225 x 200) | 9.00 (191) | 8.00 (200) | 8.00 | 1-3/4 | .8 | 2 |
| 11 x 9 (275 x 225) | 11.0 (241) | 9.00 (225) | 10.0 | 3 | 1.2 | 2 |
| 13 x 10 (325 x 250) | 13.0 (292) | 10.0 (250) | 12.0 | 3-1/2 | 1.6 | 2 |
| 15 x 13 (375 x 325) | 15.0 (343) | 13.0 (325) | 14.0 | 4 | 1.8 | 3 |
| 17 x 13 (425 x 325) | 17.0 (394) | 13.0 (325) | 16.0 | 5-1/2 | 2.5 | 3 |
| 19 x 15 (475 x 375) | 19.0 (445) | 15.0 (375) | 18.0 | 6 | 2.7 | 3 |
| 19 x 17 (475 x 425) | 19.0 (495) | 17.0 (425) | 20.0 | 6-3/4 | 3.1 | 3 |
| 20 x 17 (500 x 425) | 20.0 (597) | 17.0 (425) | 24.0 | 7-1/4 | 3.3 | 3 |

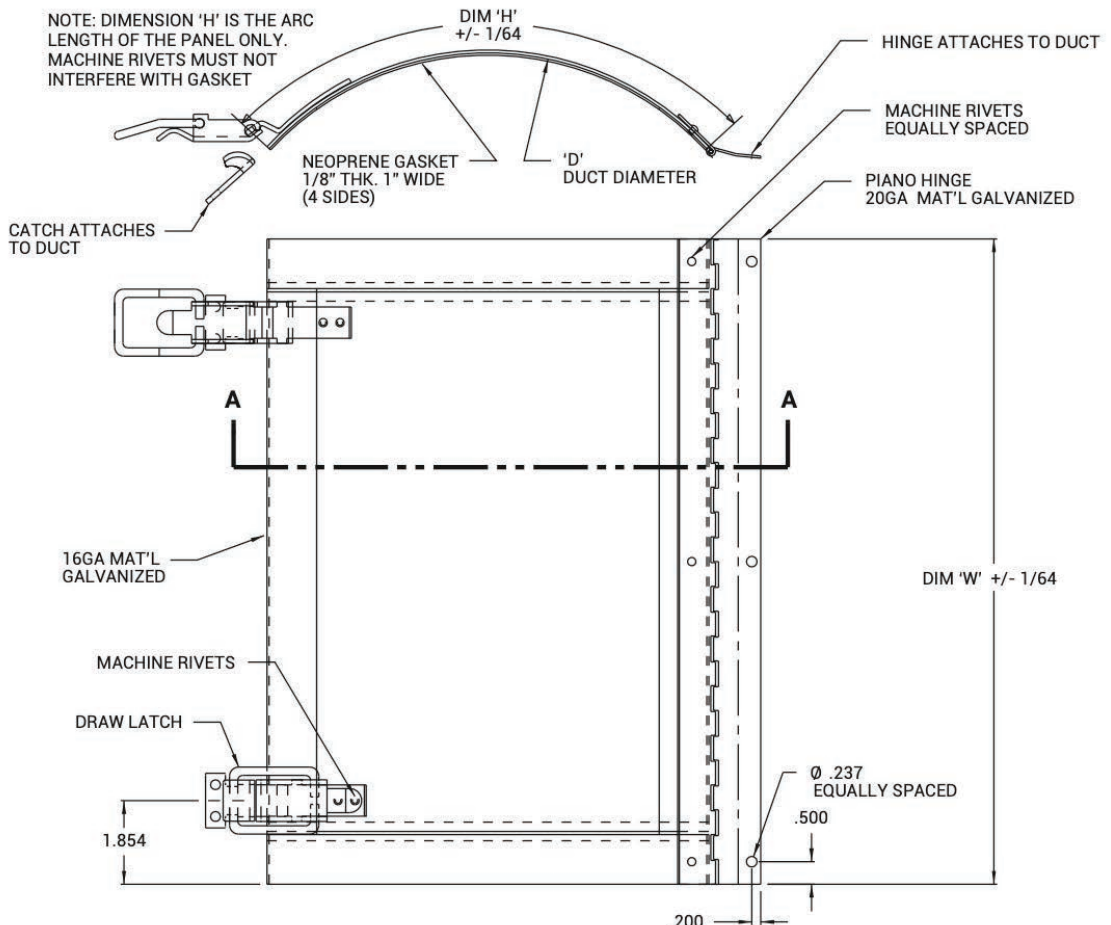

BRL

Ceiling Ventilation Fans



FANS | BATH FANS

BRL



BRL

MODEL

BRL Ceiling Ventilation Fans

FEATURES

- For use in whole home or commercial ventilation
- Ultra quiet performance
- Includes 8 way adjustable mounting brackets for easy ceiling-mount installation
- Duct horizontally, vertically, or in-line with seperate adapter
- Quiet, automatic backdraft dampers
- Rugged galvanized steel housing design
- AMCA licensed for air and sound performance
- cUL and UL listed

SPECIAL ORDER OPTIONS

- Optional metal grille
- Inline model BRL-L
- Speed controller BRH9000
- Ceiling radiation damper
- Vibration isolation hangers



WEB SEARCH: BRL

MODELS AVAILABLE

BRL100

BRL150

BRL200

BRL250

BRL300


BRL400

BRL500


BRL700

BRL900

BRL1500

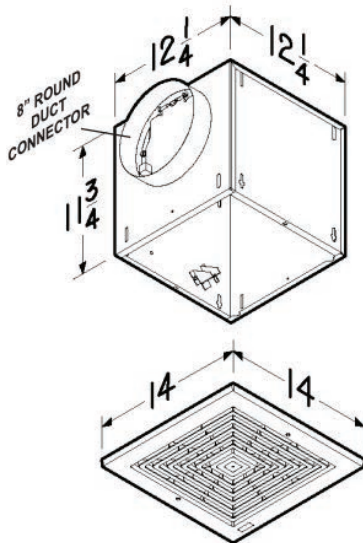

Drawing for BRL 100 - 300

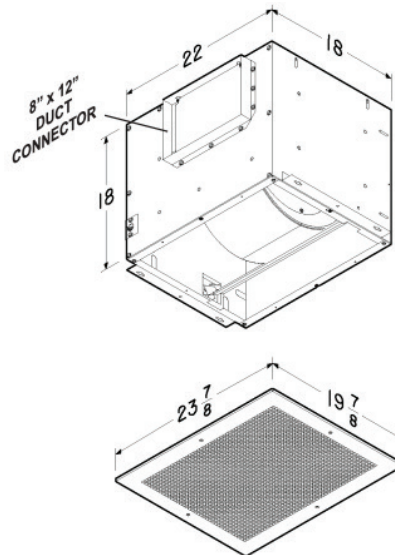

Drawing for BRL 400 - 1500

SPPCV50 / SPPCV80

Premium Value Series Bath Fan



FANS | BATH FANS

SPPCV50 / SPPCV80



SPPCV50



SPPCV80

MODEL

SPPC Ceiling Cabinet Fans

FEATURES

- Quiet operation 1.7 to 2.0 sones
- 60 and 80 CFM Models
- 4" duct connector with built-in backdraft damper
- Housing size: 9"x9" x 5-3/4"
- Robust steel housing
- Attractive, sturdy grille
- Thermally protected motor
- ETL listed
- HVI certified
- Model PCV80 is ENERGY STAR® qualified
- 5-year warranty

SPECIAL ORDER OPTIONS

- Speed controller
- Ceiling radiation damper





WEB SEARCH: SPPCV50 / SPPCV80



SPPCV50 / SPPCV80

Premium Value Series Bath Fan

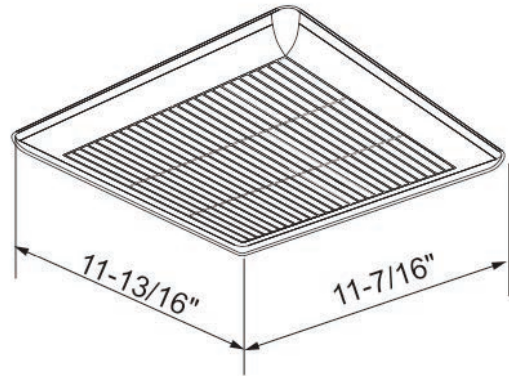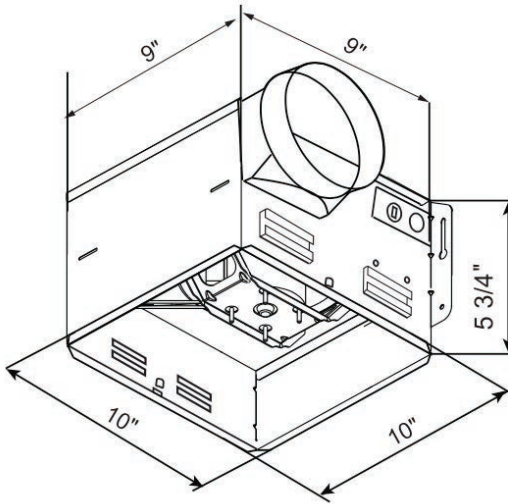

| Model | Duct Size for Test | CFM | Static Pressure (in W.G.) | Watts | Power (V/Hz) | Sones |
|-------|--------------------|-----|---------------------------|-------|--------------|-------|
| PCV50 | 4" | 50 | 0.1 | 60 | 120/60 | 2.0 |
| PCV80 | 4" | 80 | 0.1 | 24 | 120/60 | 1.7 |



FTDEDPV705

UL Listed Dryer Booster Fan



FANS | DRYER BOOSTER FAN

FTDEDPV705



FTDEDPV705



MODEL

FTDEDPV705 UL Listed Dryer Booster Fan

FEATURES


- Dryer exhaust duct power ventilator
- Certified by UL to the DEDPV requirements of UL705
- UL-Listed for use with gas and electric dryers
- Duct runs between 25 and 125 linear feet
- Cord connected and features a pressure switch to automatically sense when the dryer is on.
- LED light will inform homeowner of the nature of the problem

SPECIAL ORDER OPTIONS

- Lint trap kit - FTDBLT4W




WEB SEARCH: FTDEDPV705

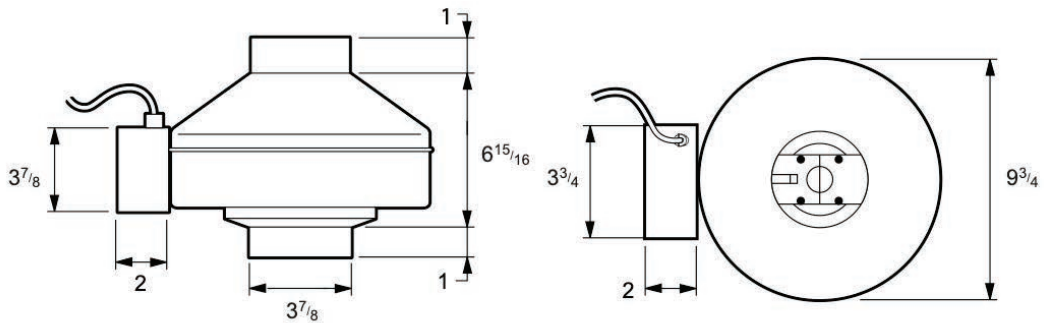

| Model | Metal Gauge | Weight |
|-----------|-------------|--------|
| DEDPV-705 | 22 | 10 |

Dimensions are in inches. Weights is in pounds

Wiring Guide

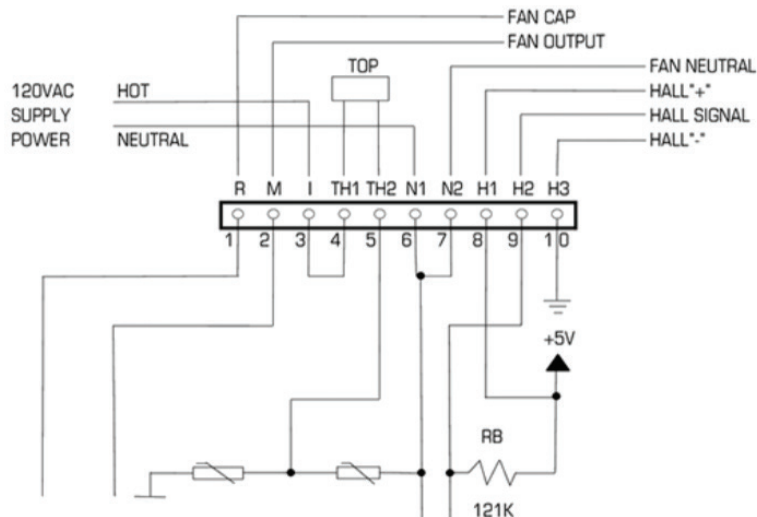

FTDBF110

Standard Dryer Booster Fan



FANS | DRYER BOOSTER FAN

FTDBF110



FTDBF110

MODEL

FTDBF110 Standard Dryer Booster Fan

FEATURES


- FTDBF110 is a duct booster fan designed for boosting air on demand
- Equipped with a pressure-sensing switch that activates the fan once positive pressure is sensed in the duct line.
- Switch shuts the fan off when the pressure in the duct is normalized
- Features a plastic leak-proof housing
- Suitable for 4" ductwork
- Performance certified by HVI
- Safety certified by ETL to UL507

SPECIAL ORDER OPTIONS

- Lint trap kit - FTDBLT4W



WEB SEARCH: FTDBF110

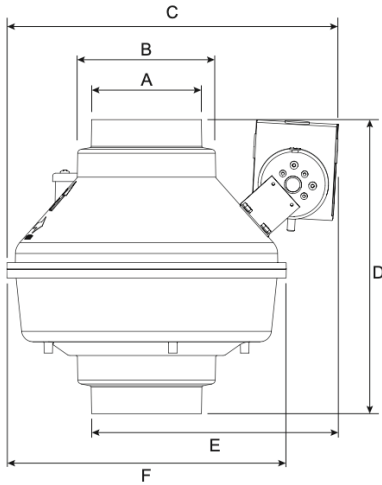

| | A | B | C | D | E | F |
|---------|---------------------------------|---------------------------------|--------------------------------|--------------------------------|-------------------------------|--------------------------------|
| DBF 110 | 3 ³¹ / ₃₂ | 4 ³¹ / ₃₂ | 12 ³ / ₄ | 11 ¹ / ₄ | 9 ¹ / ₂ | 10 ⁵ / ₈ |

Dimensions are in inches.

DBF110 Wiring – Fan and Pressure Switch



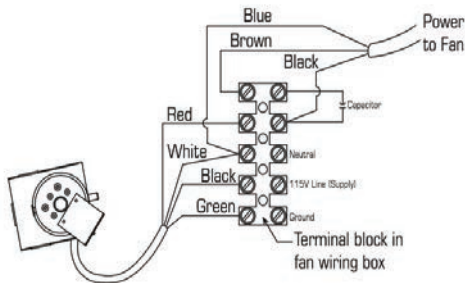


Illustration 6

DBF110 only
Switch Circuit

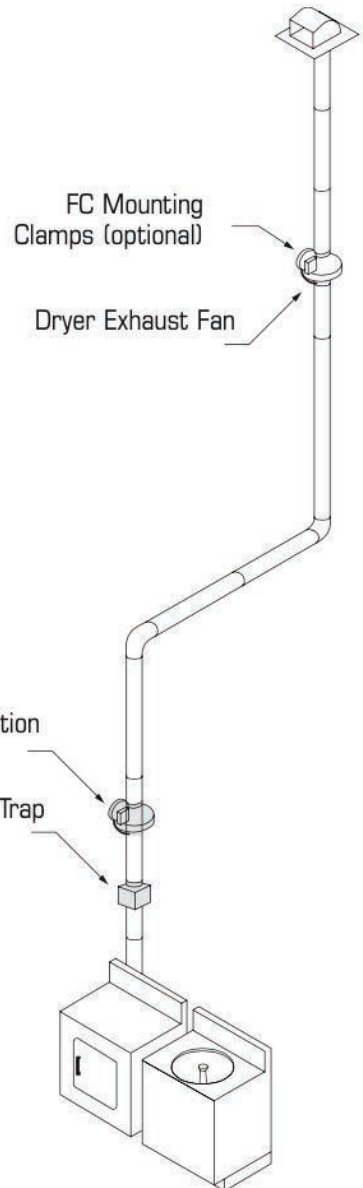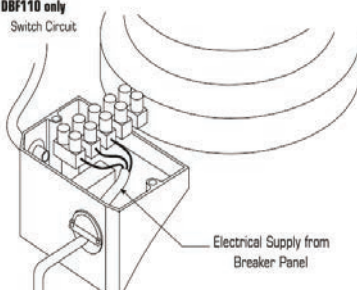

FTDBF4XL

Standard Dryer Booster Fan



FANS | DRYER BOOSTER FAN

FTDBF4XL



FTDBF4XL

MODEL

FTDBF4XL

FEATURES


- FTDBF4XL is a duct booster fan designed for boosting air on demand
- Product is equipped with a 5 foot cord
- Pressure-sensing switch that activates the fan once positive pressure is sensed in the duct line
- Switch shuts the fan off wehn the pressure in the duct is normalized
- Features a galvanized metal housing
- Suitable for 4" ductwork
- Performance certivied by HVI
- Safety certified by ETL to UL507

SPECIAL ORDER OPTIONS

- Lint trap kit - FTDBLT4W




WEB SEARCH: FTDBF4XL

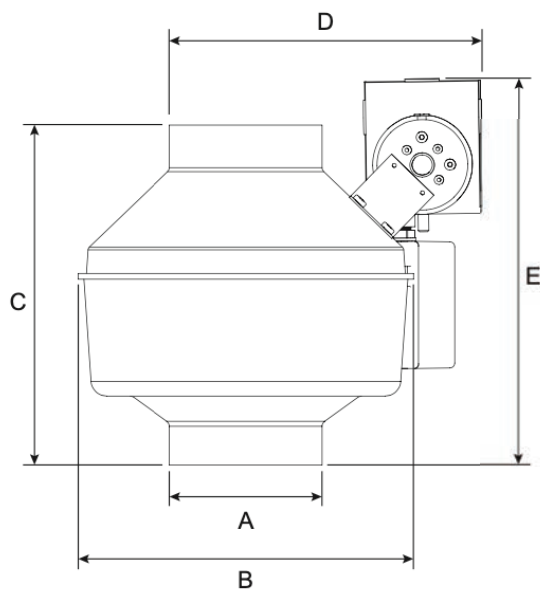

| | A | B | C | D | E |
|--------|-------|-------|-------|-------|-------|
| DBF4XL | 3 7/8 | 9 7/8 | 8 1/4 | 9 1/4 | 8 5/8 |

Dimensions are in inches

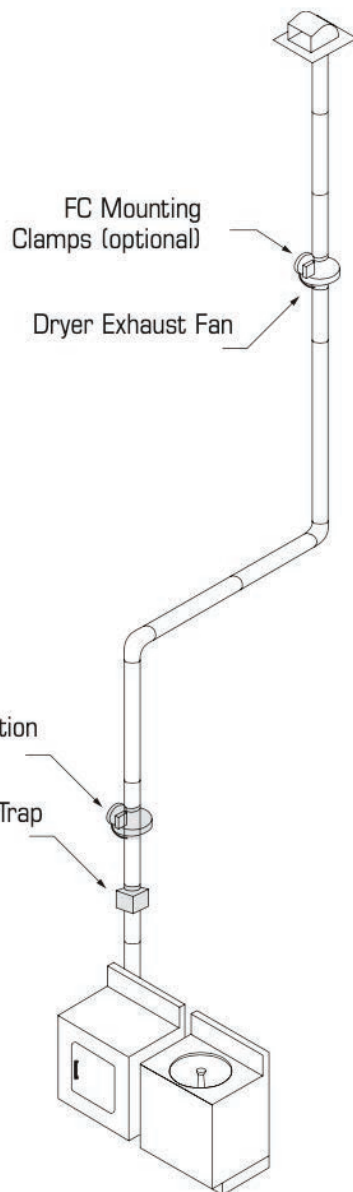

FTDBF4XLT

Standard Dryer Booster Fan



FANS | DRYER BOOSTER FAN

FTDBF4XLT



FTDBF4XLT

MODEL

FTDBF4XLT Standard Dryer Booster Fan

FEATURES


- FTDBF4XL is a duct booster fan designed for boosting air on demand
- Product is equipped with a 5 foot cord and an indicator panel to indicate status of operation
- Pressure-sensing switch that activates the fan once positive pressure is sensed in the duct line
- Switch shuts the fan off wehn the pressure in the duct is normalized
- Suitable for 4" ductboard
- Features a galvanized metal housing
- Performance certivied by HVI
- Safety certified by ETL to UL507

SPECIAL ORDER OPTIONS

- Lint trap kit - FTDBLT4W



WEB SEARCH: FTDBF4XLT

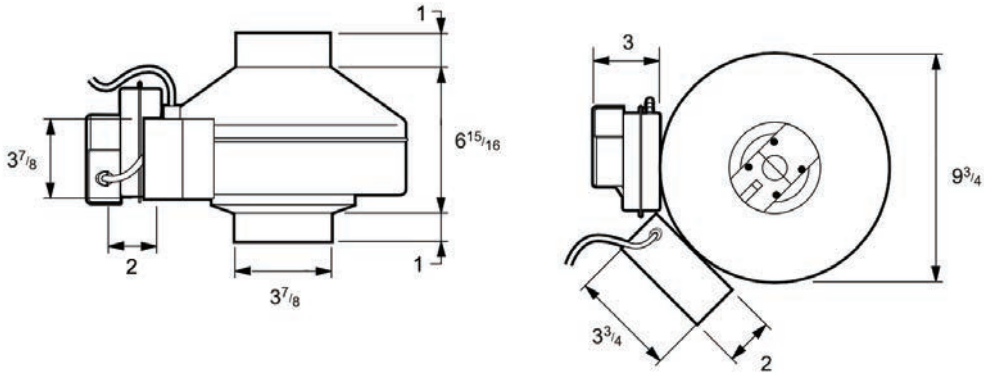

| Model | Metal Gauge | Weight |
|----------|-------------|--------|
| DBF 4XLT | 22 | 10 |

All dimensions in inches. Weights in pounds.


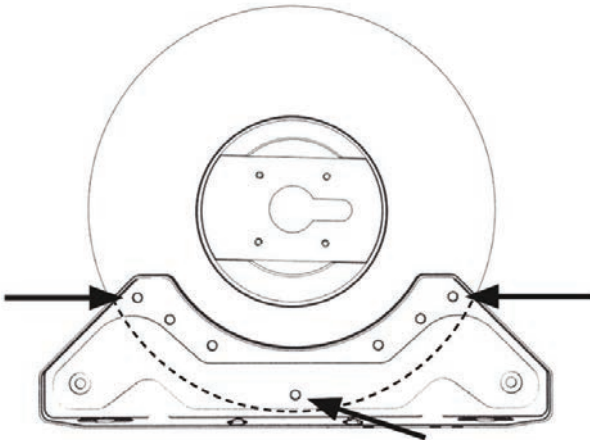


Figure 1.4

Mounting Bracket and Screw Locations

***Using the wrong length screws
will damage the fan impeller***



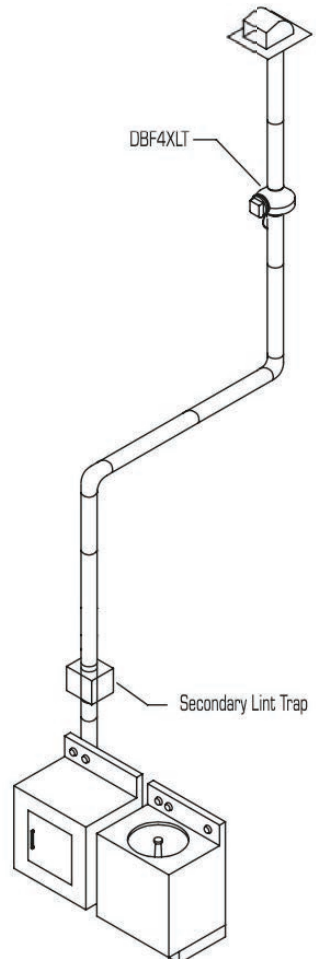

SPTD

MODEL

SPTD Inline Mixed Flow Fan

FEATURES

- In-line duct fans specially designed to maximize airflow performance with minimal noise levels
- Include the combination of a powerful motor, factory installed, to a mixed flow impeller
- All models include a removable body feature that enables the motor-impeller assembly to be completely removed or replaced without the need to interfere with the attached duct
- Low profile fans manufactured in plastic (up to model 150) or in galvanized steel sheet protected with Epoxy paint (models 200, 250, 315, 355 and 400)
- Models 250 and 315 are UL Listed for outdoor use
- Models 355 and 400 are UL 705 certified
- Models 150S and 200S are silent fans
- Permanently lubricated motors are engineered for trouble-free, continuous operation for 40,000 hours.



WEB SEARCH: SPTD

MODELS AVAILABLE

| | |
|----------|----------|
| SPTD100 | SPTD200S |
| SPTD100X | SPTD250 |
| SPTD125 | SPTD315 |
| SPTD150 | SPTD355 |
| SPTD150S | SPTD400 |
| SPTD200 | |

Performance characteristics

Models 250 and 315 include a direct single speed motor connection.

| Model | Nom. RPM | Volts | Max. Watts | Speed | CFM v Static Pressure (SP) Ins. WG | | | | | | | Max. SP | Max operating temp. (°F) | Wgt. (lbs) | Duct Dia. Ins. |
|----------|----------|-------|------------|-------|------------------------------------|--------|-------|--------|------|-------|------|---------|--------------------------|------------|----------------|
| | | | | | 0" | 0.125" | 0.25" | 0.375" | 0.5" | 0.75" | 1.0" | | | | |
| TD-100 | 2516 | 120 | 26 | - | 101 | 85 | 57 | - | - | - | - | .4 | 104 | 4 | 4" |
| TD-100x1 | 2500 | 120 | 29 | - | 138 | 119 | 96 | 66 | 21 | - | - | .45 | 104 | 6 | 4" |
| TD-125 | 2146 | 120 | 38 | - | 197 | 168 | 133 | 86 | 22 | - | - | .55 | 104 | 6 | 5" |
| TD-150 | 2289 | 120 | 65 | - | 293 | 273 | 250 | 227 | 206 | 131 | 35 | 1.15 | 140 | 9 | 6" |
| TD-200 | 2781 | 120 | 184 | - | 538 | 495 | 458 | 418 | 367 | 190 | 10 | 1.625 | 104 | 13 | 8" |
| TD-250 | 2400 | 120 | 162 | LS | 541 | 475 | 418 | 355 | 295 | 218 | 170 | 2.03 | 140 | 21 | 10" |
| | 3200 | 120 | 241 | HS | 754 | 715 | 680 | 640 | 606 | 520 | 405 | 2.53 | 140 | 21 | 10" |
| TD-315 | 2000 | 120 | 208 | LS | 751 | 670 | 545 | 420 | 285 | 190 | 130 | 1.62 | 140 | 31 | 12.4" |
| | 2500 | 120 | 335 | HS | 1050 | 990 | 932 | 850 | 770 | 600 | 420 | 2.95 | 140 | 31 | 12.4" |
| TD-355 | 1536 | 120 | 522 | - | 2089 | 2013 | 1934 | 1855 | 1775 | 1591 | 1306 | 1.0 | 140 | 68 | 14" |
| TD-400 | 1559 | 120 | 916 | - | 3124 | 3032 | 2936 | 2836 | 2733 | 2505 | 2210 | 1.2 | 140 | 78 | 16" |

Performance certified is for installation Type D: Ducted Inlet, Ducted Outlet. Performance ratings do not include the effects of appurtenances.

Dimensions (inches/mm)

| Model | X | A | B | C | D | E | F | G | H |
|----------|----------------|-----------------|-----------------|----------------|----------------|----------------|--------------|----------------|--------------|
| TD-100 | 5 15/16 151 | 9 1/8 232 | 5 7/16 138 | 3 3/4 96 | 3 7/8 98 | 3 1/4 82 | 3 3/4 95 | 1 7/8 48 | 2 1/16 52 |
| TD-100x1 | 7 3/8 188 | 11 15/16 303 | 6 15/16 176 | 4 1/2 115 | 3 13/16 97 | 3 5/16 100 | 3 9/16 90 | 3 1/8 80 | 2 3/8 60 |
| TD-125 | 7 3/8 188 | 10 3/16 258 | 6 15/16 176 | 4 1/2 115 | 4 13/16 123 | 3 15/16 100 | 3 9/16 90 | 3 1/8 80 | 2 3/8 60 |
| TD-150 | 8 3/8 212 | 11 5/8 295 | 7 7/8 200 | 5 127 | 5 13/16 147 | 4 7/16 112 | 5 1/8 130 | 3 1/8 80 | 2 3/8 60 |
| TD-200 | 9 3/16 233 | 11 7/8 302 | 8 9/16 217 | 5 9/16 141 | 7 13/16 198 | 4 7/8 124 | 5 1/2 140 | 3 15/16 100 | 3 1/8 94 |
| TD-250 | 11 7/16 291 | 15 3/16 386 | 10 11/16 272 | 7 9/16 192 | 9 3/4 248 | 6 1/8 155 | 6 5/8 168 | 5 1/8 145 | 5 1/2 140 |
| TD-315 | 14 356 | 17 11/16 450 | 13 1/4 336 | 8 13/16 224 | 12 5/16 312 | 7 3/8 188 | 8 1/4 210 | 7 2/8 182 | 7 178 |

| Model | A | B | C | D | E | F | G | H | I | J | K |
|--------|-----------------|----------------|---------------|----------------|----------------|-----------------|---------------|---------------|-----------------|----------------|-------------|
| TD-355 | 14 13/16 376 | 9 3/8 238 | 17 3/4 451 | 8 13/16 224 | 16 3/4 425 | 13 13/16 354 | 6 5/16 160 | 14 1/2 368 | 18 11/16 475 | 13 3/8 340 | 5 1/16 8 |
| TD-400 | 16 407 | 9 13/16 249 | 19 3/8 492 | 10 1/2 267 | 19 3/16 487 | 15 11/16 398 | 6 5/16 160 | 16 3/4 425 | 21 1/2 546 | 14 9/16 370 | 5 1/16 8 |

FTRN2

Standard Motor Radon Fan



FANS | RADON FANS

FTRN2



FTRN2

MODEL


FTRN2 Radon Fan

FEATURES

- Use for medium suction, low airflow applications
- UV resistant, UL Listed durable plastic
- UL Listed for use in commercial applications
- Watertight electrical terminal box
- Totally enclosed protection
- Automatic reset thermal overload protection
- Zero leakage
- Employ specialized fans to exhaust radioactive radon gas from underneath building structures via a sealed pipe system
- Designed to remove radon gas before it migrates into the building envelope
- RN2 is an ideally tailored performance curve for a vast majority of your mitigations that require medium airflow and suction.
- Fan can be mounted indoor, outdoor, and in wet locations.
- Performance certified by HVI
- Safety certified by UL




WEB SEARCH: FTRN2

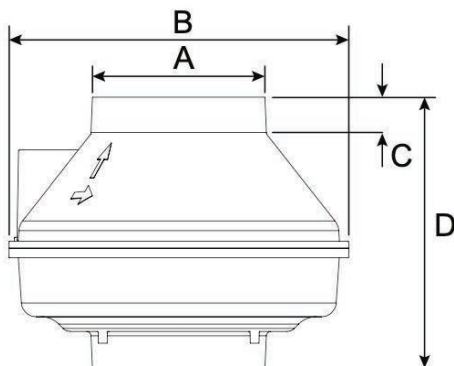

Fan Dimensions

| | |
|---|---------|
| A | 4 15/32 |
| B | 10 |
| C | 1 1/4 |
| D | 9 1/4 |

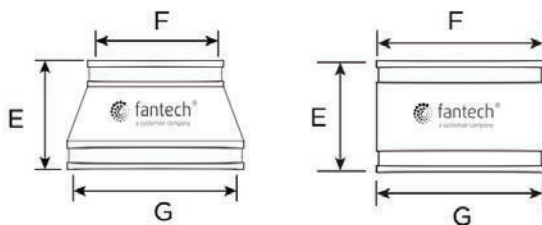

Coupling Dimensions

| | 4x3 | 4x4 |
|---|-------|-------|
| E | 4 | 4 |
| F | 3 1/2 | 4 1/2 |
| G | 4 1/2 | 4 1/2 |

| Model | Couplers (Sold Separately) | Fan Style | Pressure Category | Application Pressure Range (in w.c.) | Max Pressure (in w.c.) | Electrical (V - ~ - Hz) | Rated Power | RRNC 2.0 Fan Type |
|-------|-------------------------------|-----------|-------------------|---|---------------------------|----------------------------|-------------|-------------------|
| FTRN2 | FNGREY04x03 FNWHITE04x04 | Inline | Med-Low | 0.0 - 1.8 | 1.99 | 120 - 1 - 60 | 67 | RF1 & RF2 |

FTRN3

Standard Motor Radon Fan



FANS | RADON FANS

FTRN3



FTRN3

MODEL


FTRN3 Radon Fan

FEATURES

- Use for medium suction, low airflow applications
- UV resistant, UL Listed durable plastic
- UL Listed for use in commercial applications
- Watertight electrical terminal box
- Totally enclosed protection
- Automatic reset thermal overload protection
- Zero leakage
- Employ specialized fans to exhaust radioactive radon gas from underneath building structures via a sealed pipe system
- Designed to remove radon gas before it migrates into the building envelope
- RN3 is an excellent choice for systems with elevated radon levels, poor communication, multiple suction points and/or large sub slab footprint. High airflow, medium suction.
- Fan can be mounted indoor, outdoor, and in wet locations.
- Performance certified by HVI
- Safety certified by UL




WEB SEARCH: FTRN3

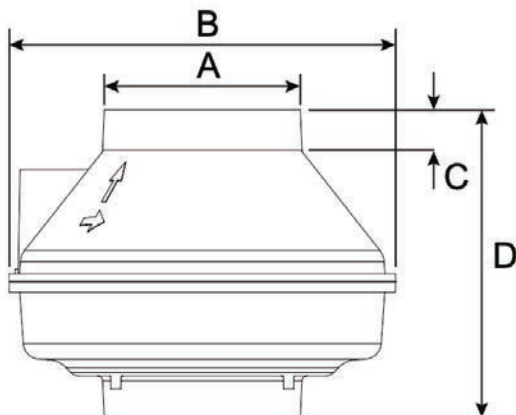

Fan Dimensions

| | |
|---|--------|
| A | 5 7/8 |
| B | 11 1/2 |
| C | 1 1/4 |
| D | 9 1/4 |



Coupling Dimensions

6x3 6x4

| | | |
|---|-------|-------|
| E | 4 | 4 |
| F | 3 1/2 | 4 1/2 |
| G | 6 | 6 |

| Model | Couplers (Sold Separately) | Fan Style | Pressure Category | Application Pressure Range (in w.c.) | Max Pressure (in w.c.) | Electrical (V - ~ - Hz) | Rated Power | RRNC 2.0 Fan Type |
|-------|-------------------------------|-----------|-------------------|--------------------------------------|------------------------|-------------------------|-------------|-------------------|
| FTRN3 | FNGREY06x03 FNWHITE06x04 | Inline | Med-High | 0.0 - 2.2 | 2.36 | 120 - 1 - 60 | 141 | RF1 & RF2 |

FTRN4EC3 / FTRN4EC4

ECM Motor Radon Fan



FANS | RADON FANS

FTRN4EC3 / FTRN4EC4



FTRN4EC3

FTRN4EC4

MODEL

FTRN4EC3 ECM Motor Radon Fan


FTRN4EC4 ECM Motor Radon Fan

FEATURES

- Use for High Suction, High Airflow applications
- sipped with EC Motor
- Speed Control Included
- LDVI™ Couplings Included
- Airtight Housing Guaranteed
- Large Electrical Box
- Zero Leakage
- The most powerful model of radon mitigation fans, the RN4EC can create 4.3" of suction while moving 20cfm, as well as move 490 cfm when operating at only 0.5" suction.
- High airflow, high suction
- Integrated control system allows for "dialing in" the fan speed necessary to achieve either the required sub-slab depressurization or required system air flow rate
- Performance certified by HVI
- Safety certified by UL




WEB SEARCH: FTRN4EC3 / FTRN4EC4

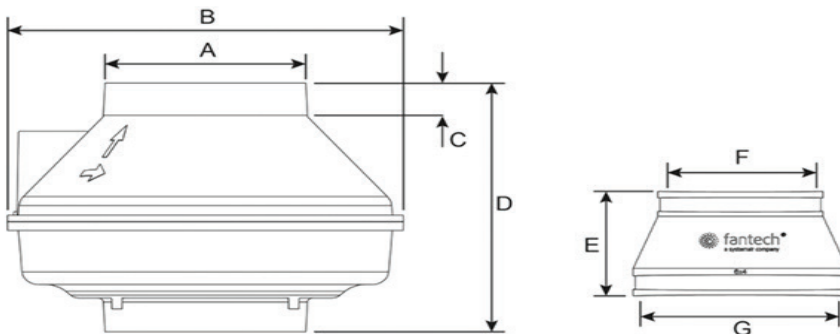

| Model | A | B | C | D | E | F | G |
|---------|---------------|--------------|------------|-------------|---------|-------------|---------|
| Rn2EC | 4 15/32 (114) | 10 (254) | 1 1/4 (32) | 9 1/4 (235) | - | - | - |
| Rn4EC-3 | 5 7/8 (149) | 11 1/2 (292) | 1 1/4 (32) | 9 1/4 (235) | 4 (102) | 3 1/2 (89) | 6 (152) |
| Rn4EC-4 | 5 7/8 (149) | 11 1/2 (292) | 1 1/4 (32) | 9 1/4 (235) | 4 (102) | 4 1/2 (114) | 6 (152) |

Dimensions in inches (mm).

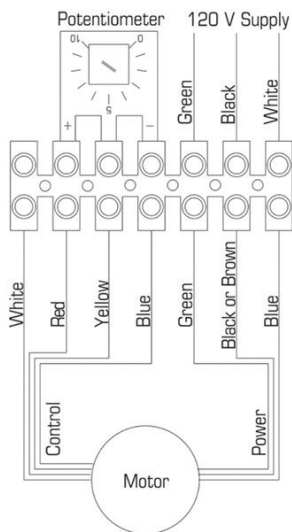

FIL1M8PL

1" MERV 8 Pleated Filters



INDOOR AIR QUALITY | FILTERS

FIL1M8PL



FIL1M8PL

MODEL

FIL1M8PL 1" MERV 8 Pleated Filters

FEATURES

- MERV 8 RATED
- 1" depth
- These are made for our filter grilles
- Nominal dimensional and filters are .5" undersized (ex. 10x10x1 filter is 9.5x9.5x.75)
- Custom filters can be ordered up to 36x36
- Comes as a case of 12 filters

| Characteristics | Pleated Filters |
|---------------------|---|
| Filter Media | 100% synthetic gradient media |
| Filter Support Grid | 30 gauge galvanized expanded metal grid |
| Frame | Moisture resistant double wall beverage board |
| Assembly Technique | Media pack totally bonded to frame |
| Max. Temperature | 180°F (82°C) continuous service / Peaks 225°F (107°C) |
| Max. Humidity | Resistant to 100% R.H. |
| Flammability | U.L. 900 |




WEB SEARCH: FIL1M8PL

FIL1M8PL

Width

Height

| | 8 | 10 | 12 | 14 | 16 | 18 | 20 | 22 | 24 | 25 | 26 | 28 | 30 | 32 | 36 |
|----|---|----|----|----|----|----|----|----|----|----|----|----|----|----|----|
| 6 | | X | X | X | | | | | X | | | | X | | X |
| 8 | X | | X | X | X | X | X | | X | | | | X | | X |
| 10 | | X | X | X | X | X | X | | X | | | | X | | X |
| 12 | | | X | X | X | X | X | | X | X | | | X | | X |
| 14 | | | | X | X | X | X | X | X | X | | X | X | | X |
| 15 | | | | | | | X | | | | | | | | |
| 16 | | | | | X | X | X | | X | X | | X | X | | |
| 18 | | | | | | X | X | X | X | X | | | X | | X |
| 20 | | | | | | | X | X | X | X | | | X | X | |
| 22 | | | | | | | | X | X | | | | | | |
| 24 | | | | | | | | | X | | | | X | | |
| 25 | | | | | | | | | | X | | | X | | |
| 26 | | | | | | | | | | | X | | | | |
| 30 | | | | | | | | | | | | | X | | |

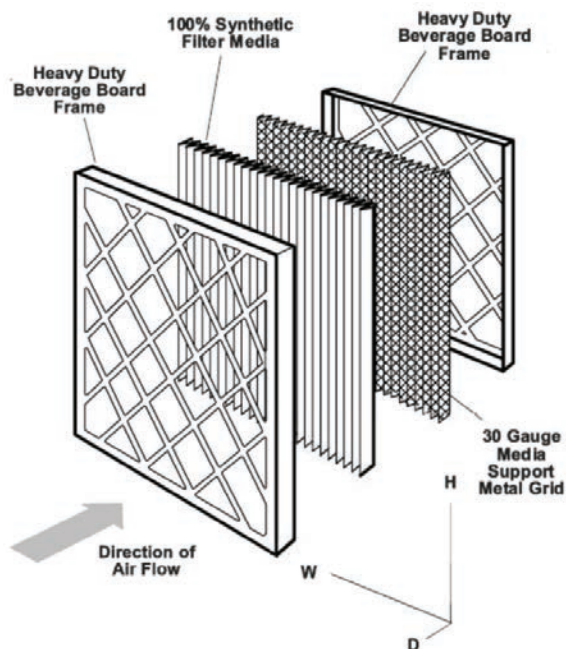

FIL2M8PL

2" MERV 8 Pleated Filters



INDOOR AIR QUALITY | FILTERS

FIL2M8PL



FIL2M8PL

MODEL

FIL1M8PL 2" MERV 8 Pleated Filters

FEATURES


- MERV 8 RATED
- 2" depth
- These are made for our filter grilles
- Nominal dimensional and filters are .5" undersized (ex. 10x10x2 filter is 9.5x9.5x1.5)
- Custom filters can be ordered up to 36x36
- Comes as a case of 12 filters

| Characteristics | Pleated Filters |
|---------------------|---|
| Filter Media | 100% synthetic gradient media |
| Filter Support Grid | 30 gauge galvanized expanded metal grid |
| Frame | Moisture resistant double wall beverage board |
| Assembly Technique | Media pack totally bonded to frame |
| Max. Temperature | 180°F (82°C) continuous service / Peaks 225°F (107°C) |
| Max. Humidity | Resistant to 100% R.H. |
| Flammability | U.L. 900 |



WEB SEARCH: FIL2M8PL

| FIL2M8PL | | Width | | | | | | | | |
|----------|----|-------|----|----|----|----|----|----|----|----|
| Height | | 15 | 16 | 18 | 20 | 22 | 24 | 25 | 27 | 30 |
| | 12 | | | | | | X | | | |
| | 14 | X | | | X | | | X | | |
| | 15 | | | | X | | | X | | |
| | 16 | | X | | X | | X | | | X |
| | 18 | | | X | | | X | | | |
| | 20 | | | | X | X | X | X | | X |
| | 22 | | | | | | | | X | |
| | 24 | | | | | | X | | | |
| | 25 | | | | | | | X | | |
| | 30 | | | | | | | | | X |

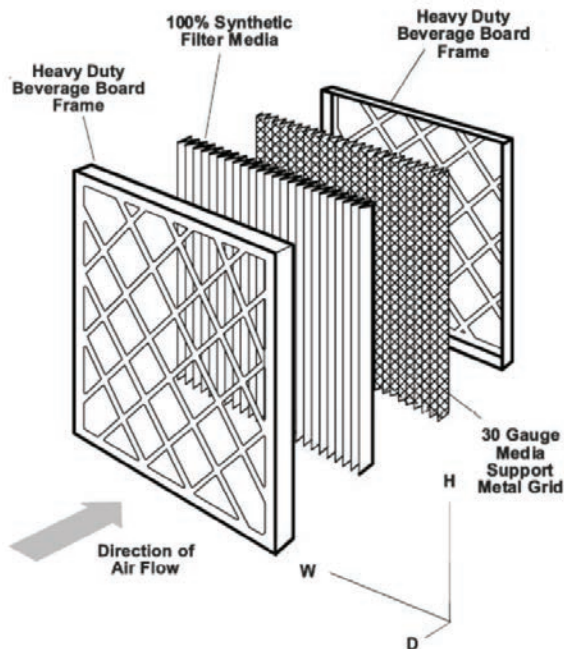

FIL4M8PL

4" MERV 8 Pleated Filters



INDOOR AIR QUALITY | FILTERS

FIL4M8PL



FIL4M8PL

MODEL

FIL4M8PL 4" MERV 8 Pleated Filters

FEATURES


- MERV 8 RATED
- 4" depth
- These are made for our filter grilles
- Nominal dimensional and filters are .5" undersized (ex. 10x10x4 filter is 9.5x9.5x3.5)
- Custom filters can be ordered up to 36x36
- Comes as a case of 6 filters

| Characteristics | Pleated Filters |
|---------------------|---|
| Filter Media | 100% synthetic gradient media |
| Filter Support Grid | 30 gauge galvanized expanded metal grid |
| Frame | Moisture resistant double wall beverage board |
| Assembly Technique | Media pack totally bonded to frame |
| Max. Temperature | 180°F (82°C) continuous service / Peaks 225°F (107°C) |
| Max. Humidity | Resistant to 100% R.H. |
| Flammability | U.L. 900 |



WEB SEARCH: FIL4M8PL

| FIL4M8PL | | Width | | |
|----------|----|-------|----|----|
| Height | | 20 | 24 | 25 |
| | 12 | | X | |
| | 16 | X | | X |
| | 20 | X | X | X |
| | 24 | | X | |

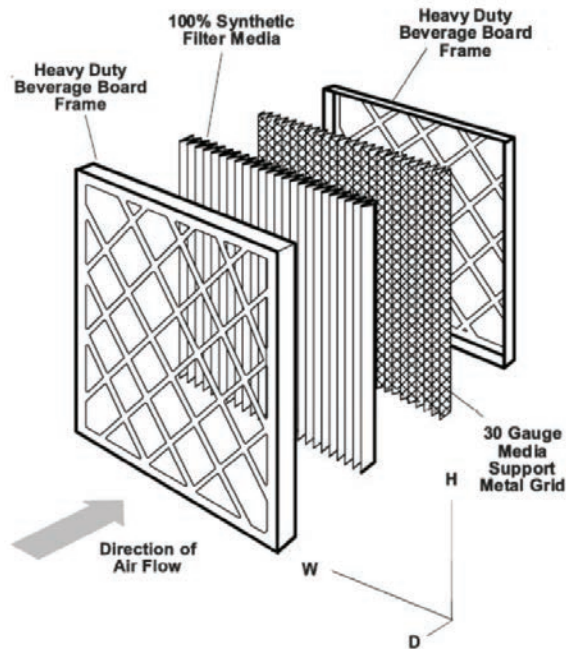

FIL1PEF

Washable Filter



INDOOR AIR QUALITY | FILTERS

FIL1PEF



FIL1PEF

MODEL

FIL1PEF Permanent Washable Filter


FEATURES

- Electrostatic air filtration is a permanent, cost effective way to significantly improve the quality of your air in residential applications
- 1" depth
- Stainless steel frame with drain holes
- Average arrestance efficiency: 82%
- Dust holding capacity: 105gm
- Initial air flow resistance: 0.11" w.g.
- 1/2" undersized
- UL Classified as to flammability only
- Lifetime warranty



WEB SEARCH: FIL1PEF

| Height | FIL1PEF | Width | |
|--------|---------|-------|----|
| | | 20 | 25 |
| | 14 | X | X |
| | 16 | X | X |
| | 20 | X | X |

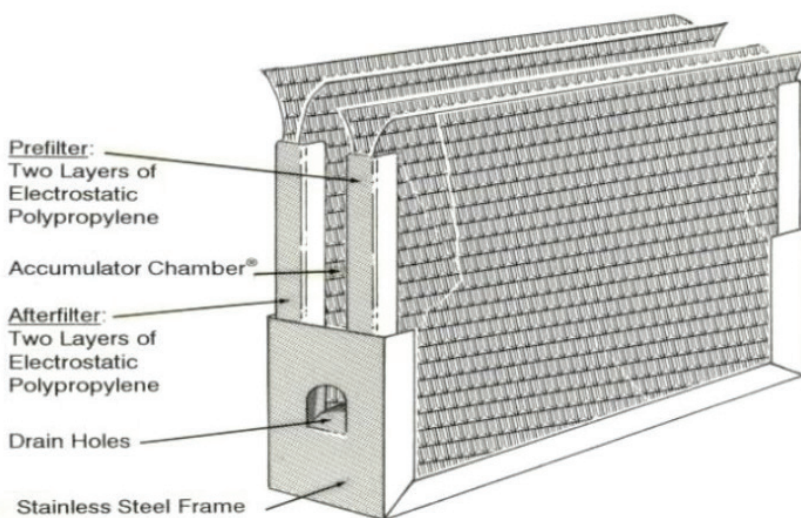

AO2400

Air Purifier



INDOOR AIR QUALITY | AIR PURIFICATION

AO2400



AO2400

MODEL


AO2400 Air Purifier

FEATURES

- Cold plasma generator that installs into almost any air conditioning unit
- Negative and positive ions quickly reduce harmful volatile organic compounds (VOCs), particulates, smoke, pollen, dust, mold, bacteria viruses and static electricity.
- Can be mounted ceiling mount, wall hung, furnace and PTAC installations
- Working temp: 0° - 150°
- Coverage up to 2,400 CFM (6 tons)
- Material is made of polymer
- 3 year limited warranty
- Made in the USA



WEB SEARCH: AO2400

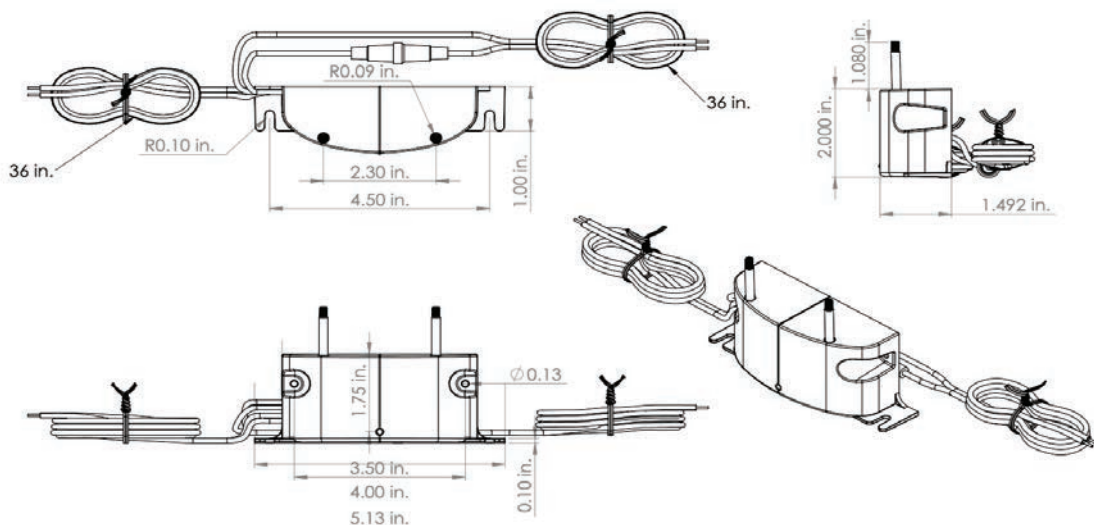

Contaminant Removal Rate Results

| | Removal Rate |
|--|--------------|
| E. Coli | Up to 99.68% |
| VRE | Up to 99.00% |
| Air borne mold reduction | Up to 99.00% |
| E. faecium reduction | Up to 99.00% |
| Formaldehyde reduction | Up to 99.00% |
| TVOC reduction | Up to 99.00% |
| H5N1 & H1N1 reduction | Up to 99.00% |
| Feline Coronavirus reduction | Up to 99.00% |
| Coxsackie Virus reduction | Up to 99.00% |
| MRSA (STAPH) | Up to 96.24% |
| Air borne particulate & allergen reduction | Up to 90.00% |
| C. Diff | Up to 86.87% |
| (CDIFF) reduction | Up to 86.00% |
| M. terrae (TB surrogate) | Up to 69.09% |

UVC ADVANTAGE

UV Lights



INDOOR AIR QUALITY | AIR PURIFICATION

UVADV1224T3 / UVADV1724T3



UVADV1224T3
UVADV1724T3

MODEL

UVADV1224T3 UV Light
UVADV1724T3 UV Light

FEATURES

- Compact, one piece UV light for a new level of convenience and versatility in HVAC disinfection
- The size allows this light to be fit just about anywhere
- 12" and 17" bulbs available
- Prevents the bio-film that insulates cooling coils and degrades cooling
- Keeps HVAC components clean and therefore optimizes operating efficiency 24/7
- With your HVAC system always running like-new efficiency, you will minimize your electricity costs
- Keeps drain pans and drain lines clear of mold, fungus and bacteria
- Stops HVAC dirty-sock smell
- Allergy relief! Reduces or eliminates allergens generated inside the air conditioner



WEB SEARCH: UVADV1224T3 / UVADV1724T3


UVC Advantage with T3™ 2-year module



40% more UV, lasts 2x longer!



T3™ Technology thermally optimizes lamp performance for up to 40% more UV intensity without any additional power consumption, and doubles unit life to 18,000 hours before replacement is needed!



1-Year Advantage—replaced annually

UVC-Advantage for HVAC disinfection



Equipped with standard UV lamp with 9,000 hour life span before replacement is required.

DH75 / DH100

Dehumidifiers



INDOOR AIR QUALITY | DEHUMIDIFIERS

GADH75 / GADH100



GADH75
GADH100

MODEL

GADH75 Dehumidifier

GADH100 Dehumidifier

FEATURES

- 120 volt whole house dehumidifier
- Attaches to your existing ductwork to dehumidify the entire home or business automatically
- Maintenance consists of replacing the air filter on an as needed basis
- MERV 11 filter included
- DH75 removes up to 75 pints per day
- DH100 removes up to 100 pints per day
- Touch screen wifi control display on both models
- Fan only function
- Integrated handles
- Filter change reminder
- Compact design
- Equipped with the newest safety standard



WEB SEARCH: GADH75 / GADH100

MODEL

UA70H Dehumidifier
 UASFCOMPACT70 Dehumidifier
 UA98H Dehumidifier
 UA120H Dehumidifier
 UA120V Dehumidifier
 UAMD33 In-Wall Dehumidifier
 UAXT155H Dehumidifier
 UAXT205H Dehumidifier

FEATURES

When your home has too much moisture, it becomes a breeding ground for pests and a trigger for indoor pollutants such as dust, pollen, mold spores and bacteria. It can put your home's structural integrity, as well as your comfort at risk.

We offer and stock many different types of Santa Fe dehumidifiers that are ready to fit your specific needs. Scan the QR code below to visit our website and see a complete list of products we offer.



UASFCOMPACT70



UAMD33



UA98H

INDOOR AIR QUALITY | DEHUMIDIFIERS

SANTA FE

WEB SEARCH: SANTA FE



FTHS300

HERO HEPA Filtration System



INDOOR AIR QUALITY | HEPA FILTRATION

FTHS300



FTHS300

MODEL

FTHS300 HERO HEPA Filtration System


FEATURES

- Comes with 2 different mounting methods
- Can be installed in a conditioned space or an undontioned space (because it is insulated)
- Can be duct mounted or directly to any furnace / air handler with a relay switch activating the unit on.
- Built in motor
- 3 step filters
- Removable 5' cord and 3-prong plug
- Duct Size – 8" (203 mm) for round collar
OR – (2) 3-3/4" x 16" (95mm x 406 mm) rectangular (flair system)
- Weight – 28 lbs (12.7 Kg)
- Voltage/ Phase – 120V / 1~
- Power rated – 180 W
- Amp – 1.5 amps
- Average Airflow – 280 cfm (132 L/s)
@ 0 " Ps



WEB SEARCH: FTHS300

Dimensions

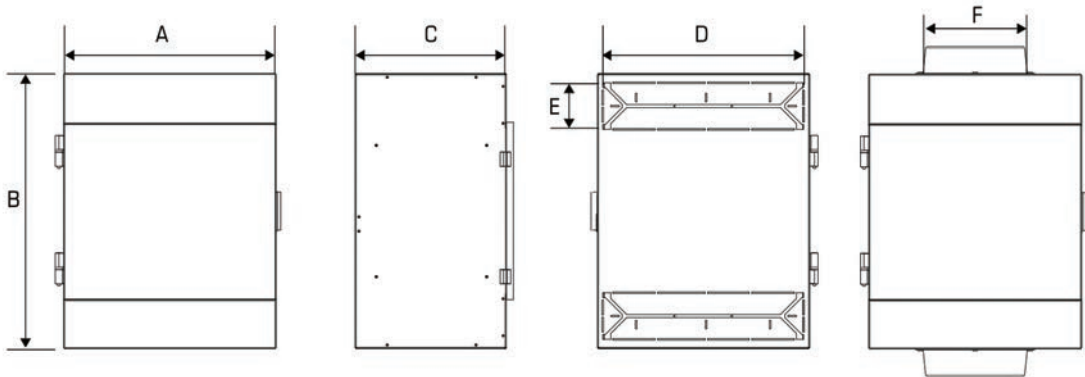

| Model | A | | B | | C | | D | | E | | F (Duct Size) | |
|------------|----|-----|----|-----|----|-----|----|-----|-------|----|---------------|-----|
| | in | mm | in | mm | in | mm | in | mm | in | mm | in | mm |
| HERO HS300 | 17 | 431 | 22 | 557 | 12 | 307 | 16 | 406 | 3 3/4 | 95 | 8 | 201 |

TECHNICAL SPECIFICATIONS HERO HS300

Average airflow 280 cfm (132 L/s)*
(cfm (L/s) @ 0.4" in.wg.)

Voltage / Phase (V/~) 120V / 1~

Duct connection size (in (mm)) 8" (203 mm)

Rectangular Flair 3-3/4" x 16" (95mm x 406 mm)

Rated power (W) 180 W

Max current (A) 1.5 amps

Height (in (mm)) 22 (557)


Depth (in (mm)) 12 (307)

Width (in (mm)) 17 (431)


Shipping weight (lbs (Kg)) 28 lbs (12.7 Kg)

*Average airflow (@ 0" Ps.)

DUCTING FLAIR SYSTEM (Hepa Mounted on Duct)



COLLAR MOUNT SYSTEM (Hepa Mounted on Wall)




RVE

Retro / Bypass Terminal Unit



TERMINAL UNITS | RETRO

RVE



RVE

MODEL

RVE Retro / Bypass Terminal Unit

FEATURES

- Control enclosure
- 22 gauge steel construction
- Stocked with K4 Lineacross Sensor

OPTIONS

- 304 / 316 stainless cabinets
- Toggle disconnect
- Transformer
- Thermostat
- 20 gauge steel construction
- Linear averaging airflow sensor

CONTROL OPTIONS


- Pneumatic stocked
- DDC supplied by others, mounted in our shop



WEB SEARCH: RVE

| Size | CFM Max | CFM Min |
|------|---------|---------|
| 6" | 515 | 89 |
| 8" | 920 | 159 |
| 10" | 1430 | 248 |
| 12" | 2060 | 357 |
| 14" | 2800 | 486 |
| 16" | 3660 | 634 |

RVE UNIT WITH ELECTRONIC CONTROLS, INLET & SIDE VIEWS

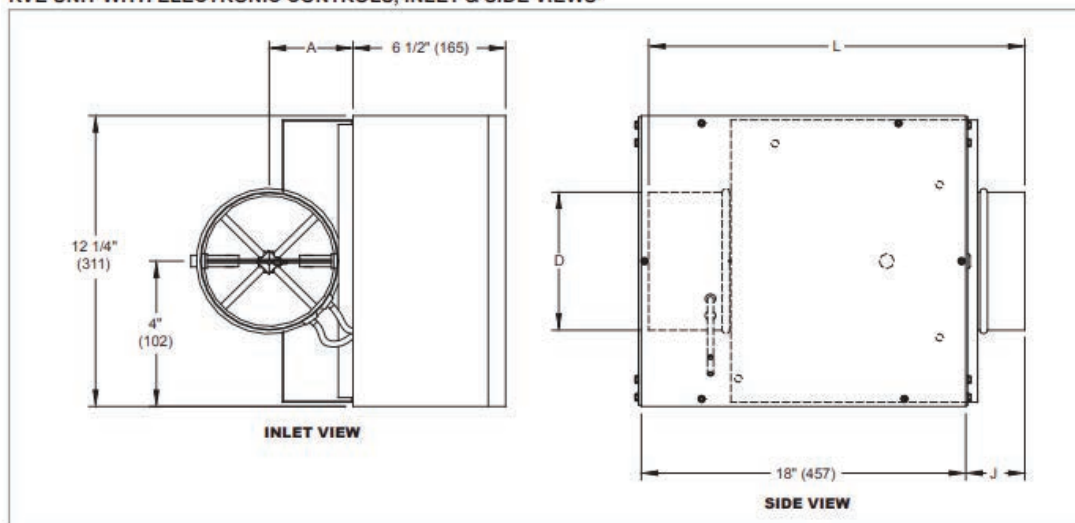

RVE UNIT WITH ELECTRONIC CONTROLS, DIMENSIONAL DETAILS

| Unit Size | Max. CFM [L/s] | A | D | J | L |
|-----------|----------------|---------------|---------------|----------------|-----------|
| 4 | 230 [109] | 3 9/16" (90) | 3 7/8" (98) | 11/32" (9) | 18" (457) |
| 6 | 515 [243] | 3 9/16" (90) | 5 7/8" (149) | 11/32" (9) | 16" (406) |
| 8 | 920 [434] | 4 9/16" (116) | 7 7/8" (200) | 11/32" (9) | 16" (406) |
| 10 | 1430 [675] | 5 9/16" (141) | 9 7/8" (251) | 2 11/32" (60) | 20" (508) |
| 12 | 2060 [972] | 6 9/16" (167) | 11 7/8" (302) | 2 11/32" (60) | 20" (508) |
| 14 | 2800 [1321] | 7 9/16" (192) | 13 7/8" (352) | 4 11/32" (110) | 24" (610) |
| 16 | 3660 [1727] | 8 9/16" (217) | 15 7/8" (403) | 4 11/32" (110) | 24" (610) |


RA-500

Retro Valve



TERMINAL UNITS | RETRO

RA-500



RA-500

MODEL

RA-500 Retro Valve

FEATURES

The Performance Aire Series RA-500 retrofit assemblies are customized retrofit valves designed to slip into existing mechanically regulated single or dual duct terminals. The units allow the conversion of constant volume systems to more energy efficient, variable volume systems.

RA-500 assemblies are currently available to fit most brands or terminals manufactured from the 1960s to the present. Units are installed by removing existing volume regulators and inserting the RA valve

CONTROL OPTIONS

- Pneumatic stocked
- DDC supplied by others, mounted in our shop



SIZES AVAILABLE

| | |
|-----|-----|
| 6" | 12" |
| 8" | 14" |
| 10" | |



WEB SEARCH: RA-500

| Part Number | Size | A | B | C | D |
|-------------|------|--------|--------|--------|------|
| RA50006 | 6 | 5.870 | 12.000 | 13.083 | 14.5 |
| RA50008 | 8 | 7.870 | 12.000 | 13.083 | 15.5 |
| RA50010 | 10 | 9.870 | 12.000 | 13.083 | 16.5 |
| RA50012 | 12 | 11.870 | 18.000 | 19.083 | 20.5 |
| RA50014 | 14 | 13.870 | 18.000 | 19.083 | 21.5 |

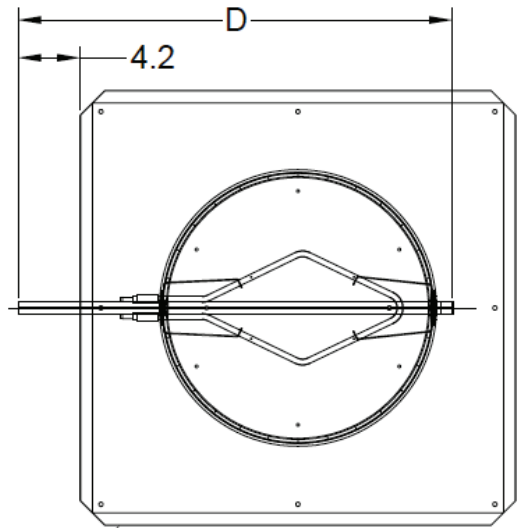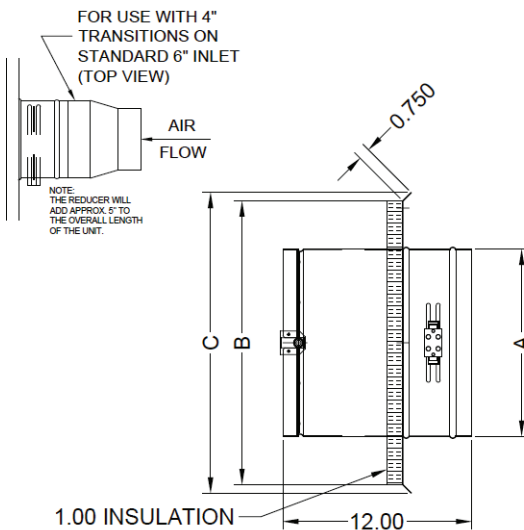


LMHS

Single Duct VAV Box



TERMINAL UNITS | SINGLE DUCT

LMHS

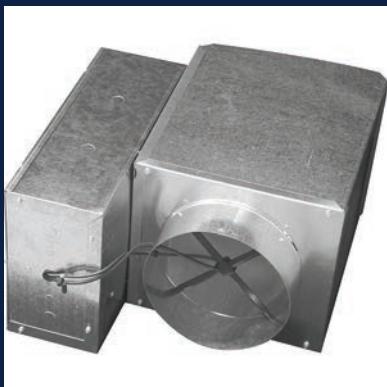

LMHS

MODEL

LMHS Single Duct VAV Box

FEATURES

- 22 gauge steel case
- Control enclosure
- Round intake and square discharge
- Standard 1/2" fiberglass liner or doublewall construction
- K4 Lineacross airflow sensor
- Gasketed access door
- Stocked as cooling only or with 1 or 2 row hot water coils

OPTIONS BY ORDER

- 20 gauge steel cabinet
- Electric heat
- 306 / 317 stainless cabinet
- Transformers
- Various insulation liners

CONTROL OPTIONS


- Pneumatic stocked
- DDC supplied by others, mounted in our shop



WEB SEARCH: LMHS

| Size | CFM Max | CFM Min |
|------|---------|---------|
| 6" | 515 | 89 |
| 8" | 920 | 159 |
| 10" | 1430 | 248 |
| 12" | 2060 | 357 |
| 14" | 2800 | 486 |
| 16" | 3660 | 634 |

BASE UNIT | DIMENSIONAL DATA

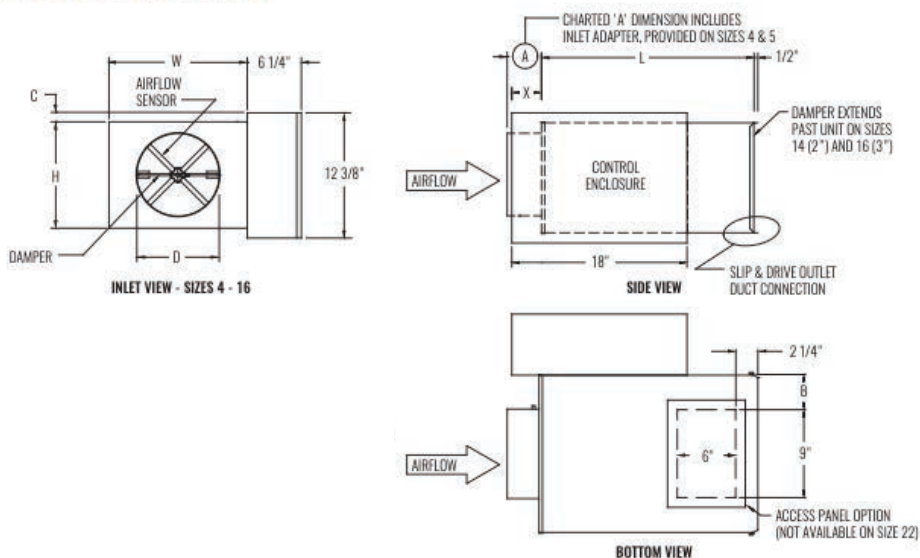

| INLET SIZE | MAX CFM [L/s] | L | W | H | A | B | C | D | X |
|------------|---------------|---------|-----|---------|--------|--------|--------|---------|--------|
| 6 | 515 [243] | 15 1/2" | 12" | 8" | 3 3/8" | 1 1/2" | 2 1/8" | 5 7/8" | 7 1/4" |
| 8 | 920 [434] | 15 1/2" | 12" | 10" | 3 3/8" | 1 1/2" | 1 1/8" | 7 7/8" | 7 1/4" |
| 10 | 1430 [675] | 15 1/2" | 14" | 12 1/2" | 3 3/8" | 2 1/2" | - | 9 7/8" | 5 1/4" |
| 12 | 2060 [972] | 15 1/2" | 16" | 15" | 3 3/8" | 3 1/2" | - | 11 7/8" | 5 1/4" |
| 14 | 2800 [1321] | 15 1/2" | 20" | 17 1/2" | 3 3/8" | 5 1/2" | - | 13 7/8" | 3 1/4" |
| 16 | 3660 [1727] | 15 1/2" | 24" | 18" | 3 3/8" | 7 1/2" | - | 15 7/8" | 3 1/4" |



QFV

MODEL

QFV Parallel Fan Powered Induction Terminal Unit

FEATURES

- 22 gauge steel case
- Standard with 1/2" liner
- Each unit size offers multiple primary outlets available for flexible design
- Standard linear
- Door locking fused disconnect
- Fuse block for blower
- Filter assembly on return side
- K4 Lineacross airflow sensor
- Fan motor 277/1V
- Fan comes with SCR speed controller
- 480/3 or 277/1 staged electric heat

OPTIONS

- Hotwater coils
- Various insulated choices
- ECM motor controls
- SCR heat
- Sound attenuators
- Constant volume PIU's
- Motor voltage options available:
120, 208/1, 208/3, 230, 277, 480/1


CONTROL OPTIONS

- Pneumatic stocked
- DDC supplied by others, mounted in our shop



WEB SEARCH: QFV

| Inlet | Cabinet Size |
|-------|--------------|
| 6" | 2 |
| 8" | 3 |
| 10" | 4 |
| 12" | 4 |
| 12" | 5 |
| 14" | 5 |

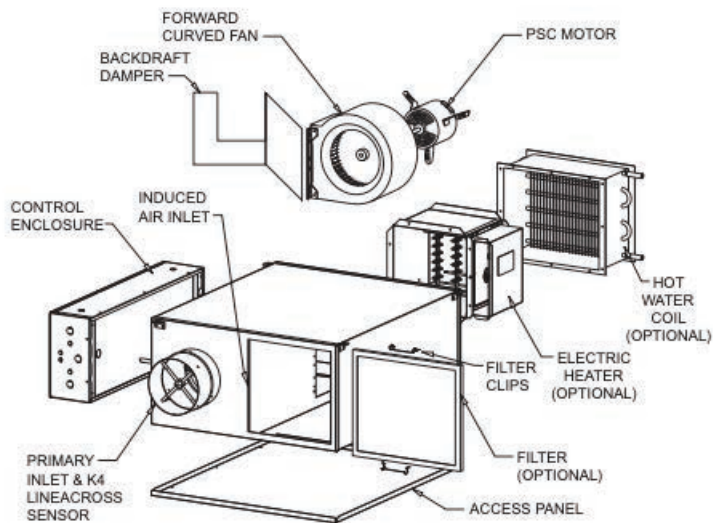

UHIR

Electric Unit Heater



HEATERS | ELECTRIC HEAT

UHIR



UHIR

MODEL

UHIR Electric Unit Heater

FEATURES


- Available in 50 standard models with ratings up to 50 KW at voltages of 208, 240, 277 and 480 single or three-phase.
- Temperature control: Single stage or two stage control with built in or remote mounted thermostats
- Control options are available as factory built-in or field installed to meet job specs
- Custom KW's are available up to 50KW
- Can be mounted for horizontal or vertical discharge using an optional universal wall/ceiling mounting bracket or with field-furnished threaded rods for ceiling mounting
- Color is "Camel"
- Heating elements and motor are enclosed in a heavy gauge galvanized steel cabinet
- Industrial grade, 0.475" diameter steel sheath with brazed copper plated steel fins and epoxy sealed ends. Draw-thru airflow design pulls air across the heating elements to ensure cool element operation and even air distribution resulting in long element life
- Permanently lubricated and thermally protected fan motor

VISIT OUR WEBSITE TO SEE DIFFERENT SIZES AND
OPTIONS WE OFFER, OR CALL US FOR A QUOTE



WEB SEARCH: UHIR

**STOCKED ORDERS RECEIVED BY
3:00 PM WILL SHIP SAME DAY**

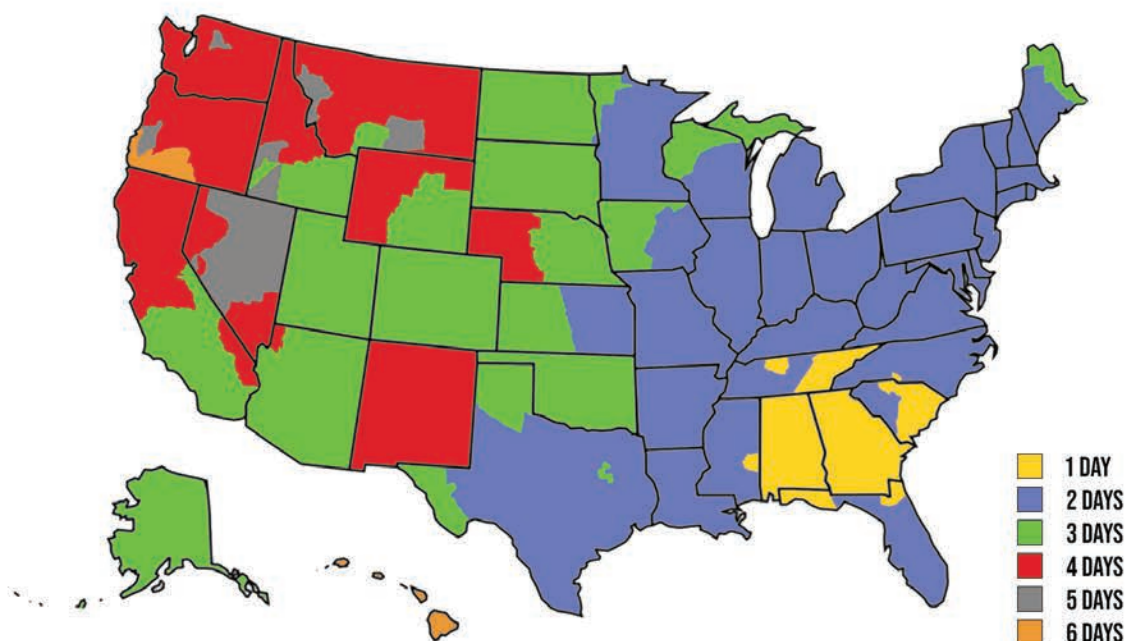

**NO MINIMUMS
NO BROKEN CARTON FEES**

SCAN THE QR CODE FOR OUR RETURN POLICY



1105 SATELLITE BLVD. | SUITE 300 | SUWANEE, GA 30024
678-608-2858 | FAX: 678-608-0781
SALES@JEDCOSUPPLY.COM | JEDCOSUPPLY.COM