

# VIDEO SPLITTER CABLE REFERENCE GUIDE

Thank you for purchasing one of a variety of MANHATTAN® Video Splitter Cables, each designed to provide quick and easy 2-to-1 connections for crystal-clear video transmissions. Each cable in this series supports high-resolution images for dual-display presentations delivered by a single source. (See the connector configuration chart with specs on the back of this guide.)



*Shown:  
Model 307765*

- Delivers a single, high-quality video signal to two displays – ideal for presentations, retail displays and training applications
- Gold-plated connectors with thumbscrews provide maximum connectivity
- Integrated 2-in-1 output design eliminates Y-cable tangles and clutter
- Fully shielded to reduce EMI and other interference sources
- Molded PVC boot and strain relief
- Lifetime Warranty

  
**MANHATTAN**  
BRINGING COMPUTERS TO LIFE

MANHATTAN® offers a complete line of PC Components, Peripherals, Cables and Accessories. Ask your local computer dealer for more information or visit us online at

**[www.manhattan-products.com](http://www.manhattan-products.com)**

Copyright © MANHATTAN


All products mentioned are trademarks or registered trademarks of their respective owners.

MH-VIDSPL-miniQIG-1008-01

## CONNECTOR CONFIGURATIONS

Model #	Contacts	Cable Connectors	With-standing Voltage	Insulation Resistance	Conductive Resistance	Length	Weight
307765	1 VGA 15-pin male; 2 VGA 15-pin female	28 AWG <sup>1</sup>	300 V DC	20 MOhms	3 Ohms	0.3 m (1 ft.)	158.7 g (5.6 oz.)
307772	1 DVI 24+1-pin male; 2 24+1-pin female	30 AWG <sup>1</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	150.2 g (5.3 oz.)
307796	1 DVI 24+5-pin male; 1 DVI 24+5-pin female; 1 VGA 15-pin female	30 AWG <sup>1</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	164.5 g (5.8 oz.)
307802	1 DVI 24+5-pin male; 2 VGA 15-pin female	30 AWG <sup>1</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	144.5 g (5.1 oz.)
307826	1 DVI 24+1-pin male; 1 DVI 24+1-pin female 1 HDMI 19-pin female	30 AWG <sup>2</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	141.7 g (5.0 oz.)
307833	1 HDMI 19-pin male; 2 HDMI 19-pin female	30 AWG <sup>2</sup>	300 V DC	50 MOhms	2 Ohms	0.3 m (1 ft.)	107.7 g (3.8 oz.)
307857	1 HDMI 19-pin male; 2 DVI-D 24+1-pin female	30 AWG <sup>2</sup>	300 V DC	50 MOhms	2 Ohms	0.3 m (1 ft.)	107.7 g (3.8 oz.)
307864	1 HDMI 19-pin male; 1 DVI 24+1-pin female 1 HDMI 19-pin female	30 AWG <sup>2</sup>	300 V DC	50 MOhms	2 Ohms	0.3 m (1 ft.)	116.2 g (4.1 oz.)
307871	1 DVI-I 24+5-pin male; 1 VGA 15-pin female 1 RCA female, RGB	30 AWG <sup>1</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	144.5 g (5.1 oz.)
307994	1 VGA 15-pin male; 1 VGA 15-pin female 1 RCA female, RGB	28 AWG <sup>1</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	150.2 g (5.3 oz.)
308175	1 VGA 15-pin male; 1 VGA 15-pin female 1 DVI-I 24+5-pin female	30 AWG <sup>1</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	164.5 g (5.8 oz.)
308182	1 DVI-D 24+1-pin male; 2 VGA 15-pin female	30 AWG <sup>2</sup>	300 V DC	50 MOhms	2 Ohms	0.3 m (1 ft.)	133.2 g (4.7 oz.)
308199	1 DVI-I 24+5-pin male; 2 DVI-I 24+5-pin female	30 AWG <sup>1</sup>	500 V DC	50 MOhms	1 Ohm	0.3 m (1 ft.)	150.2 g (5.3 oz.)
308205	1 mini-DVI-D 32-pin male; 1 DVI-D 24+5-pin female; HDMI 19-pin female	30 AWG <sup>2</sup>	300 V DC	5 MOhms	10 Ohms	0.3 m (1 ft.)	110.5 g (3.9 oz.)

Source Device:  
DVD player, notebook/  
desktop PC, etc.

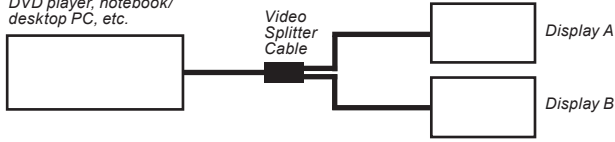

## COMMON SPECIFICATIONS

- |                           |                   |                                |
|---------------------------|-------------------|--------------------------------|
| <b>Certifications</b>     | <b>Contacts</b>   | <b>Cable</b>                   |
| <sup>1</sup> UL           | • Gold-plated     | • Mylar and aluminum shielding |
| <sup>2</sup> UL, HDMI 1.2 | • Molded PVC boot | • Thermal plastic casing       |
|                           | • Shielded        |                                |