

Mini-DVI to DVI-D Adapter

Mini-DVI Male to DVI-D Female

Easily connects a mini-DVI source with DVI-D cable.

The MANHATTAN® Mini-DVI to DVI-D Adapter establishes a fast and convenient connection between a media source equipped with a mini-DVI port and DVI-D dual link display cable. This single cable solution keeps installations and workplaces neat and orderly and requires no external power supplies or complicated configuration making it ideal for presentations, retail displays, trade events, training and more. Gold-plated contacts and full shielding help MANHATTAN Mini-DVI adapters provide clear and stable video transmissions. Durable white PVC jackets and molded boots with strain relief complement Macintosh systems and help ensure connections remain uninterrupted and steady.


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
308496



REV.	DESCRIPTION	ENG.	APPROVAL

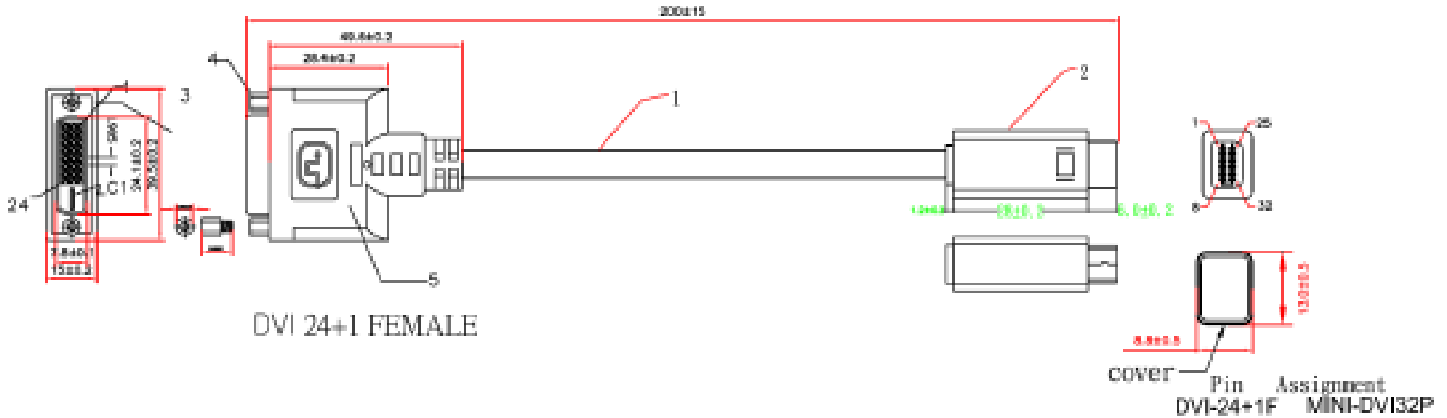

ELECTRICAL PROPERTIES:

- 100% OPEN SHORT MIS-WIRE TEST
- Contact Resistance: 10 ohm
- Insulation Resistance: > 5M ohm
- Hi-POT: 300V AC/10ms

NO	DESCRIPTION	QTY	UNIT
5	PVC SSP/WHITE IN COLOR	1	PCS
4	Ø4DNUT 8.0x4.7	2	PCS
3	DVI24+1 FEMALE SOLDER INSULATION/BLACK IN COLOR	1	PCS
2	MINI-DVI 32P GRAY PASTE CONTACT & F SHELL PLATED-NICKEL ABS SHELL IPOD WHITE	1	PCS
1	UL21276 30#IP+30#IP+30#75C+AB IPOD WHITE IN COLOR OD:5.5	1	PCS

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

MANHATTAN		TITLE	APP'D
		308496	
CUSTOMER		Drawn	
CUSTOMER P/C			
BY P/C			

Features

- Connects a mini-DVI source to DVI-D dual-link display cable
- Delivers a single, high-quality signal to a DVI-D dual-link display – ideal for Mac computers
- Fully shielded to reduce EMI and other interference sources
- Gold-plated connectors provide maximum connectivity
- Molded PVC boot and strain relief
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL
- DVI

CONTACTS

- Mini-DVI-D 32-pin male
- DVI-D 24+1-pin female
- Gold-plated
- Molded PVC boot
- Shielded

CABLE

- 30 AWG connectors
- Mylar and aluminum shielding
- Withstanding voltage: 300 VDC

- Insulation resistance: 5 MOhms
- Conductive resistance: 10 Ohms
- Thermal plastic casing
- Length: 20 cm (7.9 in.)
- Weight: 45.3 g (1.6 oz.)

PACKAGE CONTENTS

- Mini-DVI Male to DVI-D Dual Link Adapter

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.

MANHATTAN
BRINGING COMPUTERS TO LIFE

Copyright © MANHATTAN

