

Composite Video Cable

Triple-Cinch RCA to Triple-Cinch RCA, Blue

High-quality connections that provide superior performance.

MANHATTAN Premium Audio/Visual Cables can connect HD TVs, projectors and flat-panel displays, PC and audio components and more to deliver crisp, clear, error-free transmissions. Precisely engineered and constructed of quality materials, including full foil and braided shielding, gold-plated contacts, nylon mesh jackets and custom-molded boots with strain relief, MANHATTAN Premium Audio/Visual Cables help ensure maximum conductivity, minimal degradation and the highest performance from connected devices.

| Model | Length | Diameter |
|---------------|----------------|----------|
| 317573 | 1.5 m (5 ft.) | 24 AWG |
| 317580 | 3.0 m (10 ft.) | 26 AWG |
| 317597 | 4.8 m (16 ft.) | 26 AWG |
| 361156 | 3.0 m (10 ft.) | 26 AWG |
| 361163 | 1.5 m (5 ft.) | 26 AWG |
| 361170 | 4.8 m (16 ft.) | 26 AWG |
| 361682 | 10 m (33 ft.) | 26 AWG |


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
317573
317580
317597
361156
361163
361170
361682



| REV | DESCRIPTION | ENG | APPROVAL |
|-----|-------------|-----|----------|
| | | | |

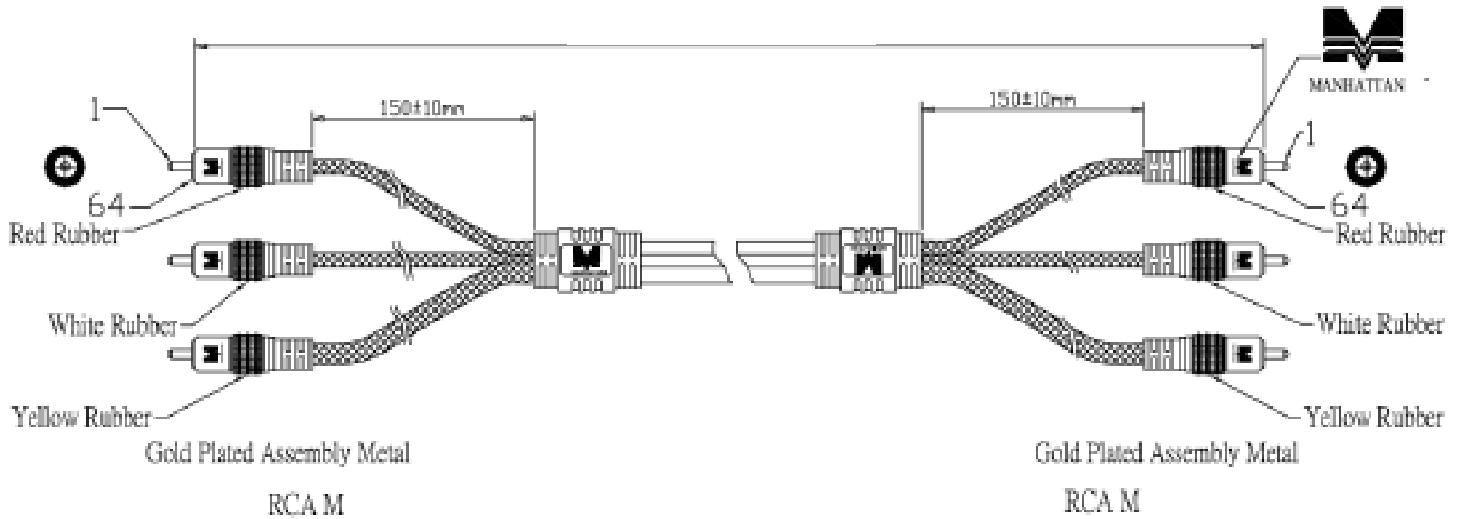

NOTE:

1. CABLE: 26AWG NON-UL,(1C+AL+S)*2F+(1C+AB)*1F,OD=4.0/4.0/5.0mm,PVC JACKET, BLUE CABLE WITH BLACK NYLON NET WITH 2PCS WHITE "X" TYPE
2. LENGTH:1500mm
3. CONNECTOR: RCA MALE*6.
4. MOLD: MOLDING SR
5. CONTACTS:

| | | |
|---------|-----|-------|
| RCA (M) | 1 | 64 |
| RCA (M) | 1 | 64 |
| | LOC | SHELL |
6. OPEN/SHORT TEST: 100% TEST. INSULATION: 1M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCES ARE °

| TOLERANCE (DIN) | TOLERANCE (MM) |
|-----------------|----------------|
| H | +0.02 |
| h | -0.02 |
| ES | +0.05 |
| es | -0.05 |
| EH | +0.005 |
| eh | -0.005 |



| | | | |
|--------------|--------|--------|---------------|
| TITLE: | APPD | | |
| | Check | XIE | |
| CUSTOMER: | Drawer | WJF | DATE 20080211 |
| CUSTOMER PN: | Unit | mm | Projection |
| ICT PIN: | Scale | 1:1 | Size A4 |
| DRAWING: | Sheet | 1 of 1 | REV. A |

Features

- Triple-cinch RCA to triple-cinch RCA
- Heavy-gauge cable with PVC and nylon braided protective jacket
- Corrosion-resistant, gold-plated contacts for best data transmission
- Heavy-duty strain relief
- Lifetime Warranty

Specifications

CONTACTS

- (3) RCA male to (3) RCA male connections
- Gold plated
- Molded PVC boot
- Built-in strain relief

CABLE

- Withstanding voltage: 300 V DC
- Thermal plastic and nylon braid casing
- Foil and braided shielding
- Dimensions: See Length & Diameter, P.1

PACKAGE CONTENTS

- Composite Video Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

