由 Autodesk 教育版产品制作

REV.	DESCRIPTION	ENG.	APPROVAL

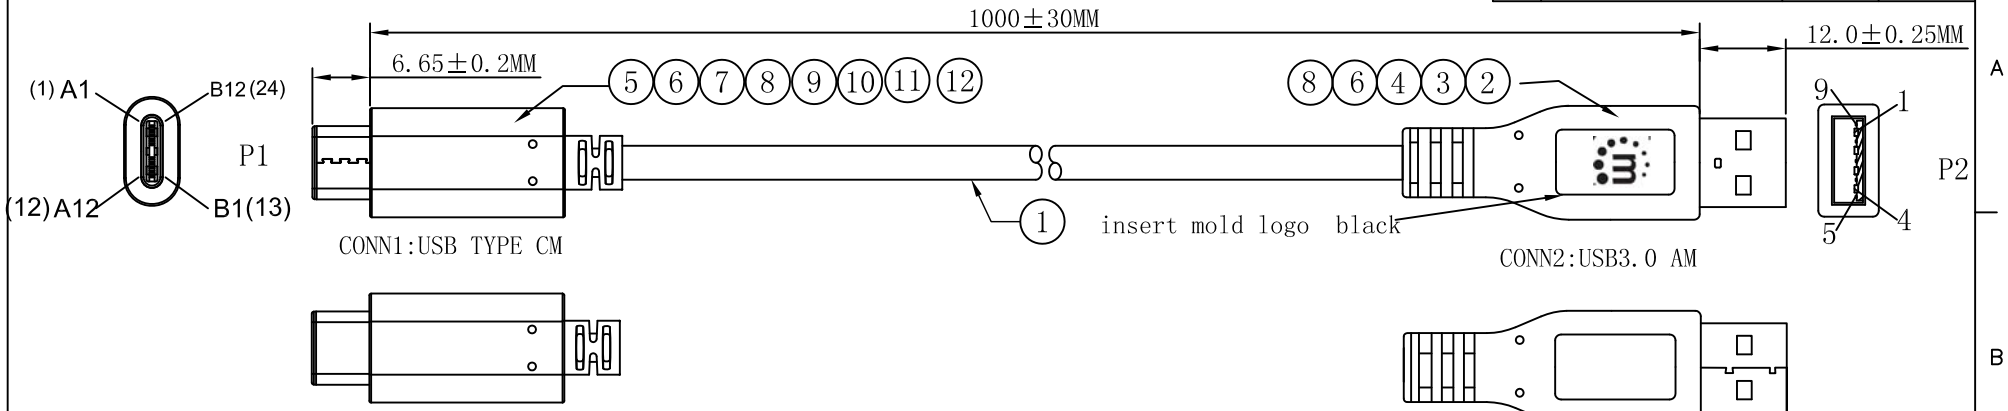



Pin Assignment

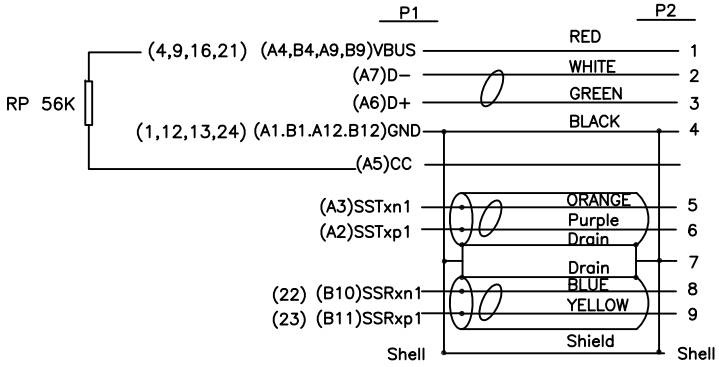

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 100M ohm Min.
4. Hi-Pot: 300VDC/10ms.
5. USB AM :insert mold logo ″ m″

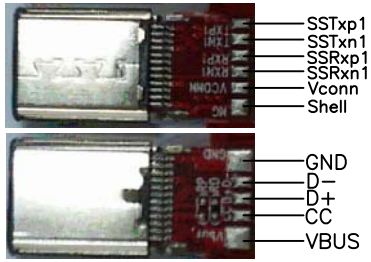

NO.	DESCRIPTION	Q'TY	UNIT
⑫	USB 3.0 AM^A.W^Black wire clip: 30*+30*+24*	1	pcs
⑪	USB 3.0 String cable clip STYPE : NY-66+15%GF, 30+30+24AWG : 9.9*3.5*2.5MM	1	pcs
⑩	USB TYPE C^SOLDER TYPE^ Tin Plating Nickel up ^ (No riveting claw)	1	pcs
⑨	USB TYPE C^SOLDER TYPE^ Tin Plating Nickel Down^ (No riveting claw)	1	pcs
⑧	H.S.T ø2.5 BLACK	0.028	m
⑦	USB 3.1 C Type male Connector Black Insulation Nickel Plated Shell With PCBA(Resistance56KΩ)	1	pcs
⑥	Outside Molding 45P PVC PMS:Black	16	g
⑤	Intside Molding: PE	6	g
④	USB3.0 AM automatic welding SOLDER INSULATION:BLUE SHELL NICKEL PLATED	1	Set
③	USB3.0 AM automatic welding Front Shell Nickel Plated Shell	1	Set
②	USB3.0 AM automatic welding BACK Shell Nickel Plated Shell	1	Set
①	USB3.1^[30AWG(7/0.1TC)+EAM]*2P+[30AWG(7/0.1TC)*1P+A]+24AWG(7/0.2TC)*2C+AEB(36/7/0.12TC 85%TC)OD:4.5MM^Color:Black no mark	1.02	m

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co.,Ltd.

UNLESS OTHERWISE SPECIFIED:DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°

TOLERANCE(INCH)		TOLERANCE(MM)	
x	±0.02"	x	±0.5mm
x.x	±0.01"	x.x	±0.20mm
x.xx	±0.008"	x.xx	±0.15mm
x.xxx	±0.005"	x.xxx	±0.10mm

INTRACOM 安達康股份有限公司 INTRACOM Asia Co.,LTD.

TITLE: MH SB3.1 GEN2 Cbl CM3.0A-AM,BLACK,3ft/1m	APPD		
	Check		
CUSTOMER:	Drawer	limin	Date 15.12.01
CUSTOMER P/N: 353373	Unit	mm	Projection
ICT P/N:	Scale	1:1	Size. A4
DWG.NO:	Sheet	1 of 1	REV. A06

THIS DRAWING MAY BE USED IN WHOLE OR PART

由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作
由 Autodesk 教育版产品制作