
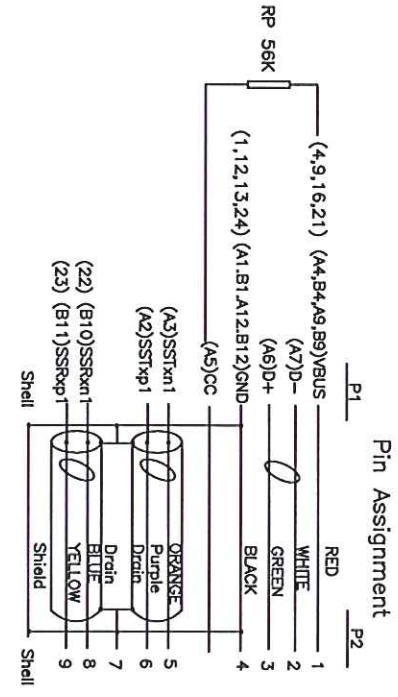
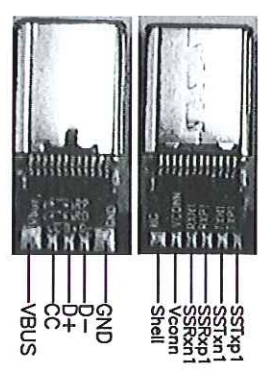


REV.	DESCRIPTION	ENG.	APPROVAL

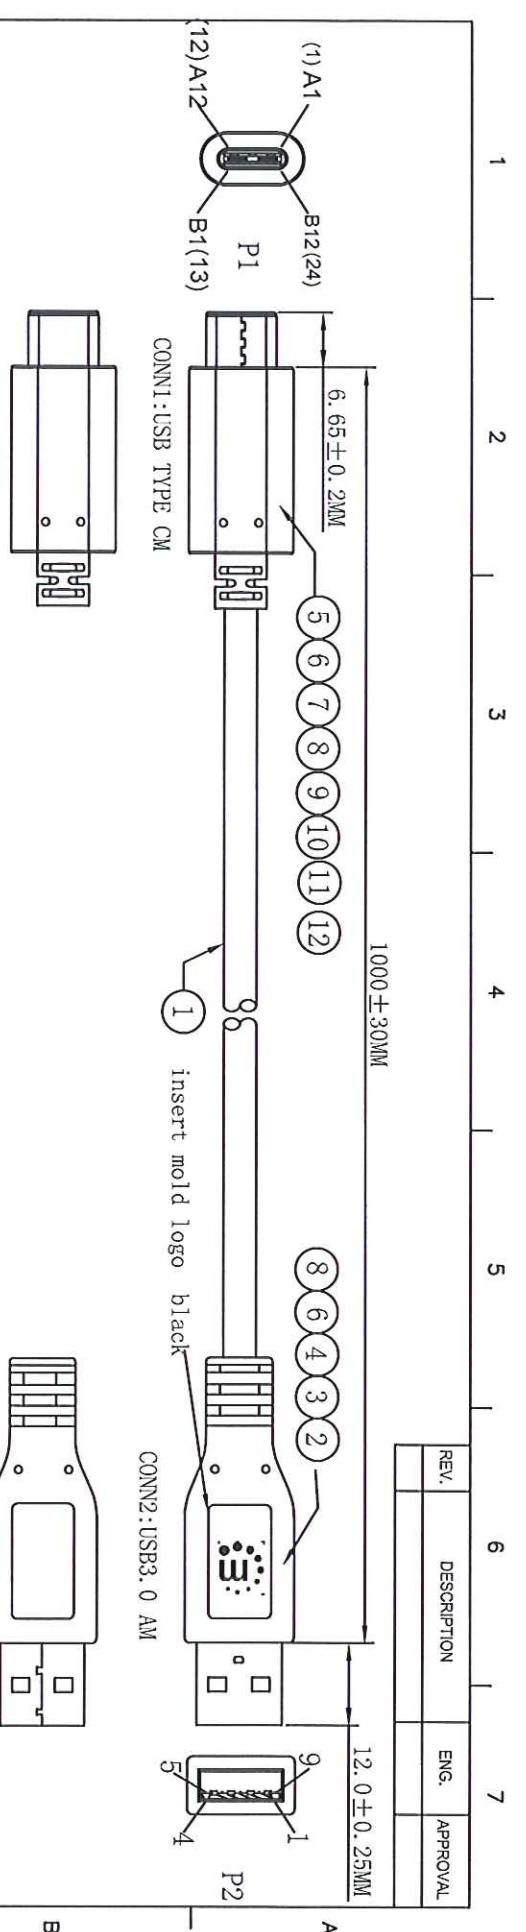

Electrical Test:

1. 100%Test(Open ,short ,miss wire)
2. Contact Resistance: 2 ohm max.
3. Insulation Resistance: 100M ohm Min.
4. Hi-Pot: 300VDC/10ms.
5. USB AM :insert mold logo " m"

OK
Allen Lin
2015.12.3

NO.	DESCRIPTION	QTY	UNIT
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co.,Ltd.

UNLESS OTHERWISE SPECIFIED-DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE=±1°

TOLERANCE(INCH)	TOLERANCE(MM)
±0.02"	±0.5mm
±0.01"	±0.20mm
±0.008"	±0.15mm
±0.005"	±0.10mm

INTRACOM 安達康股份有限公司
INTRACOM Asia Co.,LTD.

TITLE: MH SB3.1 GEN2 Cbl CM3.0A-AM-BLACK,3ft/1m

CUSTOMER: 353373

Customer P/N: 353373

ICT P/N:

DWG.NO:

APPD:

Check:

Drawer:

Unit: mm

Scale: 1:1

Sheet: 1 of 1

Date: 15.12.01

Projection:

Size: A4

REV: A06

THIS DRAWING MAY BE USED IN WHOLE OR PART