


REV.	DESCRIPTION	ENG.	APPROVAL
B	Add the "M" logo		

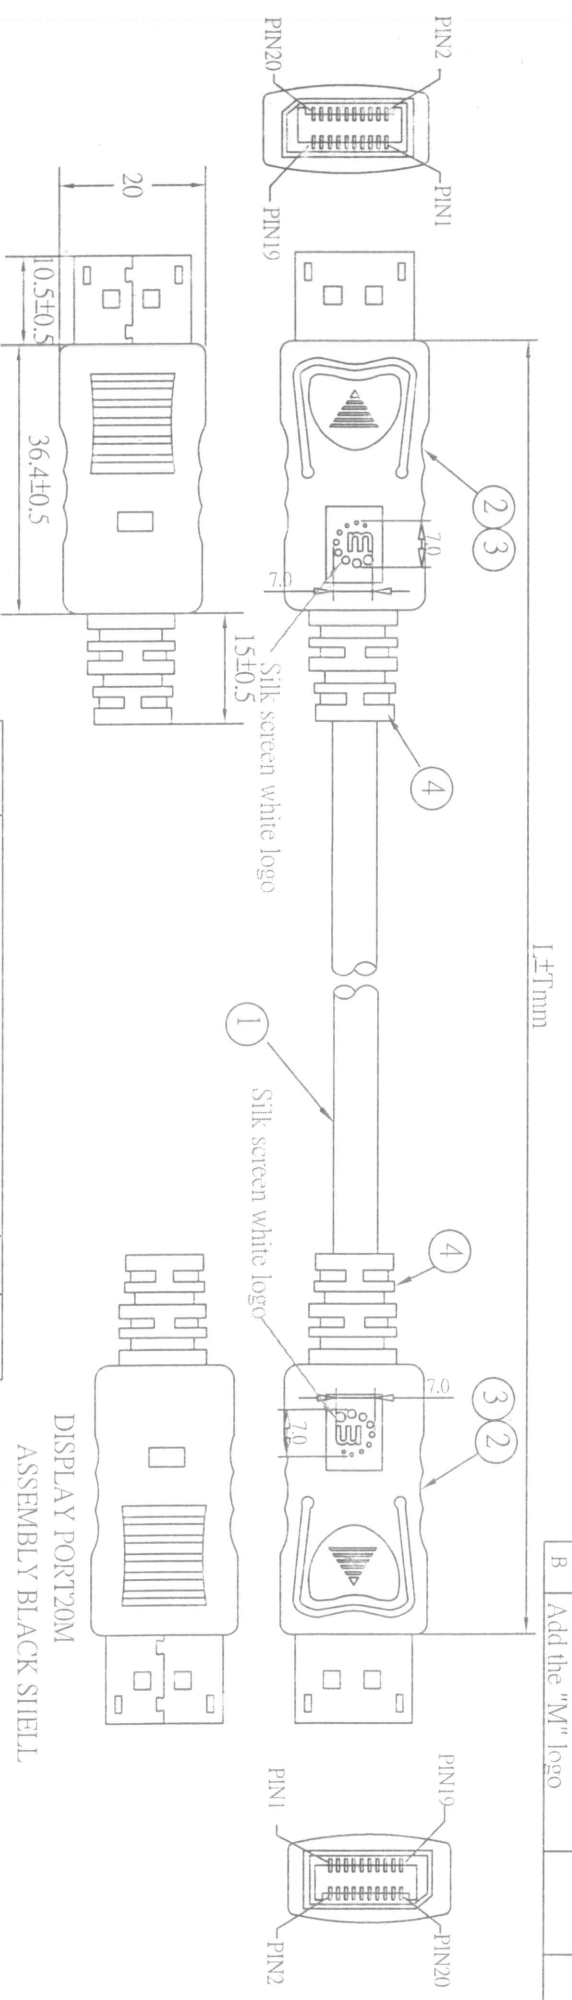

ITEM.	Bar code content	L	T
307093	MH Display Port Ch1 20p M-M Blk 10H/3m	L=3M ±30mm	
307116	MH Display Port Ch1 20p M-M Blk 6.6H/2m	L=2M ±30mm	
393799	MHPB Display Port Ch1 20p M-M Blk 6.6H/2m	L=2M ±30mm	
306935	MH Display Port Ch1 20p M-M Blk 3.3H/1m	L=1M ±20mm	

CONTACTS:

DISPLAY PORT20M	1	3	2	4	6	5	7	9	8	10	12	11	13	14	15	17	16	18	19	20	64	
DISPLAY PORT20M		12	10	11	9	7	8	6	4	5	3	1	2	13	14	15	17	16	18	19	20	64
		t.p		GND		t.p		GND		t.p		GND		t.p		GND				BRAID		

OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

4	BLACK PVC	10G
3	BLACK ABS	18G
2	DISPLAY PORT20M (Black Insulator, NICKEL PLATED)	2PCS
1	UL 2027/6 (IP=28+D+AL+MYLAR)*SC+G#28+MYLAR+AL+B OD:6.8mm black	1PCS
No.	Description	Qty

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co., Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co., Ltd.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1°

TOLERANCE (MM)
x ±0.5mm
x.x ±0.20mm
x.xx ±0.15mm
x.xxx ±0.10mm

INTRACOM 安達康股份有限公司
INTRACOM Asia Co., LTD.

TITLE: **INTRACOM**

CUSTOMER: **ALLEN LIN**

CUSTOMER P/N: **2015.7.2**

APPD: **XIE**

Check: **QMQ**

Unit: mm

Scale: 1:1

Projection: **A4**

Sheet: 1 of 1

REV. B

VID: 100480

Date: 2015.06.19

OK.

Allen Lin

2015.7.2