



FireWire Device Cable

9-Pin Male to 4-Pin Male, 1.8m (6 ft.), Black

Model
370479

High-quality connections that provide superior performance.


MANHATTAN® has the latest in IEEE-1394b, or FireWire 800, cable technology. Supporting data transfer speeds up to 800 Mbps, it is twice the speed of original FireWire. These cables are 100 percent compatible with Apple FireWire, Sony iLink and all other IEEE-1394b peripherals. MANHATTAN provides for 9-pin to 6-pin, 9-pin to 4-pin and 9-pin to 9-pin FireWire cables. MANHATTAN cables allow you to connect a 6-pin/4-pin FireWire (1394a) device to a 9-pin FireWire 800 (1394b) port on a computer, or it will connect the 6-pin/4-pin FireWire port on a computer to a 9-pin FireWire 800 device (FireWire 800 devices can achieve FireWire 800 speeds only when connected to a FireWire 800 port).

Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.



REV.	DESCRIPTION	ENG.	APPROVAL

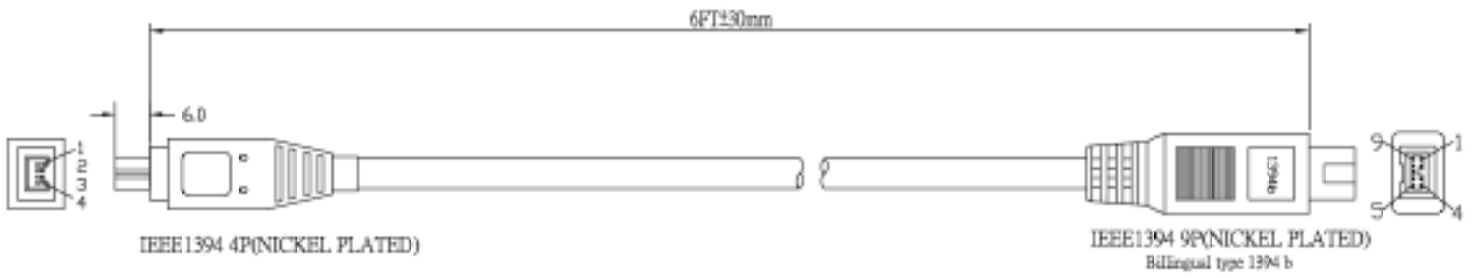

NOTE:

1. CABLE:UL20276,AL+B,30#*2P,BLACK COLOR,OD=5.0mm,PVC JACKET,
2. LENGTH:6FT
3. CONNECTOR:IEEE1394 4P* 1,9P*1PCS (NICKEL PLATED,BLACK INSULATOR)
4. MOLD:IEEE 1394 TYPE. (ASSEMBLY)
5. CONTACTS:

1394 9P	1	2	9	3	4	5
1394 4P	3	4	64	1	2	64
	ORANGE BLUE		OND	GREEN	RED	OND
	PAIRS			PAIRS		
6. OPEN/SHORT TEST: 100% TEST.
INSULATION: MIN. 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°

TOLERANCE (INCH)	TOLERANCE (MM)
∅	+0.02
S.S	+0.01
S.XX	+0.005
S.AXX	+0.002



TITLE:	APPD	
	Check	XIE
CUSTOMER:	Drawn	WJF
		Issue 2009.03.16
CUSTOMER P/N:	Unit	mm
KEY P/N: 370479	Scale	1:1
DRGNO:	Sheet	1 of 1
	REV.	A

Features

- 1394b 9-pin male to 4-pin male
- Connects a FireWire device to a FireWire hub or computer
- Speeds of up to 800 Mbps
- Hi-Speed USB 2.0 for ultra-fast data transfer rates — with zero data degradation
- Lifetime Warranty

Specifications

STANDARDS/CERTIFICATIONS

- UL
- 1394a
- 1394b

CABLE

- Double-shielded
- Length: 1.8 m (6 ft.)

CONNECTORS

- 9-pin male
- 4-pin male
- Nickel plated
- Molded PVC boot
- 30 AWG connectors

PACKAGE CONTENTS

- FireWire Device Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.



Copyright © MANHATTAN

