



# FireWire Device Cable

## 9-Pin Male to 9-Pin Male, 1.8m (6 ft.), Black

**Model**  
370493

**High-quality connections that provide superior performance.**


MANHATTAN® has the latest in IEEE-1394b, or FireWire 800, cable technology. Supporting data transfer speeds up to 800 Mbps, it is twice the speed of original FireWire. These cables are 100 percent compatible with Apple FireWire, Sony iLink and all other IEEE-1394b peripherals. MANHATTAN provides for 9-pin to 6-pin, 9-pin to 4-pin and 9-pin to 9-pin FireWire cables. MANHATTAN cables allow you to connect a 6-pin/4-pin FireWire (1394a) device to a 9-pin FireWire 800 (1394b) port on a computer, or it will connect the 6-pin/4-pin FireWire port on a computer to a 9-pin FireWire 800 device (FireWire 800 devices can achieve FireWire 800 speeds only when connected to a FireWire 800 port).

### Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.



REV	DESCRIPTION	ENG	APPROVAL

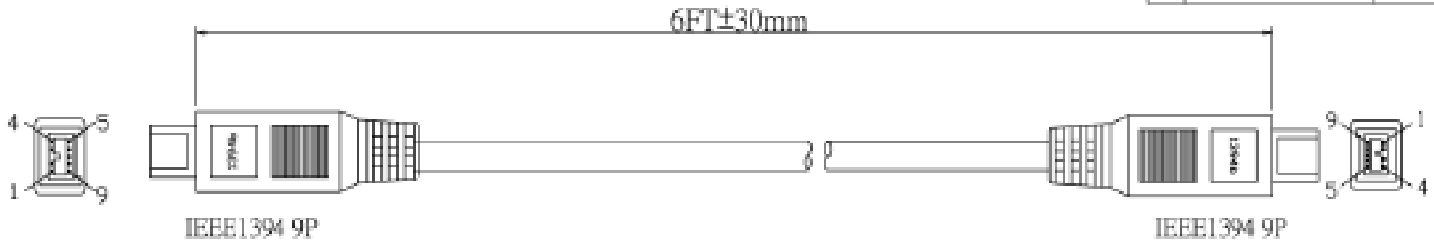

**NOTE:**

1. CABLE:UL20276 AL+B 30#\*2P+26#\*2C,OD=5.5mm,BLACK COLOR PVC JACKET
2. LENGTH:6FT
3. CONNECTOR:IEEE 1394 9P MALE \*2(BLACK INSULATOR)
4. MOLD:IEEE1394 9P MOLDING
5. CONTACTS:

IEEE1394 9P	1	2	9	3	4	5	6	8	64
IEEE1394 9P	3	4	5	1	2	9	6	8	64
	GREEN RED			ORANGE BLUE			BLACK		WHITE
	#30		SHIELD	#30		SHIELD			
	PINS			PINS					

6. OPEN/SHORT TEST: 100% TEST.

INSULATION: MIN. 2M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (ANGULAR TOLERANCE=±1°)

TOLERANCE (INCH)	TOLERANCE (MM)
0	±0.25mm
0.005	±0.125mm
0.010	±0.25mm
0.005	±0.125mm



TITLE:	ALWD			
Check:		XIE		
Customer:	ZXW		Note 20060417	
CUSTOMER P.O.:		Unit	mm	Projection
ST P/N: 370493		Scale:	1:1	Size: A4
DWG. NO.:		Sheet	1 of 1	REV: A

## Features

- 1394b 9-pin male to 9-pin male
- Connects a FireWire device to a FireWire hub or computer
- Speeds of up to 800 Mbps
- Hi-Speed USB 2.0 for ultra-fast data transfer rates — with zero data degradation
- Lifetime Warranty

## Specifications

### STANDARDS/CERTIFICATIONS

- UL
- 1394a
- 1394b

### CABLE

- Double-shielded
- Length: 1.8 m (6 ft.)

### CONNECTORS

- 9-pin male
- 4-pin male
- Nickel plated
- Molded PVC boot
- 30 AWG connectors

### PACKAGE CONTENTS

- FireWire Device Cable

For more information on MANHATTAN products, consult your local dealer or visit [www.manhattan-products.com](http://www.manhattan-products.com).



Copyright © MANHATTAN

