


1, Patchcord Length (m)

Length L	Tolerance T	Part No	Packing Bag Size
L = 2.0m	±0.10m	750004	180x280mm
L = 5.0m	±0.10m	516792	180x280mm
L = 10.0m	±0.10m	516815	180x280mm
L = 20.0m	±0.20m	750967	250x300mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.3dB
Return Loss	≥50.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

Cable Profile View

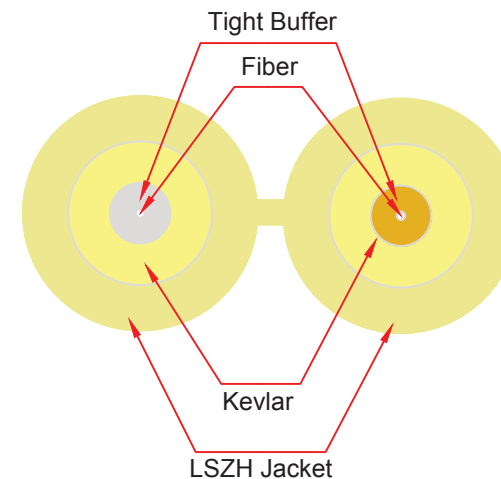

ITEM	DESCRIPTION	Q'TY
1	LC Dust Cap (White)	4
2	LC/UPC Connector SM Duplex Ø3.0mm (Blue)	2
3	LC Duplex Clip (Bule)	2
4	LC 3.0 Boot (White)	4
5	SM 9/125 OS2 Duplex 3.0mm Cable(Yellow)	Xm

INTELLINET[®] intellinetnetwork.com
NETWORK SOLUTIONS

DRAWN BY	LW	SPEC.	LC/UPC-LC/UPC SM-Duplex 9/125 OS2 3.0mm Patchcord L=Xm, Yellow LSZH Jacket			A
CHECK BY	ZH	CUSTOMER	SHEET	1/P	SCALE	NONE UNIT: mm
APPD. BY	ZH	DWG. NO.	DATE	2015-04-07	VIEW	