


1, Patchcord Length (m)

Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	±0.10m	750868	180x280mm
L = 2.0m	±0.10m	750134	180x280mm
L = 3.0m	±0.10m	750066	180x280mm
L = 5.0m	±0.10m	750080	180x280mm
L = 10.0m	±0.10m	750097	180x280mm
L = 20.0m	±0.20m	750905	250x300mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.30dB
Return Loss	≥35.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

Cable Profile View

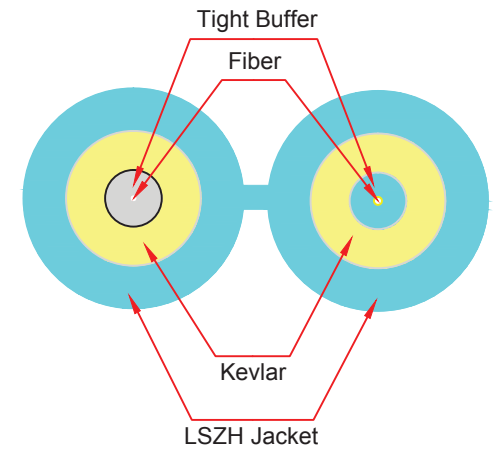

ITEM	DESCRIPTION	Q'TY
1	LC Dust Cap (White)	4
2	LC/UPC Connector MM Duplex Ø3.0mm (Beige)	2
3	LC Duplex Clip (Beige)	2
4	LC 3.0 Boot (Beige)	4
5	MM 50/125um OM3 Duplex 3.0mm Cable (Aqua)	Xm

INTELLINET[®] intellinetnetwork.com
NETWORK SOLUTIONS

DRAWN BY	LW	SPEC.	LC/UPC-LC/UPC MM 50/125 OM3 Duplex 3.0mm Patchcord L=Xm LSZH Aqua Jacket	A	
CHECK BY	ZH	CUSTOMER		SHEET	1/P
APPD. BY	ZH	DWG. NO.		SCALE	NONE
				DATE	2015-04-07
				VIEW	