


1, Patchcord Length (m)

Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	±0.10m	473965	180x280mm
L = 2.0m	±0.10m	473972	180x280mm
L = 3.0m	±0.10m	472050	180x280mm
L = 5.0m	±0.10m	473729	180x280mm
L = 20.0m	±0.20m	750974	250x300mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.30dB
Return Loss	≥50.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

Cable Profile View

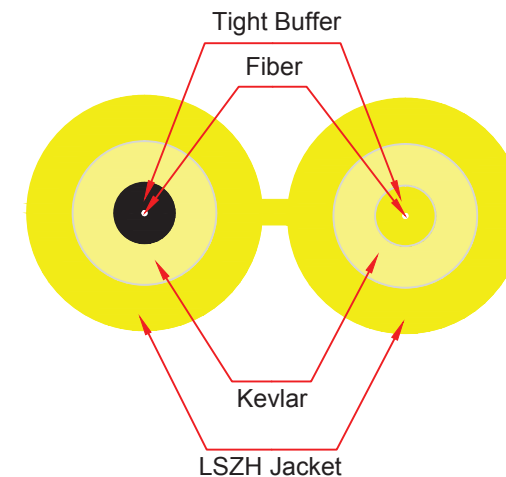

ITEM	DESCRIPTION	Q'TY
1	SC Dust Cap (Clear)	2
2	SC/UPC Connector SM Duplex 3.0mm (Blue)	1
3	SC Duplex Clip (Blue)	1
4	SC 3.0 Boot (Blue)	1
5	SC 3.0 Boot (Yellow)	1
6	SM Duplex 9/125 OS2 3.0 LSZH Cable(Yellow)	Xm
7	LC Dust Cap (White)	2
8	LC/UPC Connector SM Duplex Ø3.0mm (Blue)	1
9	LC Duplex Clip (Blue)	1
10	LC 3.0 Boot (White)	2



intellinetnetwork.com

DRAWN BY	LW	SPEC.	LC/UPC-SC/UPC SM 9/125 OS2 Duplex 3.0mm Patchcord L=Xm LSZH Yellow Jacket			A
CHECK BY	ZH	CUSTOMER	SHEET	/P	SCALE	NONE UNIT: mm
APPD. BY	ZH	DWG. NO.	DATE	2015-04-07	VIEW	