

1, Patchcord Length (m)


Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	±0.10m	470605	180x280mm
L = 2.0m	±0.10m	470612	180x280mm
L = 3.0m	±0.10m	470629	180x280mm
L = 5.0m	±0.10m	470636	180x280mm
L = 10.0m	±0.10m	470643	180x280mm
L = 20.0m	±0.20m	750950	250x300mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.3dB
Return Loss	≥50.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

ITEM	DESCRIPTION	Q'TY
1	SC Dust Cap (Clear)	4
2	SC/UPC Connector SM Duplex Ø3.0mm (Blue)	2
3	SC Duplex Clip (Blue)	2
4	SC 3.0 Boot (Blue)	2
5	SC 3.0 Boot (Yellow)	2
6	SM Duplex 3.0mm 9/125 LSZH Cable (Yellow)	Xm

Cable Profile View

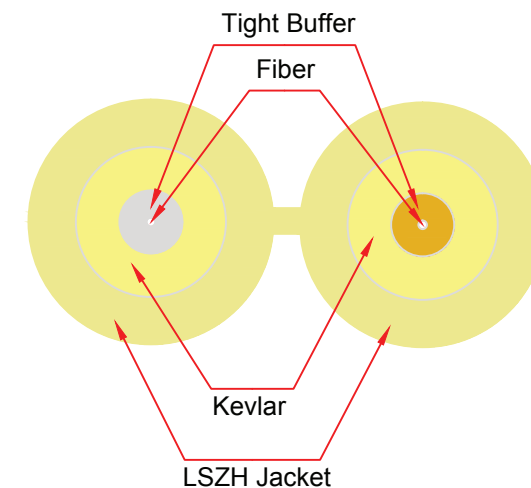

INTELLINET[®] intellinetnetwork.com
NETWORK SOLUTIONS

DRAWN BY	LW	SPEC.	SC/UPC-SC/UPC SM-Duplex 9/125 3.0mm Patchcord L=Xm, LSZH Yellow Jacket			A
CHECK BY	ZH	CUSTOMER		SHEET /P	SCALE NONE	UNIT: mm
APPD. BY	ZH	DWG. NO.		DATE 2015-04-07	VIEW	