


1, Patchcord Length (m)

Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	±0.10m	474016	180x280mm
L = 2.0m	±0.10m	750011	180x280mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.30dB
Return Loss	≥50.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

Cable Profile View

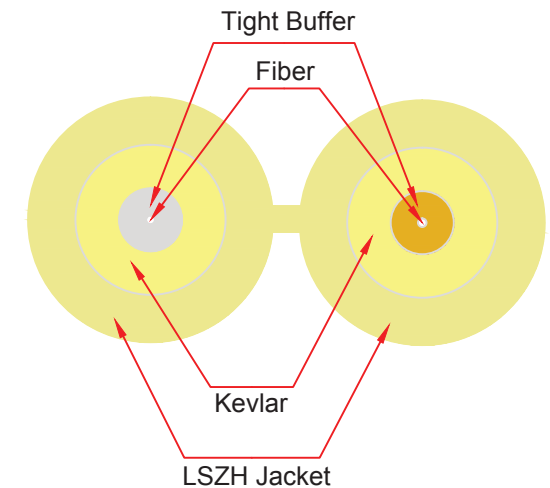

ITEM	DESCRIPTION	Q'TY
1	ST Dust Cap (Clear)	2
2	ST/UPC Duplex Connector SM Ø3.0mm (Blue)	1
3	ST 3.0 Boot (Yellow)	1
4	ST 3.0 Boot (White)	1
5	SM Duplex 3.0mm 9/125 OS2 LSZH Cable (Yellow)	Xm
6	LC 3.0 Boot (White)	2
7	LC Duplex Clip (Blue)	1
8	LC/UPC Duplex Connector SM Ø3.0mm (Blue)	1
9	LC Dust Cap (White)	2



intellinetnetwork.com

DRAWN BY	LW	SPEC.	LC/UPC-ST/UPC 9/125 OS2 SM-Duplex 3.0mm Patchcord L=Xm LSZH Yellow Jacket			A
CHECK BY	ZH	CUSTOMER	SHEET	/P	SCALE	NONE UNIT: mm
APPD. BY	ZH	DWG. NO.	DATE	2015-04-07	VIEW	