

1, Patchcord Length (m)


Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	±0.10m	470360	180x280mm
L = 2.0m	±0.10m	470414	180x280mm
L = 3.0m	±0.10m	470421	180x280mm
L = 20.0m	±0.20m	472692	250x300mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.30dB
Return Loss	≥35.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

ITEM	DESCRIPTION	Q'TY
1	LC Dust Cap (White)	4
2	LC/UPC MM Duplex Connector Ø 3.0mm (Beige)	2
3	LC Duplex Clip (Beige)	2
4	LC Boot (Beige)	2
5	MM 50/125 OM2 Duplex LSZH 3.0mm Cable (Orange)	Xm
6	ST 3.0mm Boot (Red)	2
7	ST 3.0mm Boot (Black)	2
8	ST/UPC Duplex metal Connector MM Ø3.0mm	2
9	ST Dust Cap (Clear)	2

Cable Profile View

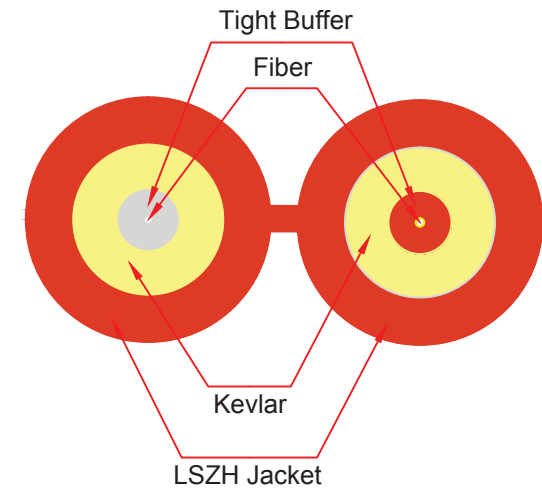

**INTELLINET**<sup>®</sup> [intellinetnetwork.com](http://intellinetnetwork.com)  
NETWORK SOLUTIONS

DRAWN BY	LW	SPEC.	LC/UPC-ST/UPC MM-Duplex 3.0mm 50/125 OM2 Patchcord L=Xm, LSZH Orange Jacket	A	
CHECK BY	ZH	CUSTOMER		SHEET /P	SCALE NONE UNIT: mm
APPD. BY	ZH	DWG. NO.		DATE 2015-04-07	VIEW