


Cable Profile View

1, Patchcord Length (m)

Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	±0.10m	471305	180x280mm
L = 2.0m	±0.10m	471312	180x280mm
L = 20.0m	±0.20m	472975	250x300mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.30dB
Return Loss	≥35.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

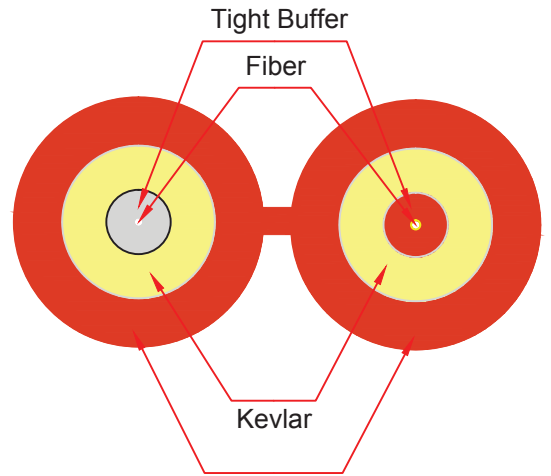

ITEM	DESCRIPTION	Q'TY
1	LC Dust Cap (White)	4
2	LC/UPC Connector MM Duplex Ø3.0mm (Beige)	2
3	LC Duplex Clip (Beige)	2
4	LC 3.0 Boot (Beige)	4
5	MM 62.5/125um OM1 Duplex 3.0mm Cable (Orange)	Xm
6	ST 3.0mm Boot (Red)	1
7	ST 3.0mm Boot (Black)	1
8	ST/UPC Duplex metal Connector MM Ø3.0mm	1
9	ST Dust Cap (Clear)	2

INTELLINET® NETWORK SOLUTIONS intellinetnetwork.com

DRAWN BY	LW	SPEC.	LC/UPC-LC/UPC MM 62.5/125 OM1 Duplex 3.0mm Patchcord L=Xm LSZH Orange Jacket				A
CHECK BY	ZH	CUSTOMER	SHEET	1/P	SCALE	NONE	UNIT: mm
APPD. BY	ZH	DWG. NO.	DATE	2015-04-07	VIEW		