


Cable Profile View

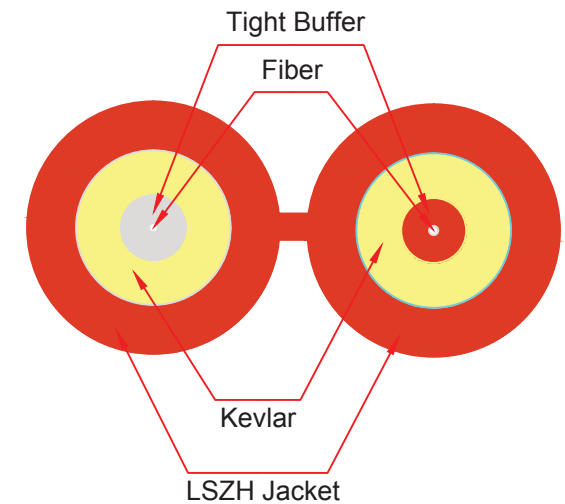

1, Patchcord Length(m)

Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	±0.10m	470056	180x280mm
L = 2.0m	±0.10m	470063	180x280mm
L = 3.0m	±0.10m	470070	180x280mm
L = 5.0m	±0.10m	470087	180x280mm
L = 10.0m	±0.10m	470094	180x280mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤0.30dB
Return Loss	≥35.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

ITEM	DESCRIPTION	Q'TY
1	ST Dust Cap (Clear)	4
2	ST/UPC Duplex metal Connector MM Ø3.0mm	2
3	ST 3.0mm Boot (Red)	2
4	ST 3.0mm Boot (Black)	2
5	MM 50/125 Duplex 3.0mm LSZH Cable (Orange)	Xm

**INTELLINET**® [intellinetnetwork.com](http://intellinetnetwork.com)  
NETWORK SOLUTIONS

DRAWN BY	LW	Description	ST/UPC-ST/UPC MM Duplex 50/125 3.0mm Patchcord L=Xm LSZH Orange Jacket				<b>A</b>
CHECK BY	ZH	CUSTOMER	SHEET	/P	SCALE	NA	UNIT: mm
APPD. BY	ZH	DWG. NO.	DATE	2015-04-07	VIEW		