


Cable Profile View

1, Patchcord Length (m)

Length L	Tolerance T	Part No	Packing Bag Size
L = 1.0m	± 0.10m	471251	180x280mm
L = 2.0m	± 0.10m	471268	180x280mm
L = 3.0m	± 0.10m	471275	180x280mm
L = 5.0m	± 0.10m	471282	180x280mm
L = 10.0m	± 0.10m	471299	180x280mm
L = 20.0m	± 0.20m	473033	250x300mm

2, Connector Test Specifications

Parameters	Specifications
Insertion Loss	≤ 0.30dB
Return Loss	≥ 35.0dB
Durability(1000Mating)	0.2dB Max.Increase
Operating Temperature	-40℃~75℃
Storage Temperature	-40℃~85℃

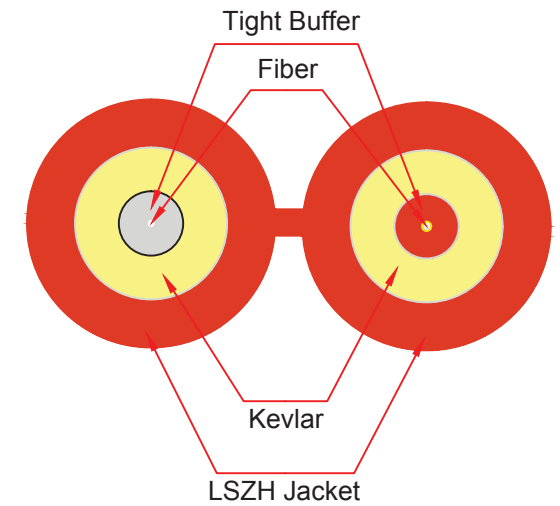

ITEM	DESCRIPTION	Q'TY
1	SC Dust Cap (Clear)	2
2	SC/UPC Connector MM Duplex 3.0mm (Beige)	1
3	SC Duplex Clip (Beige)	1
4	SC 3.0 Boot (Red)	1
5	SC 3.0 Boot (Black)	1
6	MM Duplex 62.5/125 OM1 3.0 LSZH Cable(Orange)	Xm
7	LC Dust Cap (White)	2
8	LC/UPC Connector MM Duplex Ø3.0mm (Beige)	1
9	LC Duplex Clip (Beige)	1
10	LC 3.0 Boot (Beige)	2



intellinetnetwork.com

DRAWN BY	LW	SPEC.	LC/UPC-SC/UPC MM 62.5/125 OM1 Duplex 3.0mm Patchcord L=Xm LSZH Orange Jacket				A
CHECK BY	ZH	CUSTOMER	SHEET	/P	SCALE	NONE	UNIT: mm
APPD. BY	ZH	DWG. NO.	DATE	2015-04-07	VIEW		