

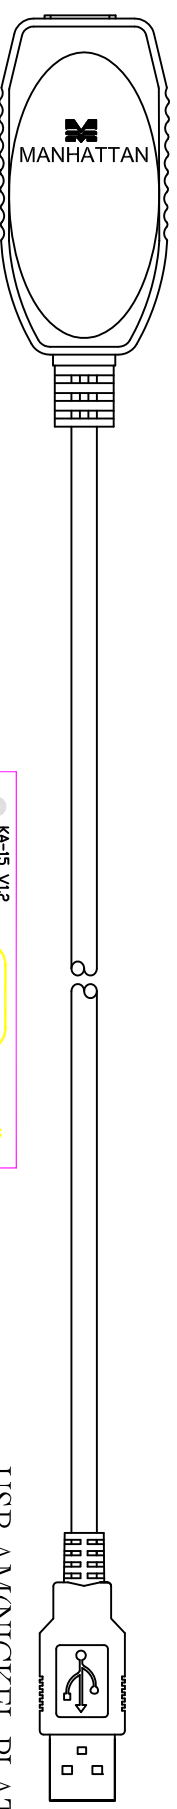


REV.	DESCRIPTION	ENG.	APPROVAL

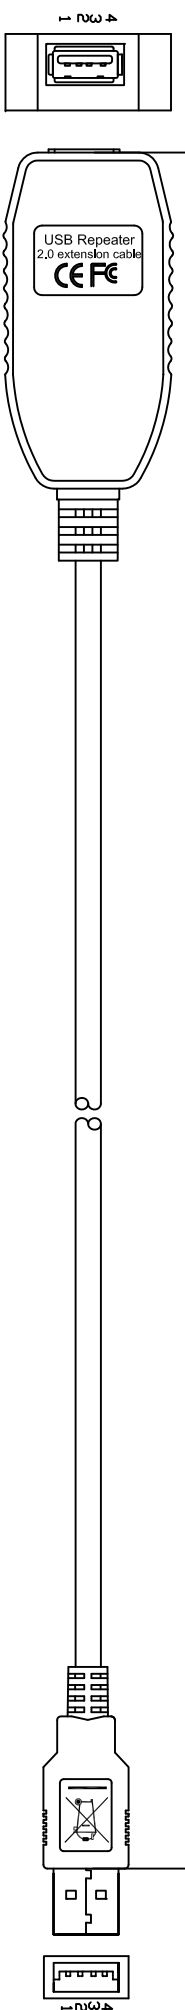

USB AF(NICKEL PLATED)
ASSEMBLY TRANSPARENT BLACK SHELL

USB AM(NICKEL PLATED)
TRANSPARENT BLACK MOLDING

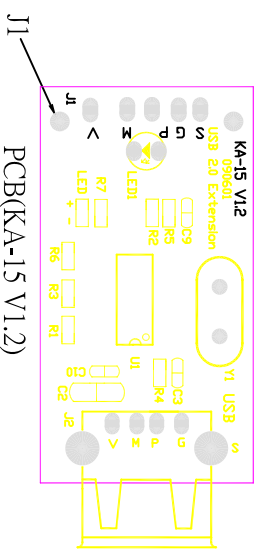

- NOTE:
1. CABLE: UL22725,2.0VER,AL+B,28#*1P+22#*2C,OD=5.0mm,TRANSPARENT COLOR,PVC JACKET.(CCA)
 2. LENGTH:5000mm
 3. CONNECTOR:USB AM*1PCS,USB AF*1PCS.(WHITE INSULATOR,NICKEL PLATED)
 4. MOLD:TRANSPARENT BLACK MOLDING.
 5. CONTACTS:

PCB(Q1)	V	M	P	G	S
USBAM	1	2	3	4	64
RED	WHITE #28	GREEN #28	BLACK	BRAND	
	PAIR				

- WHITE/GREEN PAIR...28AWG ,RED/BLACK...22AWG
6. OPEN/SHORT TEST: 100% TEST.
 - INSULATION: 5M.
 7. RoHS Compliant

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co.,Ltd.	
UNLESS OTHERWISE SPECIFIED,DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°	
TOLERANCE (INCH)	TOLERANCE (MM)
X ±0.02"	±0.5mm
X.X ±0.01"	±0.20mm
X.XX ±0.008"	±0.15mm
X.XXX ±0.005"	±0.10mm

TITLE:	APPD	Check	XIE
CUSTOMER:	Drawer	WJF	Date 2009.05.19
CUSTOMER P/N:	Unit	mm	Projection
ICT P/N: 519779	Scale	1:1	Size: A4
DWG.NO:	Sheet	1 of	REV. A