



REV.	DESCRIPTION	ENG.	APPROVAL

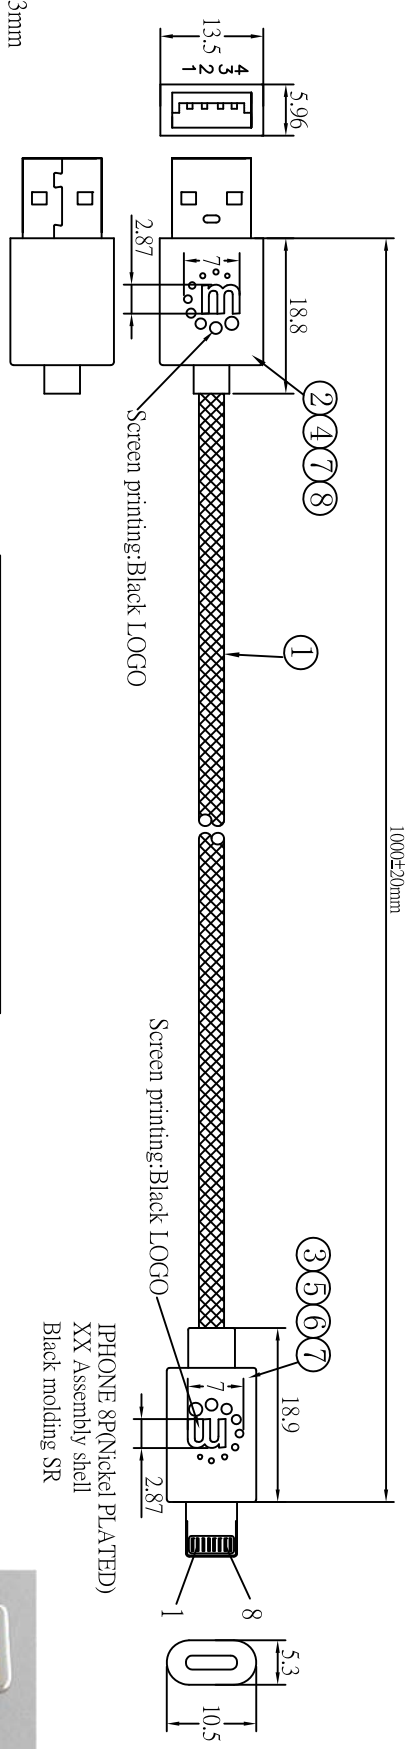

ITEM NO.	Assembly Connector Color
394321	Gold
394338	Silver
394345	Gray

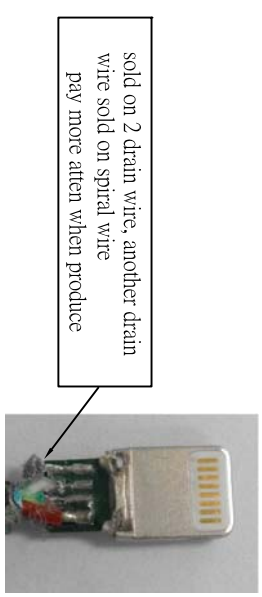

USB AM PCB	1	2	3	4 + 64
V	D-	D+	G	

RED WHITE GREENSHELL.

PIN4 sold on 2 drain wire, another drain wire sold on spiral wire pay more atten when produce

CONTACTS:

OPEN/SHORT TEST: 100% TEST.
INSULATION: 5M.

⑧	Copper foil	1PCS
⑦	Black PVC	10g
⑥	Shield	1PCS
⑤	C48 XX Assembly shell	1PCS
④	USB AM XX Assembly shell	1PCS
③	C48 (Nickel plated)	1PCS
②	USB AM(White Insulator,Nickel plated)Short type(Kanglihong)	1PCS
①	32#(90.05*2#C+2#(46.008*1.250D)*C+F+3D+AL+SP Black PVC Racket+transparent nylon net(PEET) OD=3.0mm Contain nylon net	1PCS

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co., Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co., Ltd.

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1°

TOLERANCE (INCH)	TOLERANCE (MM)
X	±0.5mm
X.X	±0.20mm
X.XX	±0.15mm
X.XXX	±0.10mm

		安達康股份有限公司 INTRACOM Asia Co., LTD.	
TITLE:	APPD	VID	100480
CUSTOMER:	Check	XIE	
CUSTOMER P/N:	Drawer	ZML	Date 2015.9.2
ICT P/N: 3943XX	Unit	mm	Projection
DWG. NO:	Scale	1:1	Size A4
	Sheet	1 of	REV. A