



HDMI Splitter Cable

HDMI Male to HDMI Female / HDMI Female, 0.3 m (1 ft.), Black

Easily distributes a single signal between two displays.

The MANHATTAN® Video Splitter Cable establishes a fast and convenient connection to simultaneously transmit a signal between a desktop or notebook computer and two displays. Unlike common Y-cable configurations found on other video splitter cables, the MANHATTAN Video Splitter Cable features an integrated 2-in-1 output design in a durable overmold that eliminates unnecessary tangles and clutter to help keep installations and workspaces neat and orderly. A single-cable solution requiring no external power supplies or complicated configuration, it's ideal for presentations, retail displays, trade events, training and other applications. Nickel-plated contacts and full shielding help MANHATTAN Video Splitter Cables provide clear and stable video transmissions. Convenient thumbscrews, flexible jacket and molded PVC boots with strain relief help ensure connections remain uninterrupted and steady.


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
393065



REV.	DESCRIPTION	ENG.	APPROVAL

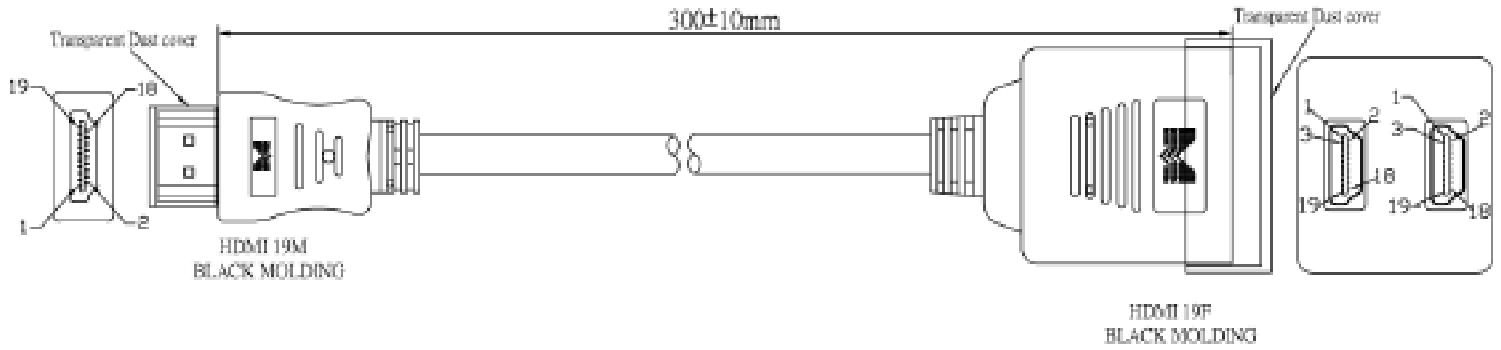

- NOTE:**
- CABLE:UL20276,(30#*1P+D+AL+MY)*4PCS+30#*1P+30#*5C)+AL+B,OD=5.5mm,BLACK COLOR,PVC JACKET.(AM BRAID,High Speed HDMI Cable)
CABLE PRINT:MANHATTAN(www.manhattan-products.com)
 - LENGTH:300mm
 - CONNECTOR:HDMI 19M*1PCS,HDMI 19F*2PCS.(GOLD PLATED,BLACK INSULATOR)
 - MOLD: BLACK MOLDING
 - CONTACTS:

HDMI19F	3	1	2	6	4	5	9	7	8	12	10	11	13	14	15	16	17	18	19	64
HDMI19F	3	1	2	6	4	5	9	7	8	12	10	11	13	14	15	16	17	18	19	64
HDMI19M	3	1	2	6	4	5	9	7	8	12	10	11	13	14	15	16	17	18	19	64
	TP SHIELD			TP SHIELD			TP SHIELD			TP SHIELD			TP			BRAID				

- OPEN/SHORT TEST:100% TEST.
INSULATION: MIN. 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

TOLERANCE (INCH)	TOLERANCE (MM)
x .001"	x .025mm
x .002"	x .050mm
x .005"	x .127mm
x .010"	x .254mm

MANHATTAN

TITLE:	APPD:			
	Check:	XIE		
CUSTOMER:	Drawn:	WJF	Date:	2013.1.25
CUSTOMER P/N:	Unit:	mm	Projection:	1st
REV. P/N:	Scale:	1:1	Size:	A4
DWG. NO.:	Sheet:	1 of	REV.:	A

Features

- HDMI 19-pin male to (2) HDMI 19-pin female connections
- Connects an HDMI male source with two HDMI female displays
- Delivers a single, high-quality signal to two displays – ideal for presentations, retail displays and training applications
- Integrated 2-in-1 output design eliminates Y-cable tangles and clutter
- Fully shielded to reduce EMI interference for improved video transmission
- Molded PVC boot and strain relief
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 20276
- ISO 9002
- RU
- Meets or exceeds existing HDMI 1.2 standards

CONNECTORS

- (1) HDMI 19-pin male
- (2) HDMI 19-pin female
- Nickel plated conductors
- Molded PVC boot

CABLE

- 30 AWG connectors
- Shielding: aluminum and braided
- Current rating: 0.5 A DC
- Withstanding voltage: 300 V DC
- Insulation resistance: 50 MOhms
- Conductive resistance: 2 Ohms
- Thermal plastic casing

PACKAGE CONTENTS

- HDMI Splitter Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.

MANHATTAN
BRINGING COMPUTERS TO LIFE

Copyright © MANHATTAN

