



SVGA with Audio Cable

HD15 and Stereo 3.5 mm Plug, Male to Male, Black

Transmit sound and high-resolution video in a single-cable solution.

MANHATTAN® provides a single-cable solution for connecting a desktop or notebook computer to a video display system with built-in speakers. From classrooms to conference rooms, it's the ideal solution for use with projectors, flat-panel displays, switches and other video devices with a stereo input. The single-cable configuration prevents tangles and clutter while limiting connectivity errors. The heavy foil and braided shielding with thermal casing helps ensure that audio and video signals are properly transmitted with less distortion for the best possible quality.

Model	Length	Model	Length
324311	4.5 m (15 ft.)	326674	15 m (50 ft.)
324342	7.5 m (25 ft.)	326681	20 m (66 ft.)
324359	10 m (33 ft.)		


Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all MANHATTAN products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

Model
324311
324342
324359
326674
326681



REV.	DESCRIPTION	ENG.	APPROVAL

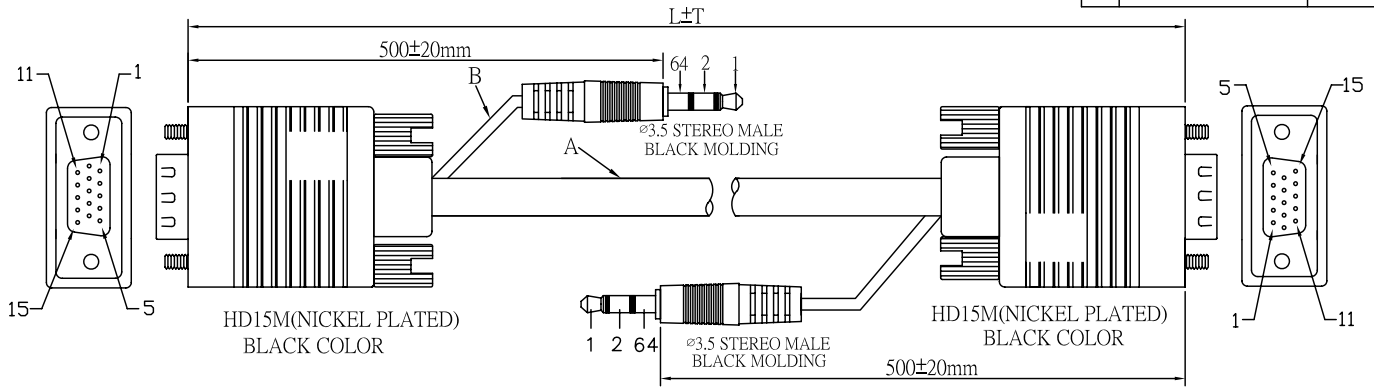

NOTE:

- CABLE: (A)UL2919,AL+B,30#*3COAX+30#*11C,OD=8.5mm,BLACK PLANE,PVC JACKET.(AM BRAID)
(B)28#,UL2547,2C+S,OD=2.8mm,BLACK COLOR,PVC JACKET.
- LENGTH: L/500mm
- CONNECTOR: HDB15M*2 (BLACK INASULATOR,FULL PIN) ,Ø3.5 STEREO MALE*2PCS.(NICKEL PLATED)
- SCREW:R37.7 SCREW*4PCS.
- CONTACTS:

HD15M	1	2	3	6	7	8	4	5	9	10	11	12	13	14	15	64
HD15M	1	2	3	6	7	8	4	5	9	10	11	12	13	14	15	64
	RED	GRN	BLU	RED	GRN	BLU										BRAID
	COAX			GND												

Ø3.5	1	2	64
Ø3.5	1	2	64

- OPEN/SHORT TEST: 100% TEST.
INSULATIONS: 5M.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MANHATTAN AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF MANHATTAN.

UNLESS OTHERWISE SPECIFIED-DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°

TOLERANCE (INCH)	TOLERANCE (MM)
x	±0.02"
x.x	±0.01"
x.xx	±0.008"
x.xxx	±0.005"
x	±0.5mm
x.x	±0.20mm
x.xx	±0.15mm
x.xxx	±0.10mm

MANHATTAN

TITLE:	APPD			
Check		XIE		
CUSTOMER:	Drawer	WJF	Date	2009.10.29
CUSTOMER P/N:	Unit	mm	Projection	⊕
ICT P/N:	Scale	1:1	Size	A4
DWG.NO:	Sheet	1 of	REV.	A

Features

- Ideal single-cable solution for connecting a desktop or notebook computer to a monitor with built-in speakers
- HD15 male to HD15 male with built-in 3.5 mm stereo male to male
- Heavy-gauge cable with PVC protective jacket
- Fully shielded to reduce EMI interference for improved video transmission
- Molded PVC boot with strain relief
- Lifetime Warranty

Specifications

STANDARDS AND CERTIFICATIONS

- UL 2919
- UL 2547

CONNECTORS

- (2) 3.5 mm stereo male connections
- (2) HD 15-pin male connections
- Nickel plated
- Molded PVC boot
- Built-in strain relief
- Mini-coax (RGB) and paired video wire
- 40.6 cm (16 in.) cable between video and audio connections

CABLE

- 30 AWG conductors (video)
- 38 AWG conductors (audio)
- Withstanding voltage: 300 V DC
- Thermal plastic casing
- Shielding: foil and braided

PACKAGE CONTENTS

- High Speed HDMI Cable

For more information on MANHATTAN products, consult your local dealer or visit www.manhattan-products.com.

MANHATTAN
BRINGING COMPUTERS TO LIFE

Copyright © MANHATTAN

