




INTELLINET®


NETWORK SOLUTIONS

1 2 3 4 5 6 7


REV.	DESCRIPTION	ENG.	APPROVAL

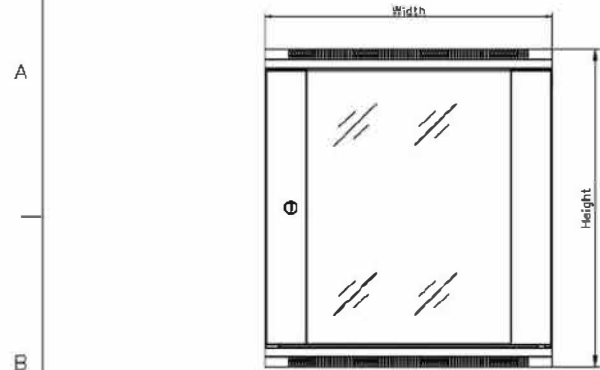


FRONT

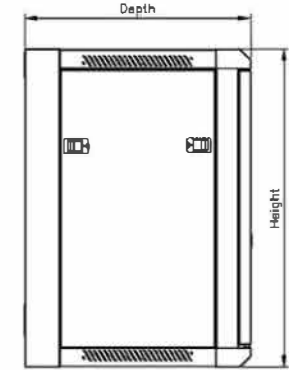


SIDE

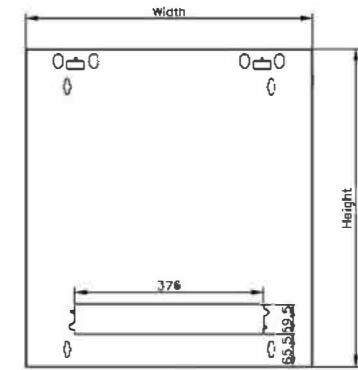


BACK

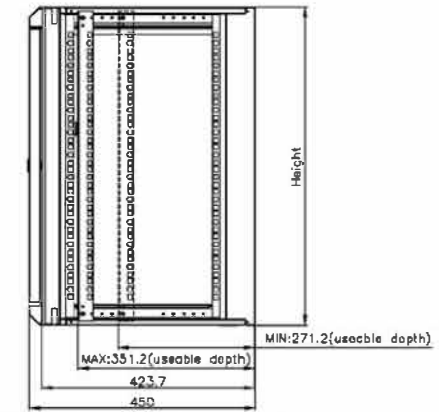

450 mm Depth



TOP




BOTTOM

Model No.	Height(U)	Width(mm)	Depth (mm)	Height(mm)
711715	6	570	450	370
711777	9	570	450	500
711869	12	570	450	635
711937	15	570	450	770

Standard:
Complies with ANSI/EIA RS-310-D, 1 EC60297-2, DIN41494;PART1; DIN41494; PART7
Material:
SPCC cold-rolled steel; rails: 1.2mm, other: 1.0mm
Static load: 60kg

- Flatpacked, volume is about 1/3 - 1/4 of assembled condition
- Cable entry via rear or top panel
- Steel front door with tempered glass, reversible, can be opened more than 180°

- Wallmounted for convenient installation, to prevent theft and to avoid accidental drop.
- Flat side panels
- Mounting profile installation depth can be adjusted
- 19" rackmount;



3D diagram

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co.,Ltd.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE: ±1°

TOLERANCE (INCH)		TOLERANCE (MM)	
x	±0.02"	x	±0.5mm
x.x	±0.01"	x.x	±0.20mm
x.xx	±0.008"	x.xx	±0.15mm
x.xxx	±0.005"	x.xxx	±0.10mm

INTRACOM 安達康股份有限公司
INTRACOM Asia Co.,LTD.

TITLE:	APPD	V-100843		
	Check			
CUSTOMER:	Drawer	Date		
CUSTOMER P/N:	Unit	mm	Projection	☺
ICT P/N:	Scale	1:1	Size	A4
DWG.NO:	Sheet	1 of	REV.	A

THIS DRAWING MAY BE USED IN WHOLE OR PART

1 2 3 4 5 6 7