




REV.	DESCRIPTION	ENG.	APPROVAL

- NOTES:
- 1.Operation Temperature:-40℃~+85℃.
 - 2.Electrial Characteristics:
 - 2.1>Rated Current:125V AC, 1.5A@25℃.
 - 2.2>Contact Resistance:20mΩ Max.
 - 2.3>Insulation Resistance:500MΩ Min,100V DC/min.
 - 2.4>Voltage Proof: 1000V AC/1 minute no breakdown.
 - 3.Mechanical Characteristics:
 - 3.1>Insertion Force & Withdrawal Force:30N Max.
 - 3.2>Durability:750 cycles Min.
 - 4.Environmental compliance:
 - 4.1>the products are compliant with the RoHS, and REACH etc.

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF INTRACOM Asia Co.,Ltd. AND SHALL NOT BE REPRODUCED COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF INTRACOM Asia Co.,Ltd.				 安達康股份有限公司 INTRACOM Asia Co.,LTD.					
				TITLE: INT Mod Plugs Cat6 FTP Solid 50" 90/Jar		APPD		VID	102012
						Check			
UNLESS OTHERWISE SPECIFIED:DIMENSIONS ARE IN MILLIMETERS ANGULAR TOLERANCE:±1°				CUSTOMER: 		Drawer		Date	2018-10-24
						CUSTOMER P/N:		Unit	mm
				ICT P/N: 790543		Scale	1:1	Size.	A4
				DWG.NO:		Sheet	1 of	REV.	A
TOLERANCE(INCH)		TOLERANCE(MM)							
x	±0.02"	x	±0.5mm						
x.x	±0.01"	x.x	±0.20mm						
x.xx	±0.008"	x.xx	±0.15mm						
x.xxx	±0.005"	x.xxx	±0.10mm						

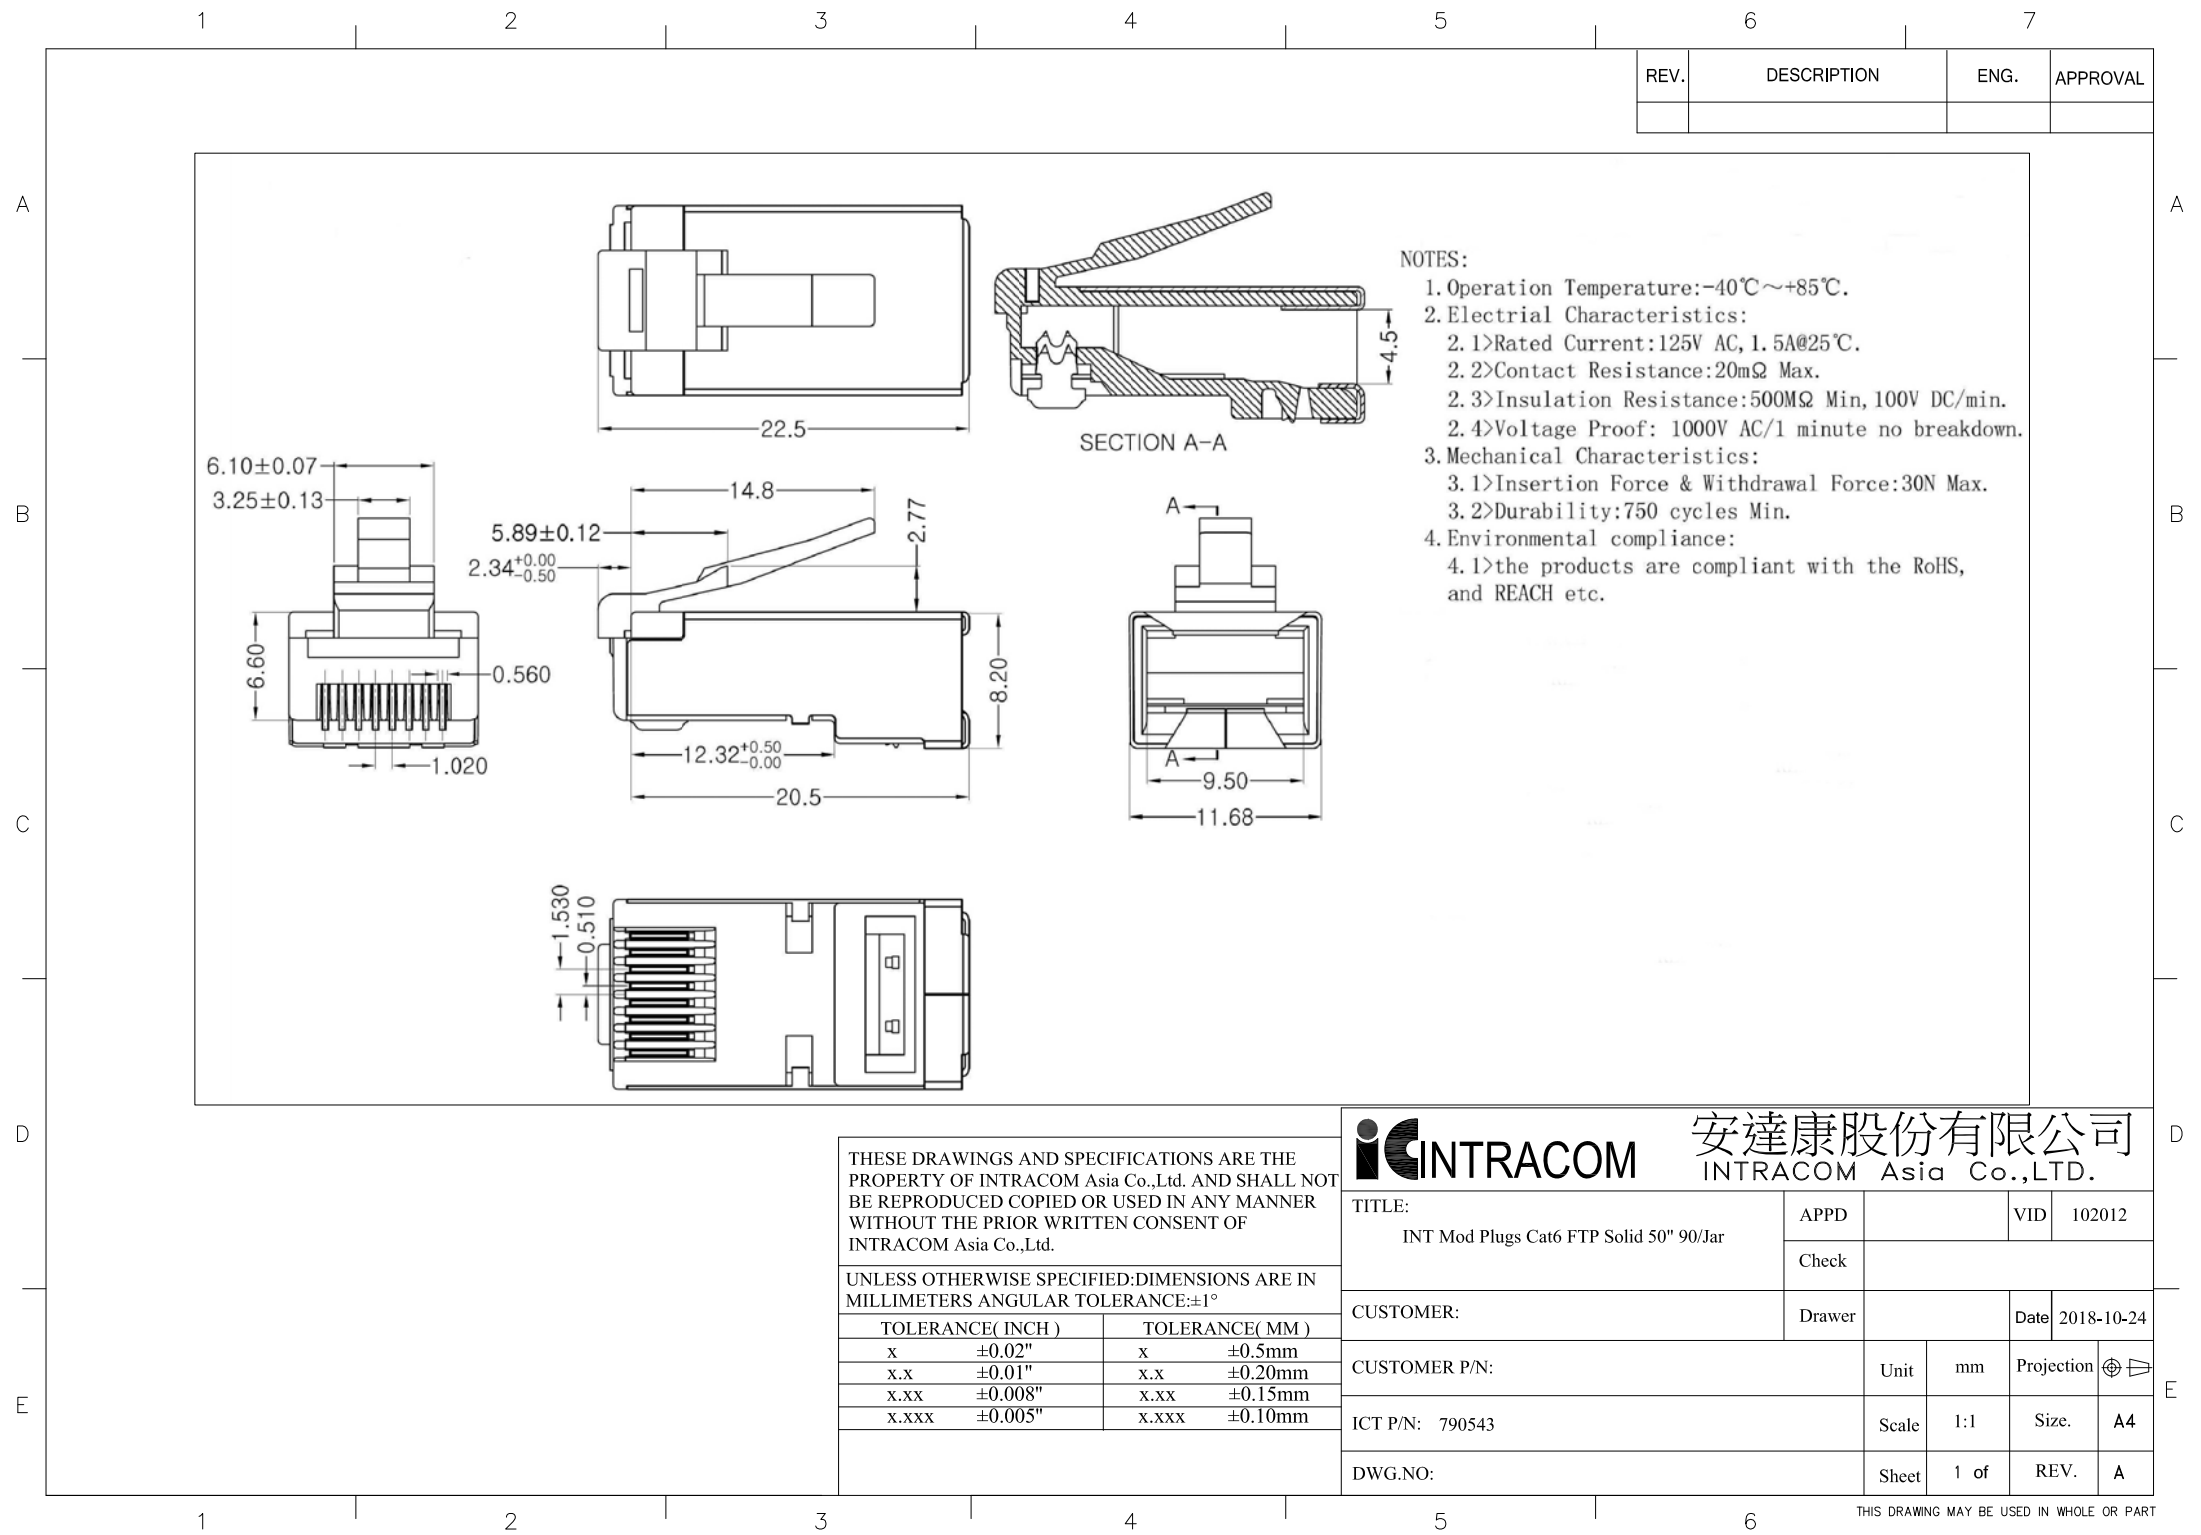