



## Cat6 Bulk Cable, Stranded, 24 AWG

UTP, 150 m (500 ft.), CM Rated, Easy-Pull Box, Gray

Part No.: 704403

EAN-13: 0766623704403 | UPC: 766623704403

For data, voice and video.

The INTELLINET NETWORK SOLUTIONS Cat6 Bulk Cable networks the infrastructure that enables high-speed transmission of data, voice and video applications — up to 250 MHz.

The Cat6 Bulk Cable meets EIA/TIA standards, and is flame retardant rated.

### Features

- Flame Retardant Rating: CM In-wall rated; permitted in 1-2 family residential riser applications, or in riser with raceway/fireproof shaft; not permitted in plenums
- Standards Tested: Meets or exceeds current Cat6 standards
- Length Usage Log on Box: Track remaining cable available for next job

### Lifetime Warranty

Strict manufacturing standards ensure the highest quality in all INTELLINET NETWORK SOLUTIONS products. All items carry a full Lifetime Warranty — the strongest quality commitment anyone can make.

### Features:

- Unshielded twisted pair
- Can be used in riser with raceway/fireproof shaft
- Meets or exceeds current Cat6 standards
- Length usage log on box to track remaining cable available for next job
- Lifetime Warranty

### Specifications:

#### General

- Gray colored
- Unshielded twisted 4-pair


For more information on Intellinet products, consult your local dealer or visit [www.intellinet-network.com](http://www.intellinet-network.com).

All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.

- 24 AWG
- Stranded core
- PVC jacket
- Meets or exceeds Cat6 specifications
- Rated to 250 MHz
- Ideal for carrying data, audio and video
- Flame retardant rating: CM
- In-wall rated; permitted in 1-2 family residential riser applications, or in riser with raceway/fireproof shaft; not permitted in plenums
- UL approved

#### Technical

- TIA Cat6 channel test 250 MHz:
  - Return loss (db) = 17.32
  - Attenuation (db/100) = 33.04
  - Near-end crosstalk (db) = 38.3
  - Power sum-NEXT (db) = 36.3
  - Equal level-FEXT (db) = 19.8
  - Power sum-ELFEXT (db) = 16.8

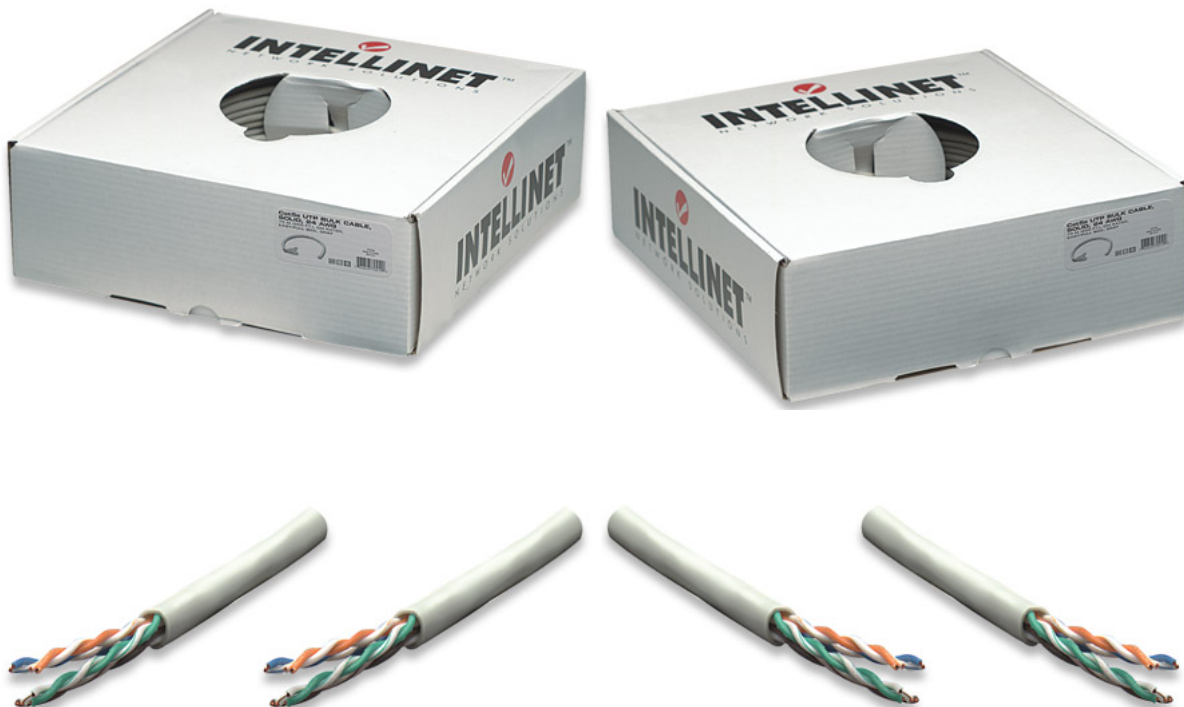

For more information on Intellinet products, consult your local dealer or visit [www.intellinet-network.com](http://www.intellinet-network.com).

All names of products or services mentioned herein are trademarks or registered trademarks of their respective owners. Distribution and reproduction of this document, and use and disclosure of the contents herein, are prohibited unless specifically authorized.

