



PRODUCT SPECIFICATION

GENERAL

FINISH:	Polished Chrome	GROSS WEIGHT:	4.22 (lbs)
MAIN MATERIAL:	Metal - Mild Steel	CLASS:	cETLus (Class I)
DIMENSIONS:	H: 350mm W: 60mm D: 178mm H: 13.78" W: 2.36" D: 7.01"	LISTING LOCATION:	Dry
INSTALLATION ORIENTATION:	Wall Mount - Vertical	FITTING METHOD:	4" Octagon Box with included Canopy Kit 1/2" Stub Mount
CUT OUT HOLE:	Not Applicable	ADA COMPLIANT:	No
RECESS DEPTH:	Not Applicable	IC RATING:	Not Applicable
FIRE RATING:	Not Applicable	VOLTAGE:	Mains 120 (V)
CABLE LENGTH:	Not Applicable		

MAIN LAMP

LIGHT SOURCE:	E26/Medium	MACADAM ELIPSE:	Not Applicable
MAXIMUM WATTAGE:	40W Max	UGR:	Not Applicable
MAXIMUM LAMP LENGTH:	120mm / 4.72"	BEAM ANGLE:	Not Applicable
LAMP INCLUDED?	No	AVERAGE LIFESPAN:	Lamp Dependent
DELIVERED LUMENS:	Lamp Dependent	L70:	Not Applicable
COLOR TEMP:	Lamp Dependent		
CRI:	Lamp Dependent		
R9:	Lamp Dependent		





ADDITIONAL LAMP

LIGHT SOURCE:	High Power LED	MACADAM ELLIPSE:	3-Step
MAXIMUM WATTAGE:	1W Max	UGR:	Not Applicable
LAMP INCLUDED?	Yes (Integral)	BEAM ANGLE:	45 Degrees
DELIVERED LUMENS:	111.1 (lm)	TILT ADJUSTMENT ANGLE:	90 Degrees
COLOR TEMP:	2700 (K)	ROTATION ADJUSTMENT ANGLE:	330 Degrees
CRI:	80	AVERAGE LIFESPAN:	To Be Advised
R9:	To Be Advised	L70:	To Be Advised


ELECTRICAL

SWITCHED:	Yes	DRIVER / BALLAST VOLTAGE:	100-240 (V)
DIMMABLE:	No	DRIVER AVERAGE LIFESPAN:	30,000 (Hrs)
DIMMING METHOD:	Not Applicable	MAIN LAMP EFFICACY:	Lamp Dependent
DRIVER OUTPUT CURRENT:	350 (mA)	ADDITIONAL LAMP EFFICACY:	To Be Advised
DRIVER OUTPUT VOLTAGE:	Not Applicable	DRIVER INCLUDED?	Yes (Integral)
SUPPLY FREQUENCY:	50/60 (Hz)		


PRODUCT ELEVATIONS

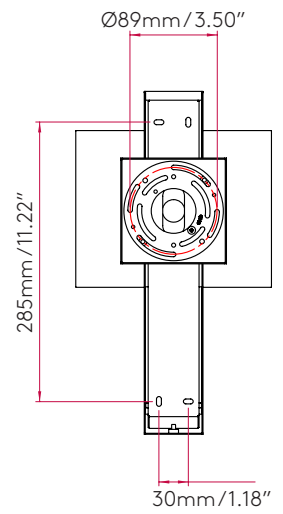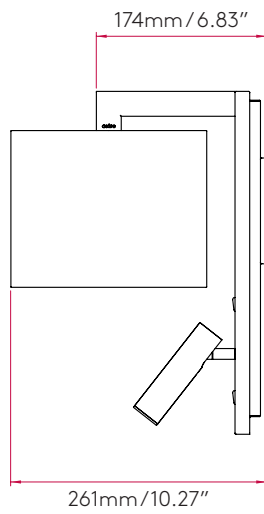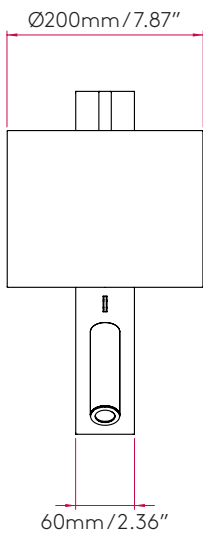

ADDITIONAL INFORMATION



SHADE SOLD SEPARATELY



BOX QUANTITY X6

T: +1 800-240 7071 (toll free)

T: +1 732-428 5551

E: orders@astrolighting.com

us.astrolighting.com