ENNA SQUARE SWITCHED 7754

astro





PRODUCT SPECIFICATION

GENERAL

FINISH: White

MAIN MATERIAL: Metal - Aluminium

DIMENSIONS: H:110mm W:110mm D:130mm

H:4.33" W:4.33" D: 5.11"

INSTALLATION ORIENTATION: Wall Mount - Vertical

CUT OUT HOLE: Not Applicable 31mm/1.22" **RECESS DEPTH:** FIRE RATING: Not Applicable CABLE LENGTH: Not Applicable **GROSS WEIGHT:** To Be Advised

CLASS: cETLus (Class I)

LISTING LOCATION: Dry

FITTING METHOD: 4" Octagon Box

ADA COMPLIANT: Yes

IC RATING: Not Applicable **VOLTAGE:** Mains 120 (V)

LAMP

LIGHT SOURCE: High Power LED MACADAM ELIPSE: 3-Step

MAXIMUM WATTAGE: 3W UGR:

Not Applicable MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** To Be Advised LAMP INCLUDED? TILT ADJUSTMENT ANGLE: Yes (Integral) 90 (Degrees) **DELIVERED LUMENS:** To Be Advised ROTATION ADJUSTMENT ANGLE: 330 (Degrees) COLOR TEMP: 2700K AVERAGE LIFESPAN: To Be Advised CRI: 80 L70: To Be Advised

R9: To Be Advised

ELECTRICAL


SWITCHED: SUPPLY FREQUENCY: 50/60 (Hz) Yes DIMMABLE: No DRIVER/BALLAST VOLTAGE: 100-240 (V) 60,000 (Hrs) DIMMING METHOD: Not Applicable DRIVER AVERAGE LIFESPAN:

DRIVER OUTPUT CURRENT: 700 (mA) EFFICACY: To Be Advised DRIVER OUTPUT VOLTAGE: DRIVER/BALLAST INCLUDED? Not Applicable Yes (Integral)

ADDITIONAL INFORMATION



BOX QUANTITY: To Be Advised

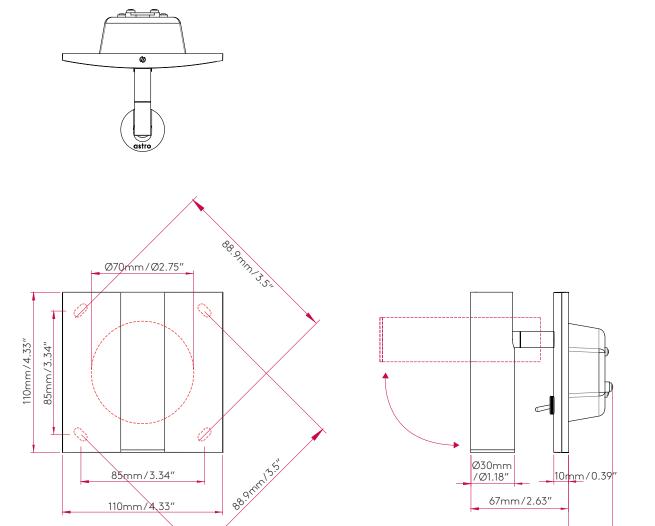

T: +1 800-240 7071 (toll free) T: +1 732-428 5551 E: infous@astrolighting.com us.astrolighting.com

31mm/1.22"