## VANCOUVER 45 ROUND 5696

# astro


0.11(lbs)

cETLus (Class 2)

## SKU 1229009



#### Luminous Intensity Distribution Curve



### PRODUCT SPECIFICATION

#### **GENERAL**

FINISH: Clear

MAIN MATERIAL:Plastic - AcrylicCLASS:DIMENSIONS:D:38mm Ø:45mmLISTING LOCATION:

EISTING EGGATION.

**GROSS WEIGHT:** 

D:1.5" Ø:1.77" FITTING METHOD: Recessed in Drywall Ceiling

ADA COMPLIANT: Yes

INSTALLATION ORIENTATION: Ceiling Mount ADA COMPLIANT: Yes

CLIT OUT HOLE: 35mm/1-3/8" IC RATING: Non IC

CUT OUT HOLE: 35mm/1-3/8" IC RATING: Non IC Rated

RECESS DEPTH: 150mm/5.9" VOLTAGE: Constant Current 700 (mA)

FIRE RATING:

Not Applicable

CABLE LENGTH:

Not Applicable

LAMP

LIGHT SOURCE:High Power LEDMACADAM ELIPSE:To Be AdvisedMAXIMUM WATTAGE:1 x 3WUGR:To Be Advised

MAXIMUM LAMP LENGTH: Not Applicable **BEAM ANGLE:** Not Applicable LAMP INCLUDED? Yes (Integral) TILT ADJUSTMENT ANGLE: Not Applicable **DELIVERED LUMENS:** 117.1 (lm) ROTATION ADJUSTMENT ANGLE: Not Applicable **COLOR TEMP:** 3000 (K) AVERAGE LIFESPAN: 60,500 (Hrs) To Be Advised

CRI: 80 L70: R9: 10

ELECTRICAL


SWITCHED:NoSUPPLY FREQUENCY:Not ApplicableDIMMABLE:YesDRIVER/BALLAST VOLTAGE:Not ApplicableDIMMING METHOD:Control Gear DependantDRIVER AVERAGE LIFESPAN:Not Applicable


DRIVER OUTPUT CURRENT:Not ApplicableEFFICACY:28.3 (lm/w)DRIVER OUTPUT VOLTAGE:Not ApplicableDRIVER INCLUDED?Not Applicable

#### ADDITIONAL INFORMATION



**BOX QUANTITY X50** 

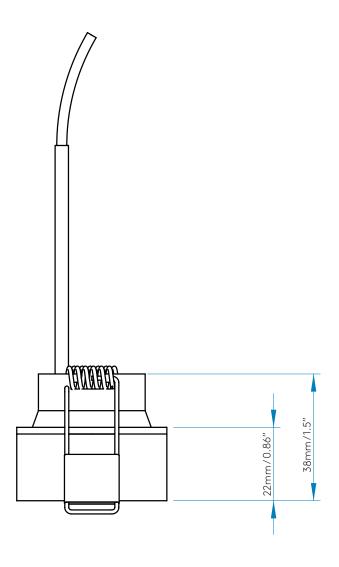

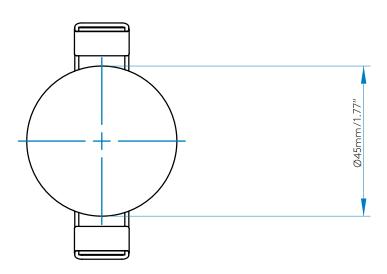

T: +1 800-240 7071 (toll free) T: +1 732-428 5551 E: infous@astrolighting.com us.astrolighting.com