

GENERAL

LOCATION:	Bathroom
CLASS:	cETLus (Class 2)
LOCATION RATING:	Damp
DRIVER REQUIRED:	Constant Current 350mA
INSTALLATION ORIENTATION:	Wall Mount - Vertical
FITTING METHOD:	½" Stub Mount
MAIN MATERIAL:	Metal - Zinc
DIMENSIONS (mm):	H: 100 W: 35 D: 50
DIMENSIONS (inch):	H: 3.94 W: 1.38 D: 1.97
CUT OUT HOLE (mm/inch):	-
RECESS DEPTH (mm/inch):	-
FIRE RATING:	-
CABLE LENGTH (mm/inch):	-
GROSS WEIGHT (lb):	1.25
ADA COMPLIANT:	Yes
IC RATING:	Non IC Rated

LAMP


LIGHT SOURCE:	High Powered LED
WATTAGE:	2 X 1W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH (mm/inch):	-
LUMINOUS FLUX (lm):	85
COLOUR TEMP (K):	2700
CRI (Ra):	80
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE (°):	-
ROTATION ADJUSTABLE ANGLE (°):	-
LIFETIME (hrs):	60000
BEAM ANGLE (°):	69

ELECTRICAL

SWITCHED:	No
DIMMABLE:	Yes
DIMMING METHOD:	Control Gear Dependent
SUPPLY FREQUENCY (Hz):	-
DRIVER/BALLAST VOLTAGE (V):	-
DRIVER LIFETIME (hrs):	-
EFFICACY (lm/W):	24

ADDITIONAL INFORMATION:


SHADE INCLUDED:	-
SHADE/DIFFUSER MATERIAL:	-
SHADE/DIFFUSER FINISH	-
F MARK:	-



CODE: 1146013 (8442)
FINISH: POLISHED CHROME



CODE: 1146014 (8443)
FINISH: MATT NICKEL







CODE: 1146015 (8444)
FINISH: MATT WHITE



CODE: 1146016 (8469)
FINISH: MATT GREY

TO MAINTAIN THIS PRODUCT TO ITS BEST CONDITION, PLEASE VIEW OUR CARE AND CLEANING GUIDELINES ON THE SUPPORT SECTION OF THE ASTRO WEBSITE.

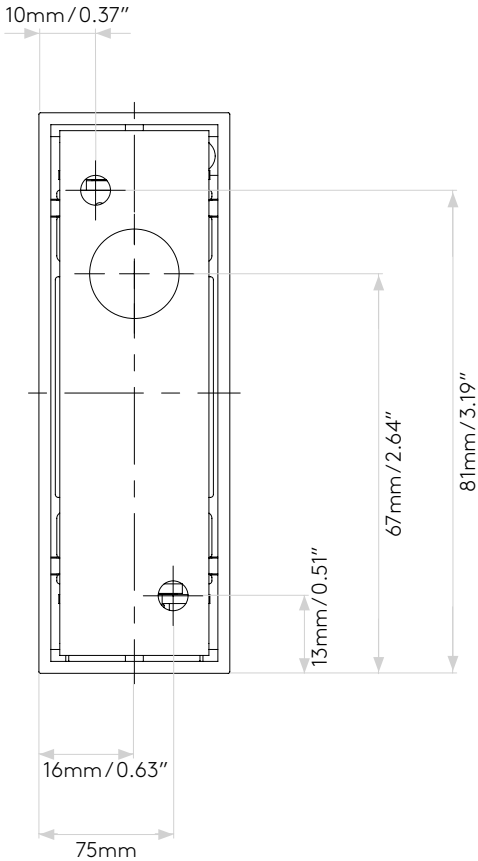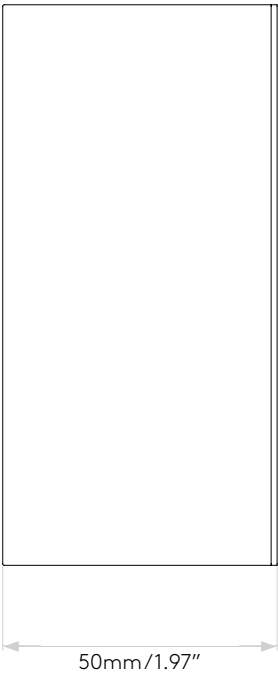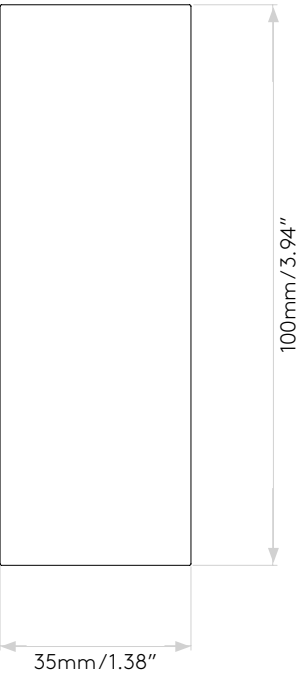

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.