

ENNA SURFACE ROUND LED

astro

GENERAL

LOCATION:	Interior
CLASS:	cETLus (Class 1)
LOCATION RATING:	Dry
DRIVER REQUIRED:	Mains 120V
INSTALLATION ORIENTATION:	Wall Mount
FITTING METHOD:	½" Stub Mount or 4" Octagon Box
MAIN MATERIAL:	Metal - Zinc
DIMENSIONS (mm):	D: 141 Ø: 110
DIMENSIONS (inch):	D: 5.5 Ø: 4.33
CUT OUT HOLE (mm/inch):	-
RECESS DEPTH (mm/inch):	-
FIRE RATING:	-
CABLE LENGTH (mm/inch):	-
GROSS WEIGHT (lb):	1.54
ADA COMPLIANT:	No
IC RATING:	-

LAMP


LIGHT SOURCE:	High Powered LED
WATTAGE:	4.1W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH (mm/inch):	-
LUMINOUS FLUX (lm):	149
COLOUR TEMP (K):	2700
CRI (Ra):	80
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE (°):	90
ROTATION ADJUSTABLE ANGLE (°):	330
LIFETIME (hrs):	60000
BEAM ANGLE (°):	17

ELECTRICAL


SWITCHED:	Yes
DIMMABLE:	No
DIMMING METHOD:	-
SUPPLY FREQUENCY (Hz):	50-60
DRIVER/BALLAST VOLTAGE (V):	100-277
DRIVER LIFETIME (hrs):	30000
EFFICACY (lm/W):	36

ADDITIONAL INFORMATION:

SHADE INCLUDED:	-
SHADE/DIFFUSER MATERIAL:	-
SHADE/DIFFUSER FINISH	-
F MARK:	Suitable for mounting on flammable materials




CODE: 1058123 (8634)
FINISH: MATT WHITE



CODE: 1058124 (8635)
FINISH: MATT BLACK



CODE: 1058125 (8636)
FINISH: MATT NICKEL







CODE: 1058126 (8637)
FINISH: BRONZE



CODE: 1058127 (8638)
FINISH: MATT GOLD

TO MAINTAIN THIS PRODUCT TO ITS BEST CONDITION, PLEASE VIEW
OUR CARE AND CLEANING GUIDELINES ON THE SUPPORT SECTION OF
THE ASTRO WEBSITE.

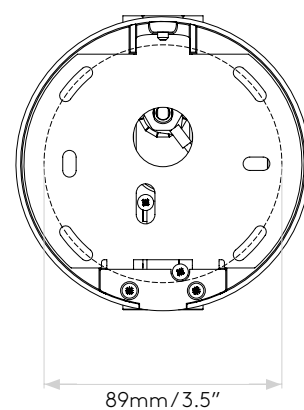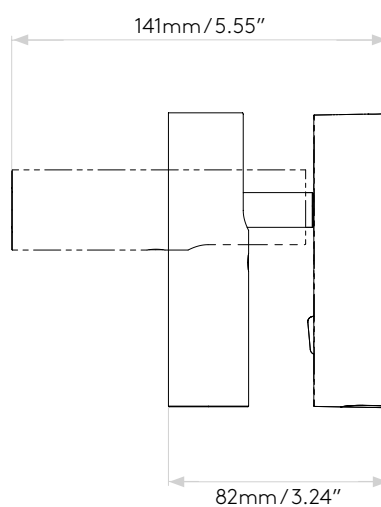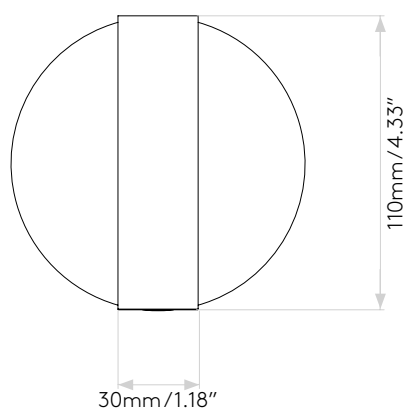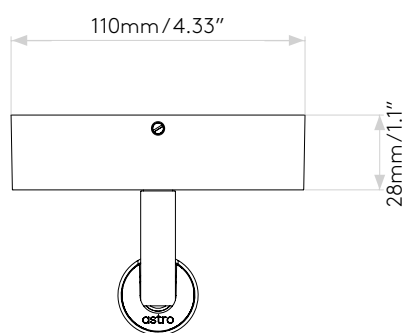

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.