

GENERAL

|                           |                         |
|---------------------------|-------------------------|
| LOCATION:                 | Interior                |
| CLASS:                    | cETLus (Class I)        |
| LOCATION RATING:          | Dry                     |
| DRIVER REQUIRED:          | Mains 120V              |
| INSTALLATION ORIENTATION: | Wall Mount - Horizontal |
| FITTING METHOD:           | Included Junction Box   |
| MAIN MATERIAL:            | Metal - Zinc            |
| DIMENSIONS (mm):          | H: 80 W: 190 D: 68      |
| DIMENSIONS (inch):        | H: 3.15 W: 7.48 D: 2.68 |
| CUT OUT HOLE (mm/inch):   | L: 2.6 W: 6.81          |
| RECESS DEPTH (mm/inch):   | 64/2.52                 |
| FIRE RATING:              | -                       |
| CABLE LENGTH (mm/inch):   | -                       |
| GROSS WEIGHT (lb):        | 3.34                    |
| ADA COMPLIANT:            | No                      |
| IC RATING:                | IC Rated                |

LAMP

|                                |                  |
|--------------------------------|------------------|
| LIGHT SOURCE:                  | High Powered LED |
| WATTAGE:                       | 3W               |
| LAMP INCLUDED:                 | Yes (Integral)   |
| MAXIMUM LAMP LENGTH (mm/inch): | -                |
| LUMINOUS FLUX (lm):            | 114              |
| COLOUR TEMP (K):               | 2700             |
| CRI (Ra):                      | 80               |
| MACADAM ELLIPSE:               | 3-Step           |
| TILT ADJUSTABLE ANGLE (°):     | 90               |
| ROTATION ADJUSTABLE ANGLE (°): | 180              |
| LIFETIME (hrs):                | To Be Advised    |
| BEAM ANGLE (°):                | 25.6             |

ELECTRICAL

|                             |         |
|-----------------------------|---------|
| SWITCHED:                   | Yes     |
| DIMMABLE:                   | No      |
| DIMMING METHOD:             | -       |
| SUPPLY FREQUENCY (Hz):      | 50/60   |
| DRIVER/BALLAST VOLTAGE (V): | 100-240 |
| DRIVER LIFETIME (hrs):      | 60000   |
| EFFICACY (lm/W):            | 30      |

ADDITIONAL INFORMATION:

|                          |                                                  |
|--------------------------|--------------------------------------------------|
| SHADE INCLUDED:          | -                                                |
| SHADE/DIFFUSER MATERIAL: | -                                                |
| SHADE/DIFFUSER FINISH    | -                                                |
| F MARK:                  | Not suitable for mounting on flammable materials |



CODE: 1323004 (7209)  
FINISH: POLISHED CHROME



CODE: 1323005 (7210)  
FINISH: MATT NICKEL




CODE: 1323009 (7774)  
FINISH: MATT GOLD



CODE: 1323016 (8239)  
FINISH: BRONZE

TO MAINTAIN THIS PRODUCT TO ITS BEST CONDITION, PLEASE VIEW OUR CARE AND CLEANING GUIDELINES ON THE SUPPORT SECTION OF THE ASTRO WEBSITE.

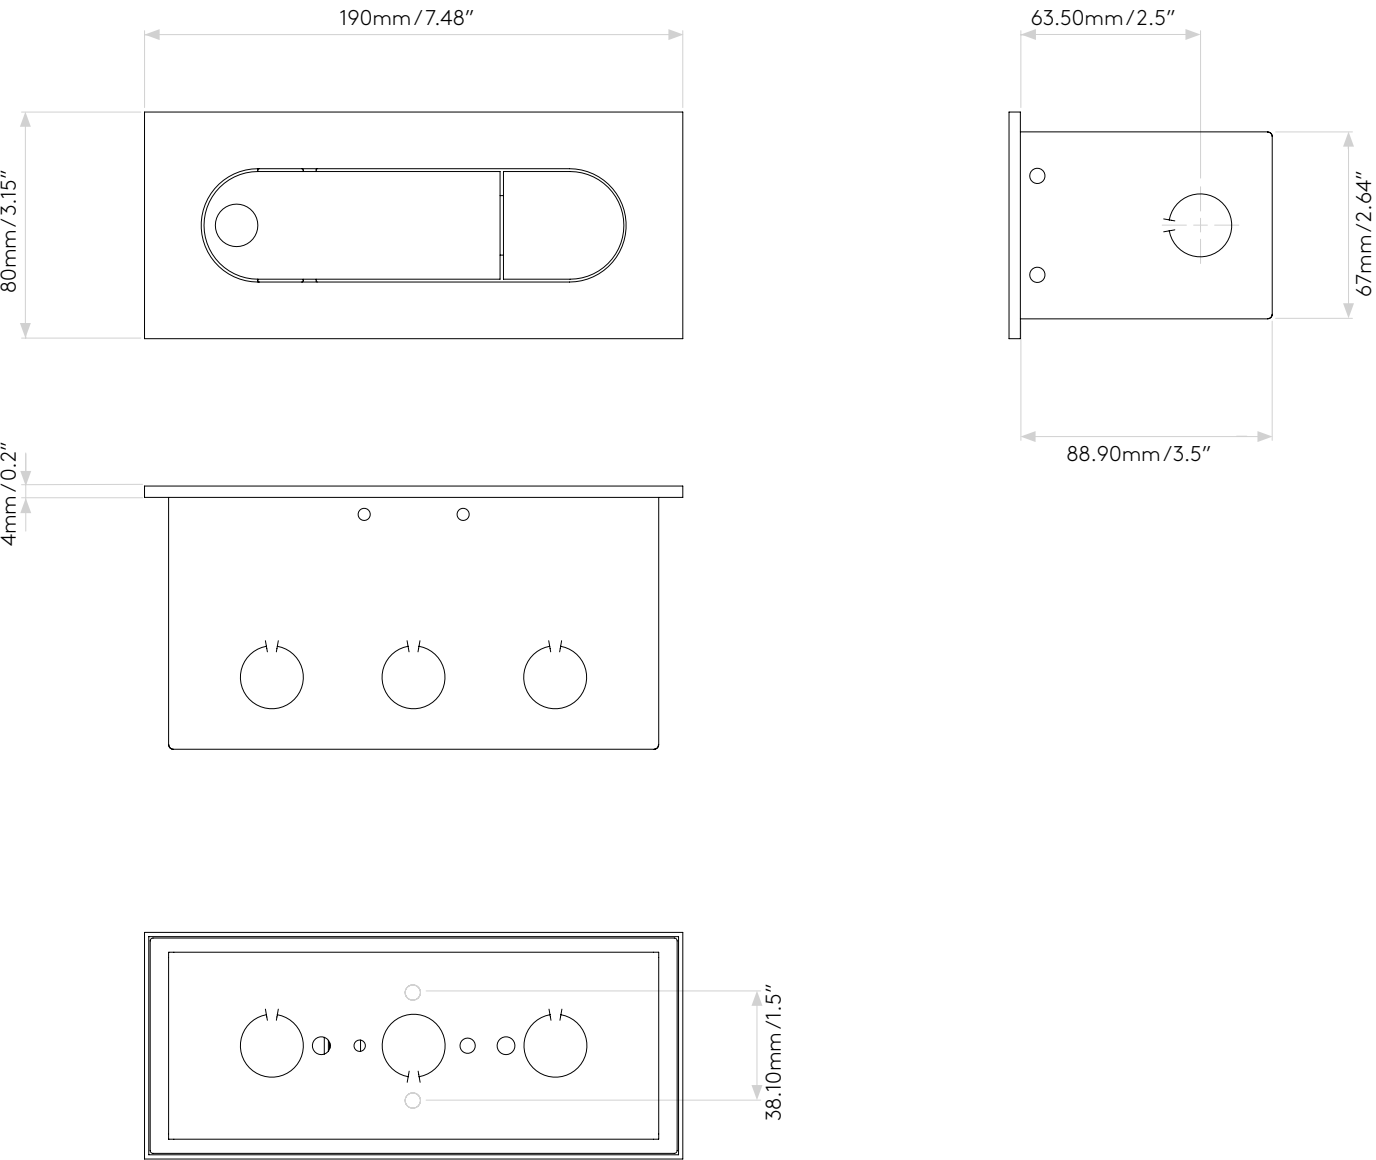

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.