

SPARTA 600 LED

astro

GENERAL

LOCATION:	Bathroom
CLASS:	cETLus (Class 1)
LOCATION RATING:	Damp
DRIVER REQUIRED:	Mains 120V
INSTALLATION ORIENTATION:	Wall Mount - Horizontal & Vertical
FITTING METHOD:	4" Octagon Box with Canopy Kit
MAIN MATERIAL:	Metal - Aluminium
DIMENSIONS (mm):	H: 600 W: 33 D: 80
DIMENSIONS (inch):	H: 23.62 W: 1.3 D: 3.15
CUT OUT HOLE (mm/inch):	-
RECESS DEPTH (mm/inch):	-
FIRE RATING:	-
CABLE LENGTH (mm/inch):	-
GROSS WEIGHT (lb):	2.4
ADA COMPLIANT:	Yes
IC RATING:	-

LAMP

LIGHT SOURCE:	Mid-Power LED
WATTAGE:	7.2W
LAMP INCLUDED:	Yes (Integral)
MAXIMUM LAMP LENGTH (mm/inch):	-
LUMINOUS FLUX (lm):	709
COLOUR TEMP (K):	3000
CRI (Ra):	80
MACADAM ELLIPSE:	3-Step
TILT ADJUSTABLE ANGLE (°):	-
ROTATION ADJUSTABLE ANGLE (°):	-
LIFETIME (hrs):	54000
BEAM ANGLE (°):	-

ELECTRICAL

SWITCHED:	No
DIMMABLE:	Yes
DIMMING METHOD:	0-10V
SUPPLY FREQUENCY (Hz):	50/60
DRIVER/BALLAST VOLTAGE (V):	100-277
DRIVER LIFETIME (hrs):	63500
EFFICACY (lm/W):	99

ADDITIONAL INFORMATION:


SHADE INCLUDED:	-
SHADE/DIFFUSER MATERIAL:	Plastic
SHADE/DIFFUSER FINISH	White
F MARK:	-



CODE: 1322009 (8378)
FINISH: POLISHED CHROME

TO MAINTAIN THIS PRODUCT TO ITS BEST CONDITION, PLEASE VIEW OUR CARE AND CLEANING GUIDELINES ON THE SUPPORT SECTION OF THE ASTRO WEBSITE.

ASTRO® IS A REGISTERED TRADEMARK OF ASTRO LIGHTING LIMITED. ASTRO LIGHTING'S FIXTURE DESIGNS AND IMAGERY ARE PROTECTED UNDER U.S. AND INTERNATIONAL INTELLECTUAL PROPERTY LAWS, AND ALL RIGHTS TO SUCH DESIGNS AND IMAGERY ARE EXPRESSLY RESERVED.

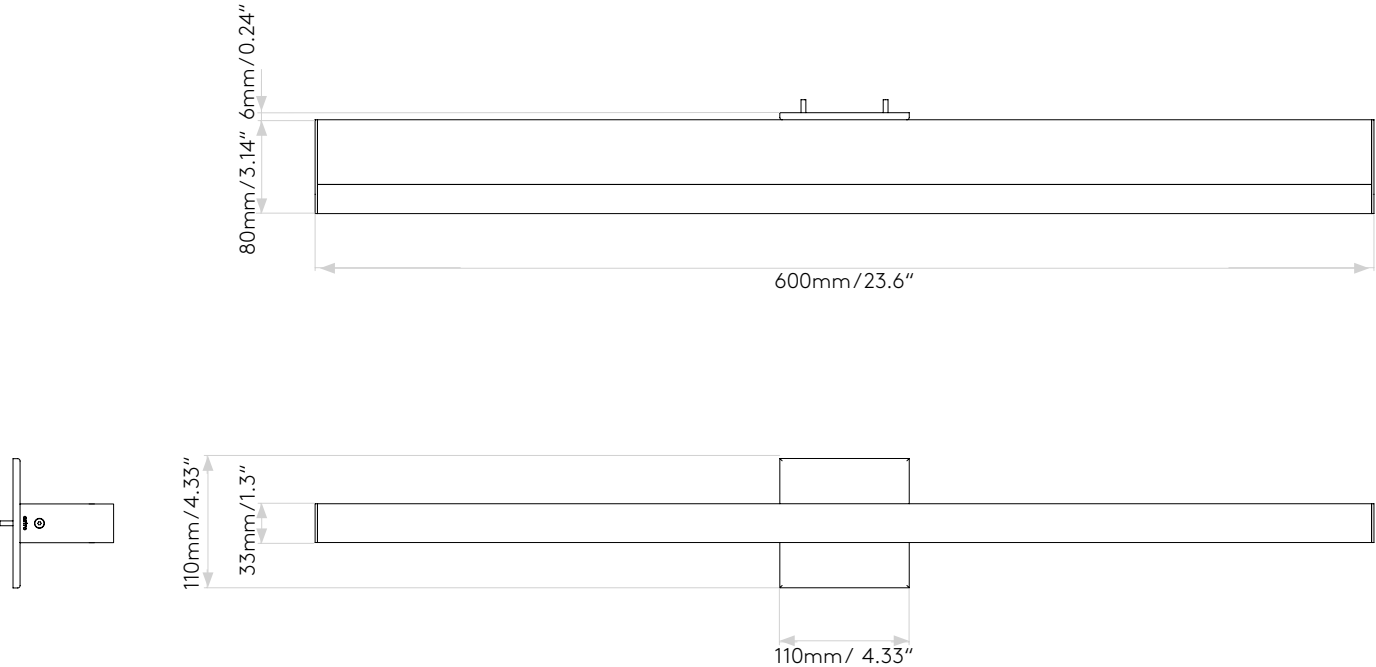

Please note that some dimensions may vary slightly due to manufacturing tolerances, this includes cable entry and fixing holes

Veuillez noter que certaines dimensions peuvent varier légèrement en raison des tolérances de fabrication, y compris l'entrée de câble et les trous de fixation.

Bitte beachten Sie, dass die Maße Fertigungstoleranzen unterliegen und daher in geringem Umfang von der angegebenen Größe abweichen können. Dies gilt auch für Kabeleingänge und Befestigungslöcher.

Si prega notare che possono esserci piccole variazioni in alcune dimensioni dovute alle tolleranze di produzione, queste includono l'ingresso del cavo e i fori di fissaggio.