

# LED Puck Light

## Architectural Ultra-Low Profile LED System

One of the most energy efficient products in the market, Nora's LED Puck Light system is ideal for accent, under cabinet, in cabinet, display cases, niche, furniture, jewelry cases, and other applications with limited space. These ultra low-profile fixtures are easy to install and can be linked together to provide excellent and even illumination on all surfaces. LED's have no forward heat, UV or infrared rays to harm artwork, retail displays or heat sensitive foods.



## FEATURES

- 4.2W producing up to 210 lumens
- 12V DC system
- Daisy-chain up to ten pucks at 90' max distance per run
- Available in single units or a three-puck kit
- Available in 3000K and 4200K
- Well suited for very small spaces: 1/2" deep with 2-3/4" diameter
- Die cast aluminum construction
- Easy installation using one screw
- 3", 6", 12", and 24" interconnectors included with each puck
- Dimmable with dimmable power supply
- RoHS compliant
- Title 24 compliant, and cETL listed for dry locations
- 30,000 hours of rated lamp life
- Available in Bronze, Chrome or White finishes



### LED Puck Light

NMPK1-3LED30(finish)	12V 4.2W LED Puck light, 3000K
NMPK1-3LED42(finish)	12V 4.2W LED Puck light, 4200K
NMPK2-3LED30(finish)*	12V 12.6W LED 3 Puck Light Kit, 3000K

\*Kit Includes: (3) 3000K LED Pucks, (3) sets of 3", 6", 12" & 24" interconnection cables, (1) 12" Power Line Interconnector with switch, (3) mounting clips and (1) 24W Direct Plug-In Driver.

**Color Temp.:** 3000K Warm White (30), 4200K Cool White (42)  
**Finish:** Bronze (BZ), Chrome (C), White (W)

**Dimensions:** W: 2-3/4"

Illuminating the *future*...since 1989

# LED Puck Light Accessories



## Splitter

**NAPK-701** Finish: B, W  
**Description:** To separate 3 puck light runs from a single driver or to split a run between puck lights. One in and three out.  
**Dim:** L: 1-5/8" W: 1" D: 1/2"



## Interconnection Cable

**NAPK-702** 2" Cable  
**NAPK-703** 3" Cable  
**NAPK-706** 6" Cable  
**NAPK-712** 12" Cable  
**NAPK-724** 24" Cable  
**NAPK-736** 36" Cable  
**NAPK-748** 48" Cable



## 18" Power Line Interconnector

**NAPK-709** Finish: B, W  
**Description:** Used to connect puck light to a driver.

**Finish:** Black (B), White (W)

**Description:** Allows easy linking of two puck lights. Can be joined together with NAPK-713 Mini Coupler



## 12" Power Line Interconnector with On/Off Switch

**NAPK-711** Finish: B, W  
**Description:** Used to connect puck light to driver and allow individual switching of any LED Puck Light run.




## Mini Coupler

**NAPK-713** Finish: B, W  
**Description:** Used to connect two interconnection cables together or to lengthen a Power Line Interconnector.  
**Dim:** L: 3/4" W: 3/8" D: 3/8"



## Class II Electronic LED Driver

**NATL-530HW/12** 30W  
**NATL-560HW/12** 60W  
**Voltage:** 12V DC  
**Input Wire:** 4" Input Wire  
**Output Wire:** 3-1/4" Wire  
**Requires:** NUSP-JBox for hard wiring or NRA-6035 for Plug-In



## Flexible Extension Cables

**NRA-125/6** 6" Cable  
**NRA-125/12** 18" Cable  
**NRA-125/18** 36" Cable  
**NRA-125/72** 72" Cable

**Description:** Used to extend length between NUSP-JBox and NAPK-530HW/12 or NAPK-560HW/12. Can be joined together to create custom lengths.



## Flexible Power Cord

**NRA-6035W/6** 6' Cable  
**NRA-6035W/10** 10' Cable  
**Description:** Used to convert NAPK-530HW/12 or NAPK-560HW/12 into a direct plug-in driver.



## Junction Box for Hard Wiring

**NUSP-JBox**  
**Description:** To be used with NAPK-530HW/12 or NAPK-560HW/12 Drivers. Capable of feeding two separate LED Drivers. Accepts Romex® or flex



## 12V DC Direct Plug-In Electronic Drivers

**NAPK-524/12** 24W  
**Cable Length:** 6 Feet  
**NAPK-550/12** 50W  
**Primary Cable Length:** 6 Feet  
**Secondary Cable Length:** 5 Feet



## Dimmable Class II Remote Hardwire Magnetic Power Supply


**NMT-60/12C2** 60W  
**Voltage:** 12V DC  
**Cable Length:** 10' included (30' Cable ordered separately)



## 12V Power Line Connector

**NAPK-10** 10' Cable  
**NAPK-30** 30' Cable  
**Description:** To be used with NMT-60/12C2 Class II LED Driver. Use with NAPK-709 or NAPK-711 to power a 12V LED Puck Run.

## SAMPLE LAYOUT

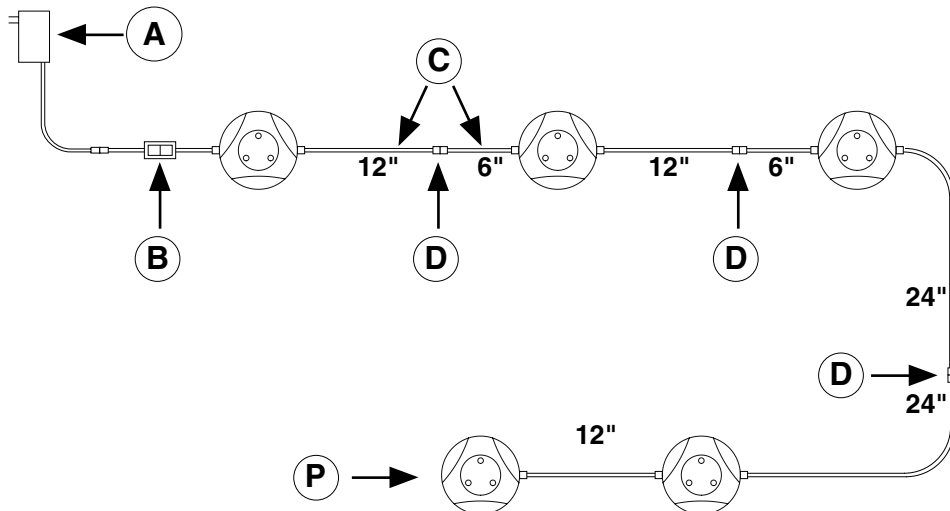

<b>A</b>	NAPK-524/12	24W Direct Plug-In Driver
<b>B</b>	NAPK-711	12" Power Line Interconnector with Switch
<b>C</b>	NAPK-702	2" Interconnection Cable
	NAPK-703	3" Interconnection Cable (included w/ ea. Puck)
	NAPK-706	6" Interconnection Cable (included w/ ea. Puck)
	NAPK-712	12" Interconnection Cable (included w/ ea. Puck)
	NAPK-724	24" Interconnection Cable (included w/ ea. Puck)
	NAPK-736 NAPK-748	36" Interconnection Cable 48" Interconnection Cable
<b>D</b>	NAPK-713	Mini Coupler
<b>P</b>	NMPK1-3LED	LED Puck Light