

### 120V ARCHITECTURAL LED SURFACE LUMINAIRE

PROJECT

TYPE

CATALOG NUMBER

#### PRODUCT DESCRIPTION:

Round LED surface Luminaire 6" or 8", Only 12W and 15W nominal, 36,000 hour LED life. Designed for ceiling, commercial and architectural applications.

#### PRODUCT SPECIFICATIONS

**Construction:** Poly housing and white opal lens

**Electrical:** 120 VAC, 12W and 15W

**Color Temperature:** 2700k 90+ CRI  
or 3000K 80+ CRI, or 4000K 80+ CRI

**Dimming:** With standard leading edge triac dimmers

**Mounting:** Mounts to standard ceiling fixture box


**Listing:** Wet listed CSA and Energy star compliant and cETLus.



T24  
2005




Recess kit for mounting to existing recessed cans sold separately, S4-RKT S6-RKT

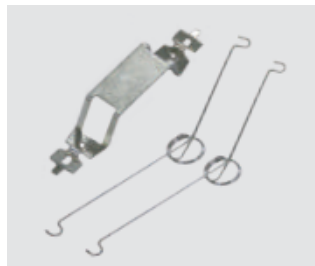

5.9", 7.4" dia

1 - 1/4" deep

#### J-box Mounting

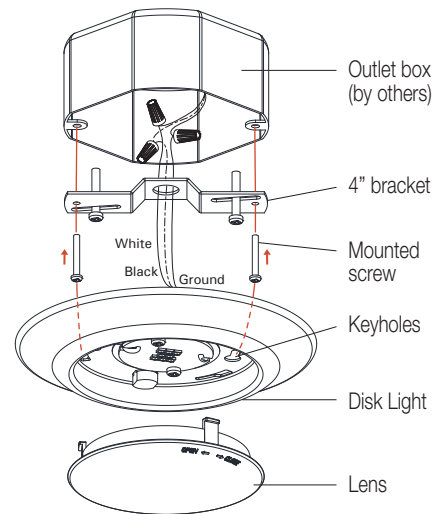

Model Number	Diameter	Color*	LED Wattage	Lumens	Finish	LED Life
S4-2790-WH	5.9"	2700K	12W	540 / 90 CRI	White	50,000 HRS.
S4-3080-WH	5.9"	3000K	12W	670 / 80 CRI	White	50,000 HRS.
S6-2790-WH	7.4"	2700K	15W	920 / 90 CRI	White	50,000 HRS.
S6-3080-WH	7.4"	3000K	15W	950 / 80 CRI	White	50,000 HRS.
S6-4080-WH	7.4"	4000K	15W	1050 / 80 CRI	White	50,000 HRS.
<b>S4-RKT recessed mounting kit for 4" cans. SOLD SEPARATELY</b>						
<b>S6-RKT recessed mounting kit for 6" cans. SOLD SEPARATELY</b>						