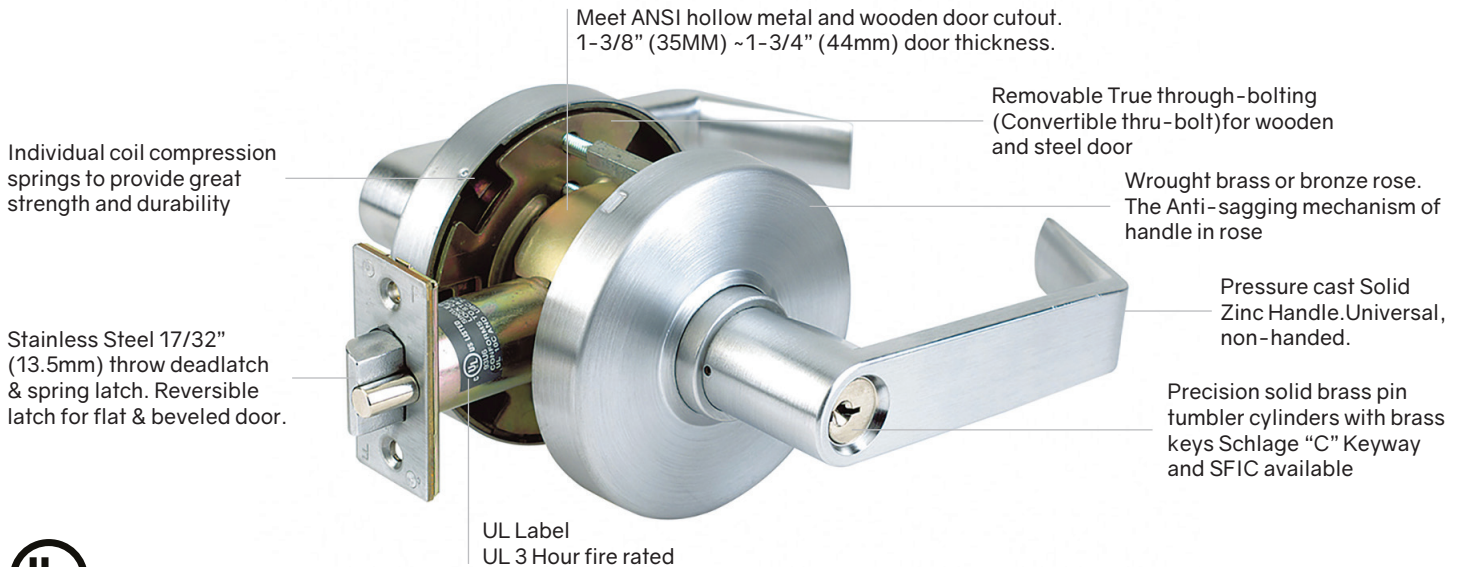


11L GRADE 1 HEAVY DUTY COMMERCIAL LEVERSET



SPECIFICATIONS

Certifications:

- UL Certified (R39148), 3 hour fire rating certified
- ADA compliant

Door Thickness:

- 1-5/8" (40mm) to 1-3/4" (44mm)

Backset:

- 2-3/4" (70mm) standard

Latch Front:

- 1-1/8" (29mm) x 2-1/4" (57mm)

Latch Bolt:

- Stainless Steel 17/32" (13.5mm) throw

Strike:

- ANSI (ASA) curved lip strike standard

Cylinder & Keys:

- Precision solid brass pin tumbler cylinders with nickel silver brass 2 keys
- Schlage "C" keyway standard
- SFIC available for select functions/finishes

Limited Warranty:

- Seven-year Mechanical

Flexibility:

- Removable convertible post

Free wheeling mechanism (clutch):

- When the outside lever is locked, it will rotate freely up and down while remaining securely locked

Finish:


- Satin Chrome (C26D)
- Black (C19) available with extra lead time

Function:


- Passage (10)
- Privacy (40)
- Entry (53)
- Classroom (70)
- Classroom Double (72)
- Storeroom (80)
- Storeroom Double (82)

TECHNICAL DIMENSIONS


Lever (L):



Flat Rose (F):




Door Preparation:

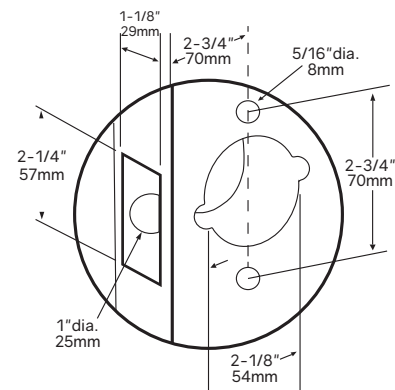

HOW TO ORDER







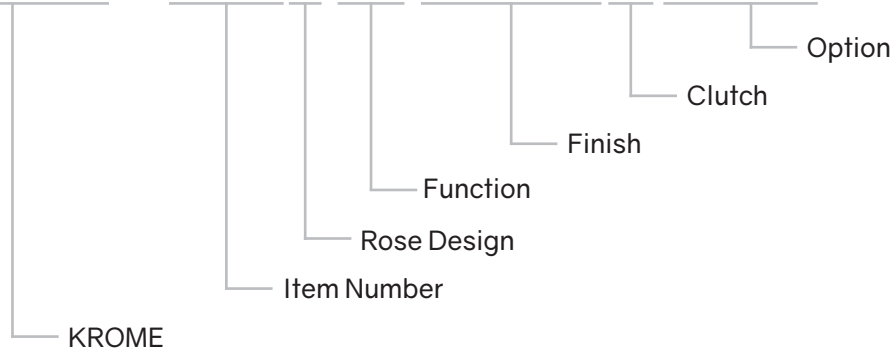
K R O M - 1 1 L F 5 3 C 2 6 D C S F I C



Item Number	Rose	Function	Finish	Clutch	Option
11L	Flat (F)	Dummy (00) Passage (10) Double Storeroom (82) Double Classroom (72)	Satin Chrome (C26D)		
		Privacy (40)	Satin Chrome (C26D)	Clutch (C)	
		Entry (53) Classroom (70) Storeroom (80)	Satin Chrome (C26D)	Clutch (C)	Small Format Interchangeable core (SFIC)

Note: For functions 53, 70, and 80, leave option black for standard Schlage "C" keyway

FUNCTIONS

Outside	Inside	Type	ANSI	Function Description
		Dummy (00)		Lever acts as pull only; no operation
		Passage (10)	HF 75	- Latchbolt by lever either side - Both levers always free
		Privacy (40)	HF 76	- Latchbolt by lever either side, except when push button locks outside lever. (Lever handle is free-wheeling in locked position) - Outside lever locked by push button - Outside lever unlocked by emergency release tools by rotating inside lever or by closing door
		Entry (53)	HF81	- Deadlocking latchbolt by either side except when turn button locks outside lever (Lever handle is free wheeling in locked position) - Pushing turn button locks outside lever, requiring use of key outside to unlock - Turning inside lever unlocks outside lever - Pushing in and turning button locks outside lever, requiring key at all times. - Turning inside lever does not unlock outside lever until button is manually turned to unlocked position
		Classroom (70)	HF 84	- Deadlocking latchbolt by lever either side except when key outside locks outside lever (Lever handle is free-wheeling in locked position) - Outside lever unlocked by key outside - Inside lever always free
		Storeroom (80)	HF 86	- Deadlocking latchbolt by key in outside lever or by rotating inside lever (Lever handle is free-wheeling in locked position) - Outside lever always locked - Inside lever always free
		Double Classroom (72)	HF 88	Key in either lever locks or unlocks its own lever independently
		Double Storeroom (82)	HF 87	- Lever is rigid on both sides - Lever operated by key only on both sides