

Important Note on Hole Cutout Size!

<u>These style doors require a hole cutout with radius corners</u> – If you try to mount this door in a cutout with square corners, the frame will not cover the opening completely (See Exhibit 1)

<u>If you do not already have an existing cutout</u>, it is best to wait until you receive the door. Hold the door in its desired mounted location, and then trace around the c utout surface to draw your cutout hole.

If you already have an existing cutout with square corners you can either-

- a. Consider purchasing a Starboard framed door which installs in square corners
- b. Expand your cutout by 9/16" in all directions while cutting a radius in the corners. This will effectively increase your opening width by 1 1/8" as illustrated in exhibit 2.

Note: Make sure that you order a door that will fit your (now larger) hole cutout.

*For Questions on this or anything else. Please feel free to give us a call at (866)-633-7961!

Exhibit 1 -


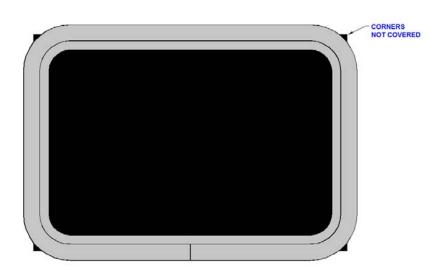


Exhibit 2 -

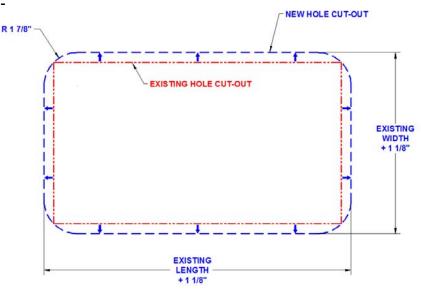

For questions please feel free to give us a call at 866-633-7961!

Be sure to visit us online at www.boatoutfitters.com