



25 GRAND

Double Solids, Heavy Traffic Floor Finish

DESCRIPTION

A high solids, metal interlock combination floor sealer and long-lasting, clear, acrylic floor finish. Easy to apply with no "mop drag." Levels beautifully and dries to that much desired wet look.

BENEFITS

HIGH SOLIDS: The quick answer to building the necessary tough foundation for spray buff floor maintenance.

EASY APPLICATION: Though high in solids, each coat lays down beautifully with no mop drag or streaks.

ALL ACRYLIC: Leaves a perfectly clear, non-yellowing film that won't black mark.

SUPER GLOSS: Dries to a high gloss and maintains its gloss under heavy traffic.

METAL INTERLOCK: In spite of its resistance to water and detergents, 25 Grand can be easily removed with its companion stripper when desired.

VERSATILE: May be used on vinyl, VAT, VCT, linoleum, marble, terrazzo, concrete, brick, flagstone, epoxy and other resilient and non resilient floors.

HOW TO USE


PREPARATION: May be applied over other hard, non-wax floor finishes if they are clean and in good condition, but for best results we suggest stripping with our companion stripper. Then rinse thoroughly and allow floor to dry.

APPLICATION: Apply a thin uniform coat in a figure eight motion using a clean finish mop or applicator.

Avoid contact with finish as it dries. Allow each coat to dry 20-30 minutes before applying a next coat or walking on floor.

NOTE: Humid conditions may require longer drying times between coats.

MAINTENANCE: Dust and damp mopping will keep floors bright and shiny. This finish is an excellent base for spray buffing.

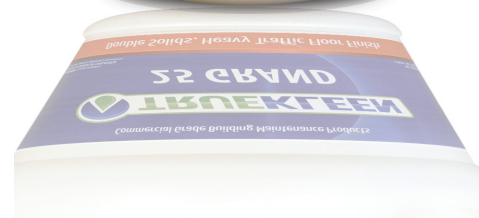

SPECIFICATIONS

APPEARANCE.....	Milky liquid
SOLIDS CONTENT.....	25 ± 0.5%
ODOR.....	Characteristic
SPECIFIC GRAVITY.....	1.020 ± 0.005
DENSITY.....	8.51 ± 0.05 lb/gal
BOILING POINT.....	Near 212°F
pH.....	8.5 ± 0.5
FLASH POINT.....	None to boiling
STABILITY.....	One year minimum

PRODUCT CODE.....XSF