




Peugeot 3008 Hybride


5 doors/ 5 places / SUV
MHEV (2024/ ->)



Note: The Rescue Sheet depicts a LHD vehicle (as allowed under the ISO 17840-1). All components (other than steering wheel and passenger airbag) are located in the same position in the Aust/NZ RHD model.

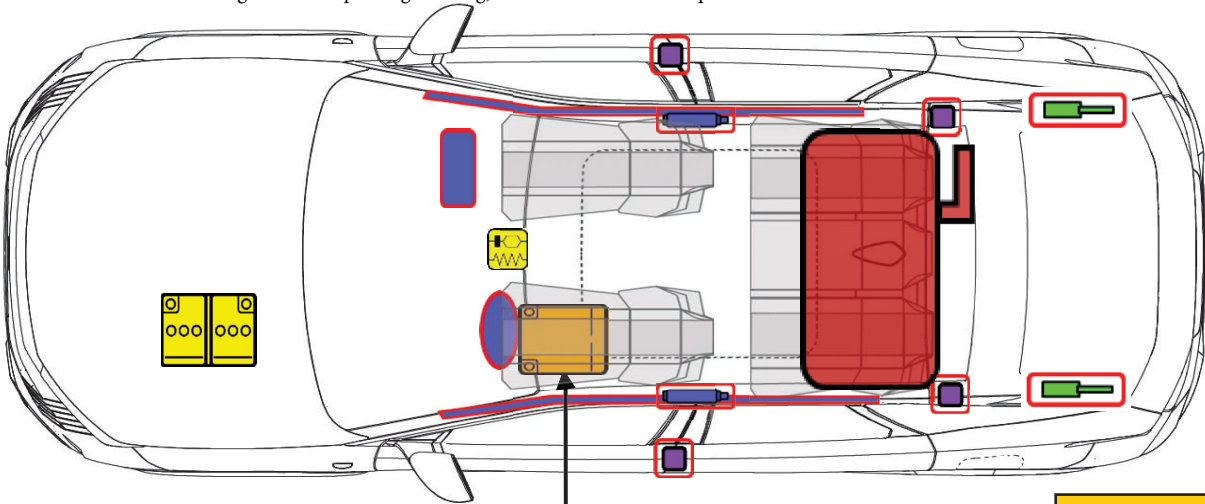

48V / 0.9 kWh
Li-ion

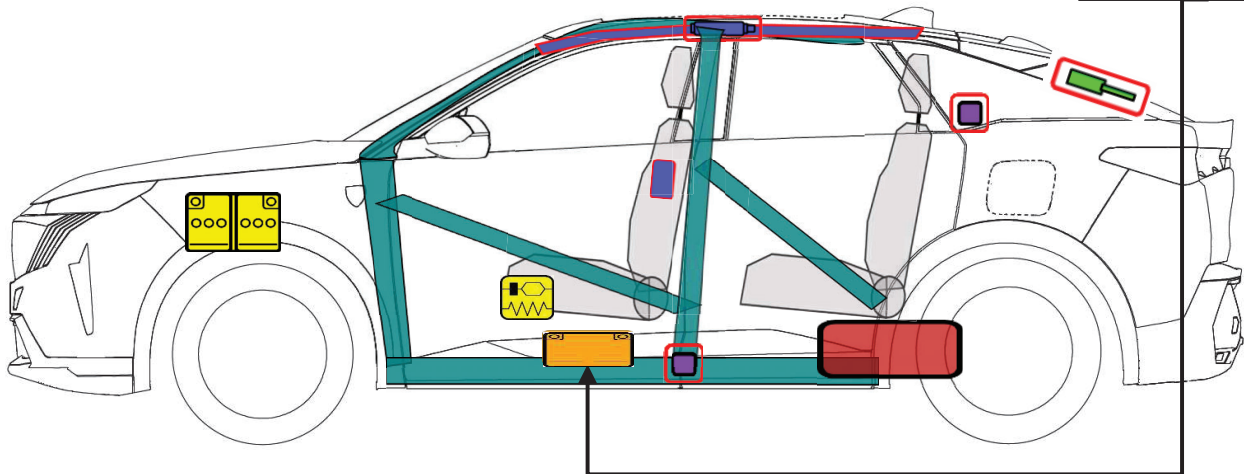

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		
			Vérin à gaz / ressort précontraint		High strength zone				
	Battery pack, high-voltage		High voltage power cable						
					Fuel tank content gasoline/ethanol				

	ID N°	Version N°	Version date	Page
	01365_24_00111	OR	30.09.24	1/4


1. Identification / recognition



LACK OF ENGINE NOISE DOES NOT MEAN VEHICLE IS OFF, SILENT MOVEMENT OR INSTANT RESTART CAPABILITY EXISTS UNTIL VEHICLE IS FULLY SHUT DOWN. WEAR APPROPRIATE PPE.



Model name

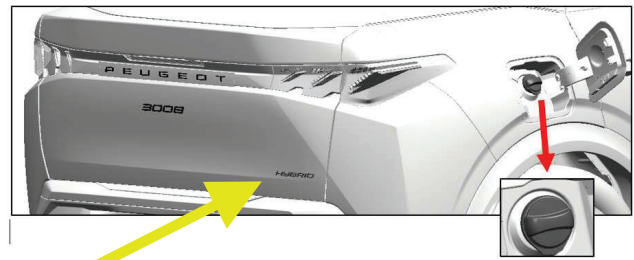

HYBRID



**SP 95 (E5 ou E10)
55 l**

2. Immobilisation / stabilisation / lifting

Immobility


1




2



3

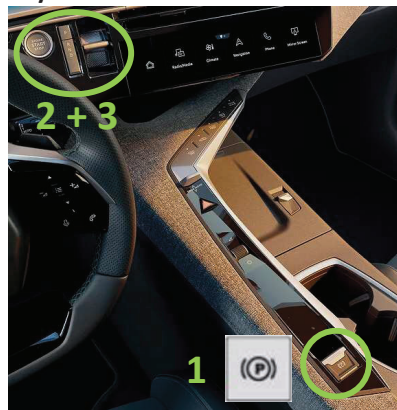


Stabilization/lifting points

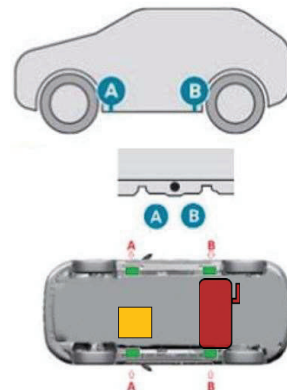

Do not place cribbing such as wooden blocks or rescue air lifting bags under the fuel system or high voltage power cables. Doing so may result in fuel leaks, fire, or electric shock.



3. Disable direct hazards / safety regulations

Main disabling method




1

2

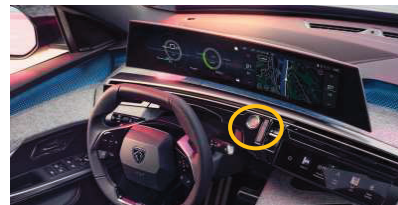


3




	ID N°	Version N°	Version date	Page
	01365_24_00111	OR	30.09.24	2/4


4. Access to the occupants

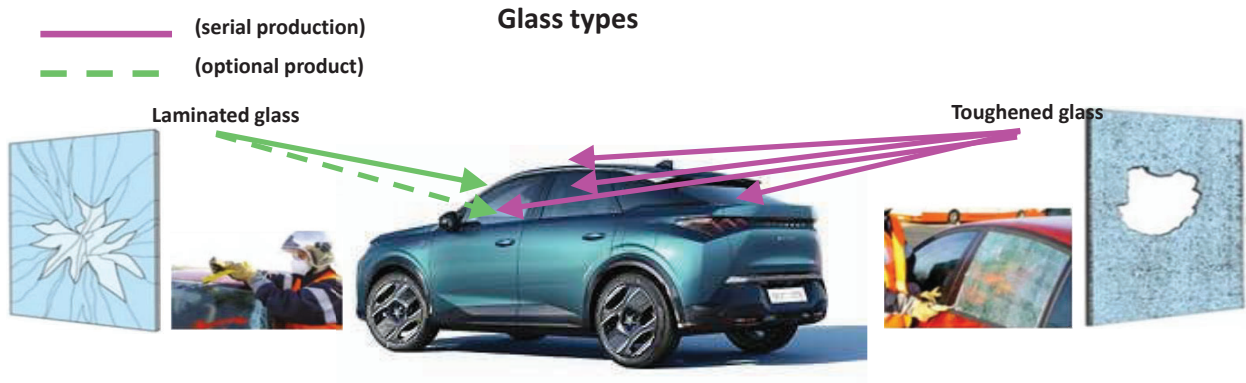


High strength steel body



Seat adjustment

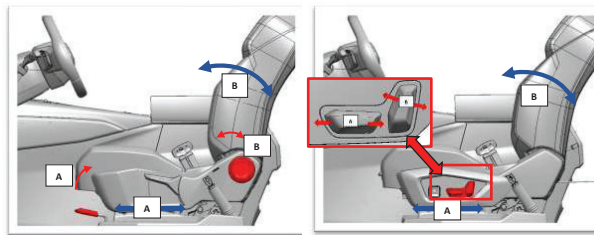

Steering column adjustment



5. Stored energy / liquids / gases / solids

	12V	
	48V Li-ion 0.9 kWh	
	1234 YF	
	SP 95 (E5 ou E10) 55 l	



Si du liquide de refroidissement s'échappe du système de refroidissement de la batterie, il existe un risque de réaction thermique dans la batterie basse tension 48v.
Surveillez la température de la batterie basse tension 48v



6. In case of fire




Use large amount of water





8. Towing / transportation / storage

Location front hook



Location rear hook

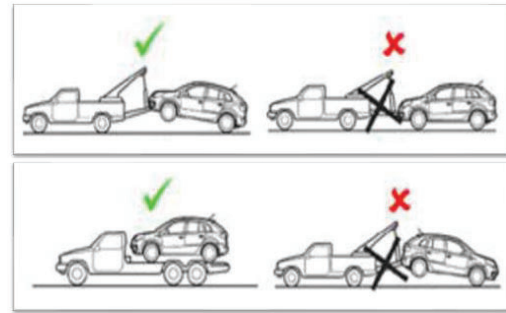

STORE AT SAFE DISTANCE FROM OTHER VEHICLES !




RE-IGNITION POSSIBLE !



9. Important additional information



12V



1XV

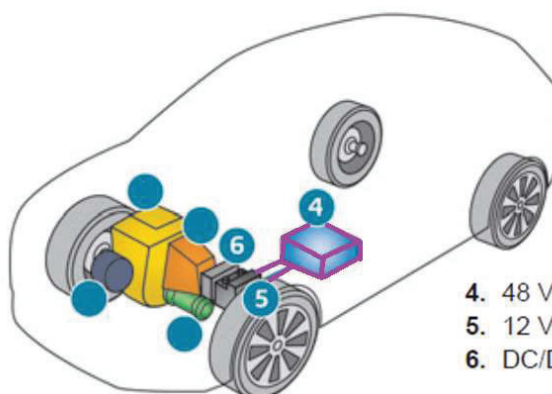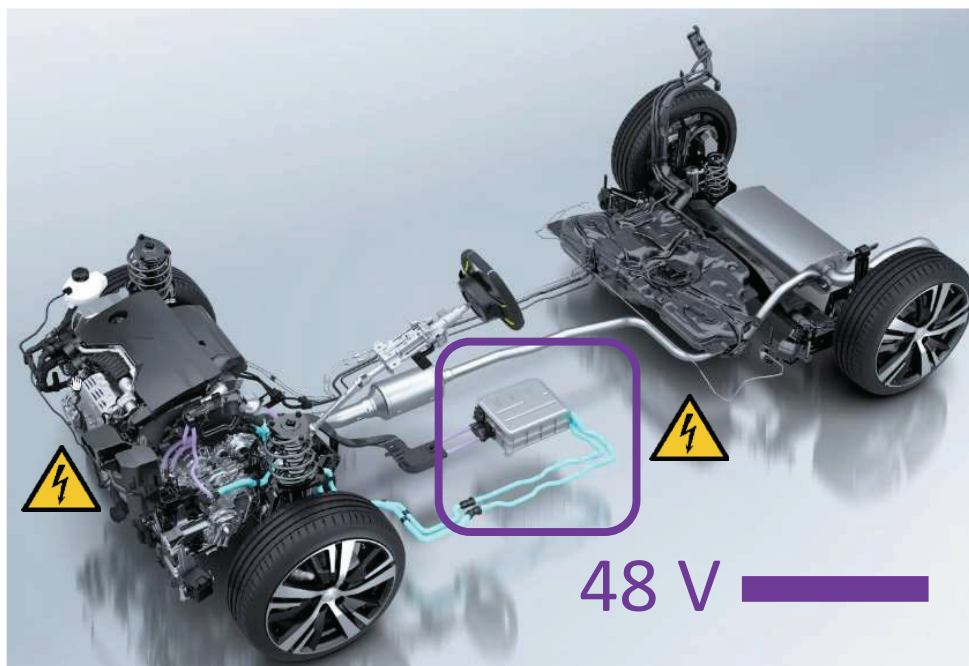

- 4. 48 V traction battery
- 5. 12 V accessory battery
- 6. DC/DC converter

	ID N°	Version N°	Version date	Page
	01365_24_00111	OR	30.09.24	4/4