



**MITSUBISHI****ASX****Phases 1&2**

(2023 -)

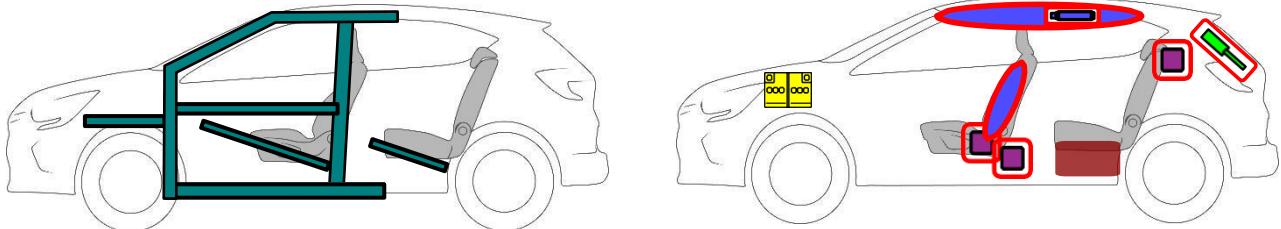

Note: The Rescue Sheet depicts a LHD vehicle (as allowed under the ISO 17840-1). All components (other than steering wheel and passenger airbag) are located in the same position in the Aust/NZ RHD model.

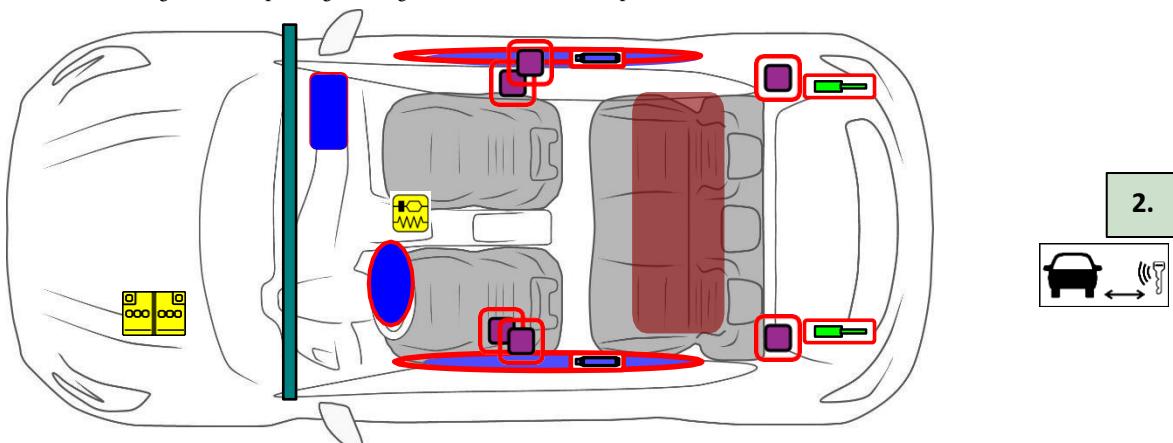

	Airbag		Stored gas inflator		Seat belt pretensioner		SRS control unit		
	Battery low voltage		Gas strut / Preloaded spring		High strength zone		Zone requiring special attention		Fuel tank content gasoline/ethanol

In consultation with



MINISTÈRE DE L'INTÉRIEUR

Internal reference	Date	Version	Page
RS-ASX GD ph1&2-2024	01/08/2024	1	1 / 4

1. Identification / recognition



2. Immobilisation / stabilisation / lifting

Immobilisation





Engine shutdown




3. Disable direct hazards / safety regulations


12 Volts Battery

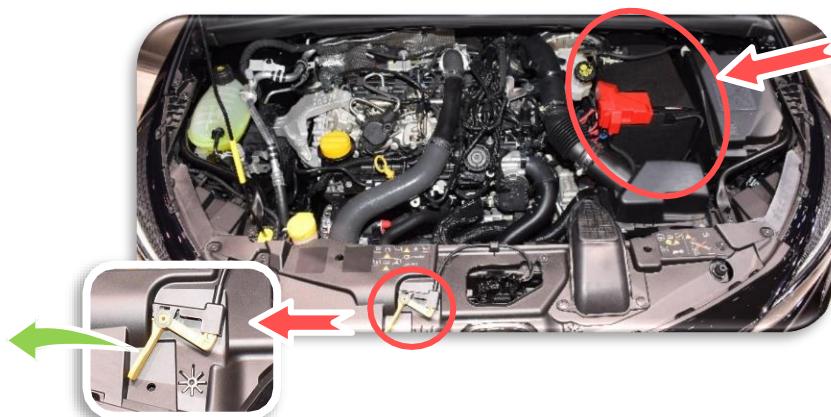


4. Access to the occupants

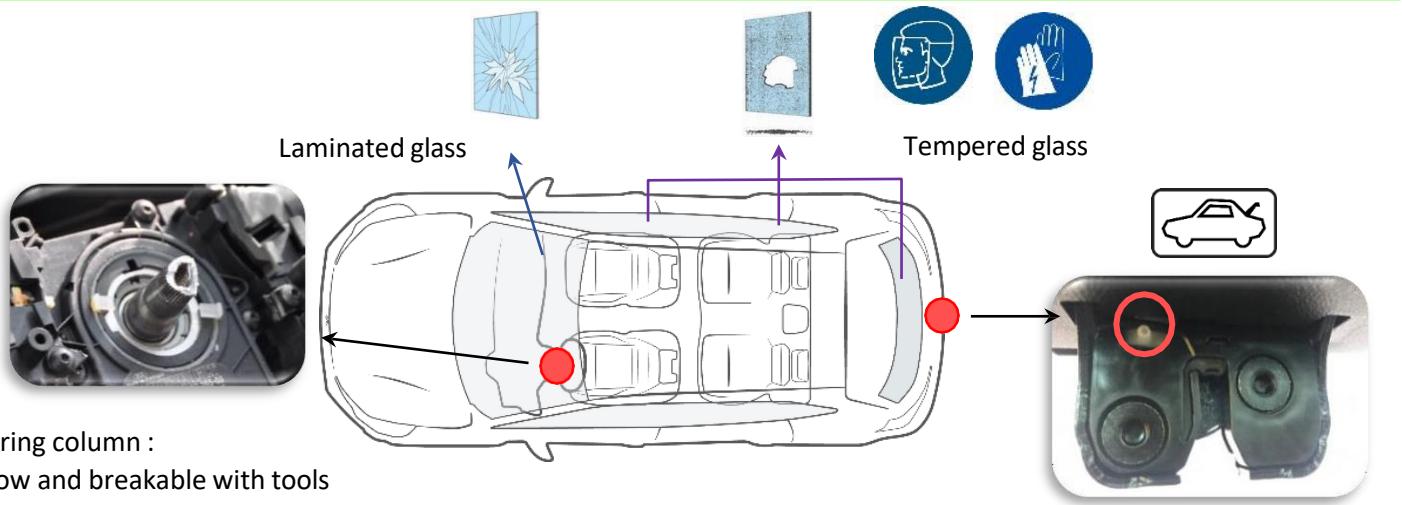

POSSIBLE MOVEMENT OF SEATS

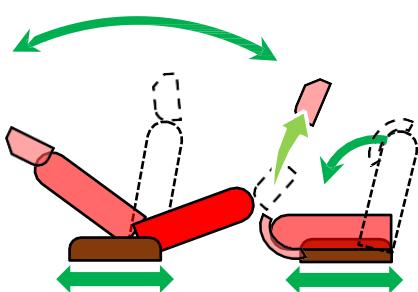

HARDENED STEEL

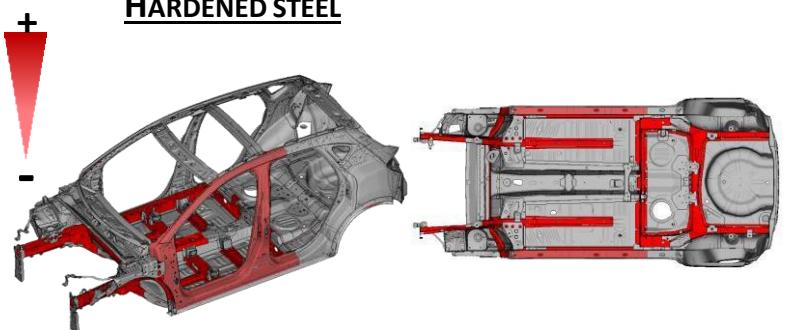

5. Stored energy / liquids / gases / solids


	48 L	
	46 L	

6. In case of fire

GAS STRUTS



Risk of missile effect of gas struts

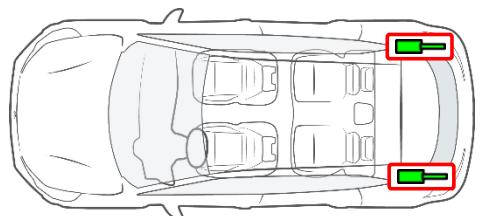


10. Explanation of pictograms used



Vehicle running on group 2 liquid fuel



Vehicle running on group 1 liquid fuel (diesel, biodiesel, etc.)



Remove smart key



engine hood



boot



Flammable



Hazardous to the human health



Environmental hazard

Face shield



Breathing apparatus (BA)



Use water to extinguish the fire

