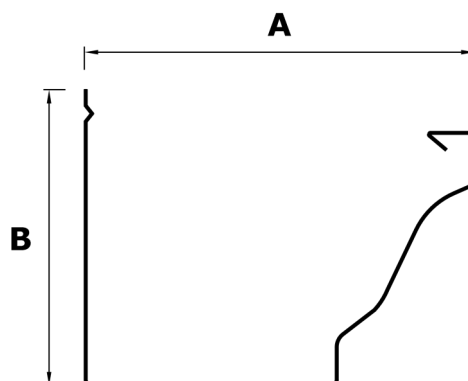
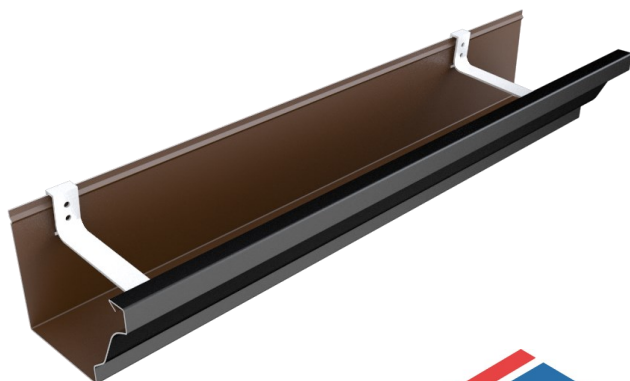


**MUSTANG****Seamless 5" Gutter**

Gutter Size A & B	Maximum length	Joint	Product Code
125(5") x 87mm	30m+	Not required	CL8C9300

**Product Description**

Mustang Seamless aluminium gutters are the perfect alternative to UPVC. Backed by a BBA certificate, this superior system provides 30+ years of maintenance free use. Manufactured onsite, the system has no joints and is made to length creating a waste free sustainable solution that is also 100% recyclable at the end of its functional life.

**Properties**

Formed from 0.9mm aluminium coil—alloy 3105B H45  
 Tested under BBA certificate no. 91/2625  
 Other sizes available  
 Coated with an Abrasion Resistant System (ARS) in a range of colours including; Black, White, Brown, light and dark Grey.

**Jointing**

The main advantage of seamless gutters is that they do not have any joints, as the material is produced in lengths on site. When a corner or stop end is required, leak free interlocking components are combined with the long lengths to create unbroken lengths of up to 30 metres.

**Functional Life Expectancy**

When installed by an ARP Approved Installer, the BBA certificate states that the product will not require any maintenance for 30 years and has a life expectancy in excess of this period. Further information is available from the ARP website or BBA certificate no - 91/2526.

**Specification Information**

**Clause:** R10/311 Rainwater Drainage Systems

**Product:** Mustang Seamless Gutter System

**Manufacturer:** ARP Ltd  
 Unit 2 Vitruvius Way  
 Meridian Business Park  
 Braunstone, Leicester  
 LE19 1WA

**Handling & Storage**

Gutters, downpipes and fittings, particularly with polyester powder coat finish should be handled with care and should preferably be stored under cover on racks to prevent scratching. All lengths are supplied in protective polythene wrapping, components suitably packed in boxes. If painted products are to be stored outside, cover with tarpaulin to guard against water ingress into the protective polythene. Mill finish items should be stored undercover to avoid uneven oxidation prior to being fitted.

**Maintenance**

In order to maintain proper working order, gutters should be periodically cleaned out and any built-up debris removed. Check all fixings are secure and take any remedial action to rectify if necessary. To maximise the life of the decorative paint finishes, all parts should be washed down with clean water, at least every 12 months and any damage repaired. In marine/industrial environments and dependent on distance from either the coastline or source of pollution, this period may need to be shortened to 6 or 3 months. Records of the cleaning schedule and frequency should be kept and maintained. Please enquire of our sales office, should more information be required.

**Further Information**

Please visit [www.arp-ltd.com](http://www.arp-ltd.com) or contact the ARP team on 0116 289 4400 for any other information.