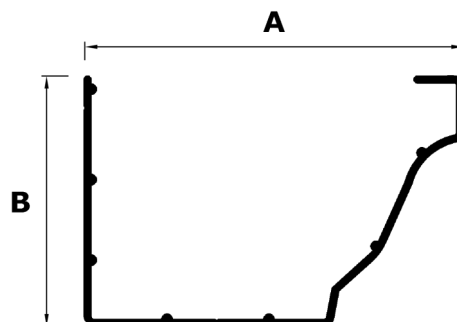


**SENTINEL****Modern Ogee**

Gutter Size A & B	Maximum length	Spigot	Product Code
200 x 150mm	3000mm	Internal	86MOG3

**Product Description**

Extruded aluminium gutters are a fantastic option for new build and refurbishment applications due to their smooth lines, clean appearance and robust properties. This large profile can collect a considerable amount of rainwater run off and provide drainage for the largest all pitched roofs, like school and commercial buildings.

**Properties**

Made from aluminium alloy 6063 T6 and LM6  
100% recyclable, lightweight and strong  
Radius gutters - Faceted radius available  
Other profiles available

Supplied Mill Finished (uncoated) or coated on ARP's in-house Polyester Powder Coating line to clients choice of RAL or BS standard colours.

**Jointing**

This gutter is jointed using loose internal unions and are bolted together for additional strength. Lengths are butt jointed, then a low modular sealant, such as Arbosil 1096, is applied and the union is then bolted to both sides creating a joint which will stand up to thermal movement.

For step by step instructions please refer to ARP product installation guide.

**Functional Life Expectancy**

ARP qualifies that when installed correctly and maintained in accordance with its product guidelines and O&M procedure, its products are designed to give a minimum effective functional life expectancy of 30 years.

**Specification Information**

**Clause:** R10/311 Rainwater Drainage Systems

**Product:** Sentinel Modern Ogee Gutter System

**Manufacturer:** ARP Ltd  
Unit 2 Vitruvius Way  
Meridian Business Park  
Braunstone, Leicester  
LE19 1WA

**Handling & Storage**

Gutters, downpipes and fittings, particularly with polyester powder coat finish should be handled with care and should preferably be stored under cover on racks to prevent scratching. All lengths are supplied in protective polythene wrapping, components suitably packed in boxes. If painted products are to be stored outside, cover with tarpaulin to guard against water ingress into the protective polythene. Mill finish items should be stored undercover to avoid uneven oxidation prior to being fitted.

**Maintenance**

In order to maintain proper working order, gutters should be periodically cleaned out and any built-up debris removed. Check all fixings are secure and take any remedial action to rectify if necessary. To maximise the life of the decorative paint finishes, all parts should be washed down with clean water, at least every 12 months and any damage repaired. In marine/industrial environments and dependent on distance from either the coastline or source of pollution, this period may need to be shortened to 6 or 3 months. Records of the cleaning schedule and frequency should be kept and maintained. Please enquire of our sales office, should more information be required.

**Further Information**

Please visit [www.arp-ltd.com](http://www.arp-ltd.com) or contact the ARP team on 0116 289 4400 for any other information.